



RESIDUAL CURRENT CIRCUIT BREAKER

EKL6-100
EKL6-100H

No.288th. Wei 17 Road, Economic Development
Zone, Yueqing City Zhejiang China.
Tel: 0086-577-62718777 Fax: 0086-577-62774090
Email: sales@etek-china.com

Thank you for choosing EK Series Residual Current Circuit Breakers.
Please read this manual before installation, operation and maintenance.

OVERVIEW

Residual Current Circuit Breaker is a switch that must be used against electrical shocks occurring in the respective grid and endangering human lives or against fires resulting from the mistakes in isolation. Residual Current Circuit Breaker is produced in the following two types with its fully "electromechanical" operating principle:

- Life Protection (30 mA)
- Fire Protection (300 mA)

STANDARD AND QUALITY CERTIFICATES

IEC/EN61008-1






Technical data

Electrical characteristics	
Standard	IEC/EN61008-1
Type	AC, A, S
Poles	2P(1P+N), 4P(3P+N)
Rated current(A)	16,25,32,40,63,80,100
Rated residual operating current $I_{\Delta n}$ (mA)	30,100,300
Rated frequency	50/60Hz
Insulation voltage (Ui)	230/240V~ (2P) 400/415V~ (4P)
Rated impulse withstand voltage (Uimp)	4 kV

Making and breaking capacity (Im/IΔm)	25/40 A	500 A
	63/100A	10In
Conditional rated short circuit current (Inc/IΔc)		6000, 10000A
Degree of protection	Device only	IP20 IP40 with screw shield
	Device in modular enclosure	IP40 Insulation classe II
Endurance (O-C)	Electrical	> 2 000 cycles
	Mechanical	> 5 000 cycles
Operating temperature		-25°C to +40°C

Tripping Current Range

Lagging Angle	$I_{\Delta n} > 0.01A$	$I_{\Delta n} \leq 0.01A$
0°	$0.35I_{\Delta n} \leq I_{\Delta} \leq 1.4I_{\Delta n}$	$0.35I_{\Delta n} \leq I_{\Delta} \leq 2I_{\Delta n}$
90°	$0.25I_{\Delta n} \leq I_{\Delta} \leq 1.4I_{\Delta n}$	$0.25I_{\Delta n} \leq I_{\Delta} \leq 2I_{\Delta n}$
135°	$0.11I_{\Delta n} \leq I_{\Delta} \leq 1.4I_{\Delta n}$	$0.11I_{\Delta n} \leq I_{\Delta} \leq 2I_{\Delta n}$

Alternative Current Sensitive	Pulsating direct current sensitive	Surge current proof
 <p>They react to AC current which, whether suddenly applied or slowly arising.</p>	 <p>They react to AC and pulsating DC fault current which reach 0 or almost 0 within one time period of the mains frequency.</p>	 <p>RCCB's surge capacity. Not tripping at standardized 8/20 us surge-current waves acc.to VDE 0432 Part 2 with surge current values of up to 250A.</p>




PRODUCT ASSEMBLY

- Product calibrating and programming are performed during manufacturing and each product is offered to sales after a through quality control. There are no maintenance or programming tasks that the users can perform.



WARNING

- Ensure that the power is cut off before the assembly of the products.
- Connection and assembly of the electrical devices should be carried out only by the technical personnel having certificate of competency.



Cable sections

Momentum power for electrical terminal connection

Tools required for product assembly (Allen key, screwdriver etc.)

Suitable panel and rail for product assembly

: 13mm

: 2,5Nm max.


: 5,3-6,0 (including 6,0)

: 35mm Din rail

THINGS TO CONSIDER DURING RESIDUAL CURRENT CIRCUIT BREAKER ASSEMBLY


- The nominal currents of the Residual Current Circuit Breaker should be at values in line with the size of the protected grid.
- The installation should be grounded.
- In two-pole Residual Current Circuit Breaker, one phase and one neutral, and in four-pole Residual Current Circuit Breaker, one phase wire and one neutral wire, three phase wire + one neutral wire should be connected.
- To test Residual Current Circuit Breaker, "Test Monthly" button should be pressed. This test should be repeated once a month. Phase and neutral should never be bypassed to test Residual Current Circuit Breaker.
- Grounding resistance should be maximum 2160 ohm for 30 mA Residual Current Circuit Breaker and 216 ohm for 300 mA Residual Current Circuit Breaker.

PRODUCT FUNCTIONS

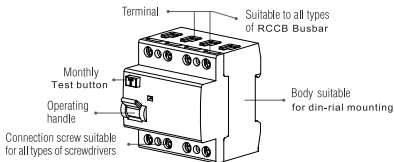

IEC/EN61008-1

Circuit Diagram



Overall and Installation Dimension(mm)

