

ETM1-63DC

Non-Polarity DC Mini Circuit Breaker



Standard: IEC/EN 60947-2

Rated current: 6~63A

Poles: 1P, 2P, 3P, 4P

Rated breaking capacity: 6kA

Insulation voltage: 1200V

Incoming method: According to the wiring diagram

Rated operated voltage: 300VDC(1P), 600VDC(2P), 900VDC(3P), 1200VDC(4P)

Applications



Photovoltaic (PV) Systems



Energy Storage System



Communications and Data Center



Industrial and Automation Equipment

Overview

EKM1-63DC is a non-polarized DC miniature circuit breaker designed for photovoltaic, energy storage, and other high-voltage DC applications. Supporting 6-63A at up to 1200VDC and available in 1P/2P/3P/4P configurations, its polarity-free design simplifies installation, eliminates wiring errors, and enables fast, efficient field deployment.

With high-voltage capability, dependable arc suppression, and precise tripping, it ensures reliable performance and enhanced safety for modern systems.


Product Tips




Technical Data

Standard	IEC/EN 60947-2			
Protection	Overcurrent and short circuit			
Type of trip	Thermal-magnetic			
No. of poles	1P	2P	3P	4P
Rated voltage (Ue)	300VDC	600VDC	900VDC	1200VDC
Rated currents (In)	6, 10, 16, 20, 25, 32, 40, 50, 63A			
Rated insulation voltage (Ui)	1200V			
Rated impulse withstand voltage (Uimp) (1.2/50μs)	6kV			
Rated service short circuit breaking capacity (Ics)	6kA			
Rated ultimate short circuit breaking capacity (Icu)	6kA			
Thermal tripping characteristics	1.05×In No tripping within an hour; 1.3×In Tripping within an hour			
Instantaneous tripping characteristics	B: 4In±20%, C: 8In±20%, K: 10In±20%			
Electrical life	Actual value	>1,000 Cycles		
	Standard value	1,000 Cycles		
Mechanical life	Actual value	>20,000 Cycles		
	Standard value	8500 Cycles		
Contact position indicator	green OFF/ red ON			
Overvoltage category	3			
Pollution degree	3			
Ingress protection	IP40, Wiring port IP20			
Resistance to humidity and heat	Class 2			
Reference temperature	-30°C			
Operating ambient temperature (with daily average ≤35°C)	-25°C ~ +55°C			
Ambient temperature	-30°C ~ +70°C			
Terminal connection type	Cable			
Max. terminal size for cable	16mm ² flexible/ 25mm ² rigid			
Max. tightening torque	2.5N.m			
Installation	Mounting on 35mm DIN rail			
Incoming method	According to the wiring diagram			


Tripping Characteristic

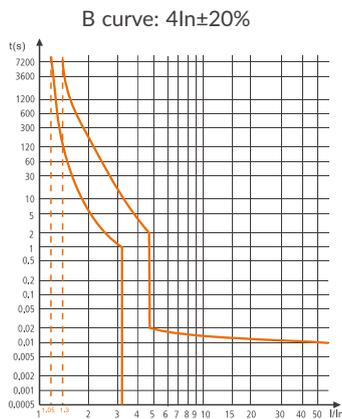

- $I=1.05I_n, t \geq 1h$, not trip
- $I=1.3I_n, t < 1h$, trip
- $I=2.55I_n, t \geq 1-120s (I_n=6-63A)$
- Instantaneous trip: $4I_n \pm 20\%$

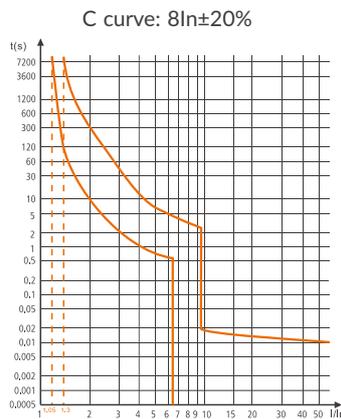

- $I=1.05I_n, t \geq 1h$, not trip
- $I=1.3I_n, t < 1h$, trip
- $I=2.55I_n, t \geq 1-120s (I_n=6-63A)$
- Instantaneous trip: $8I_n \pm 20\%$

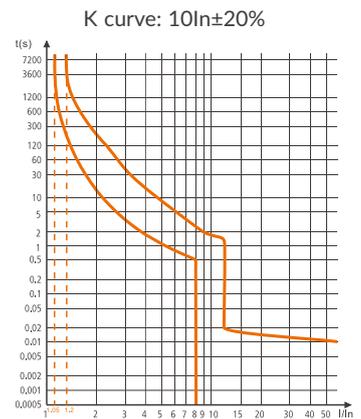

- $I=1.05I_n, t \geq 1h$, not trip
- $I=1.3I_n, t < 1h$, trip
- $I=2.55I_n, t \geq 1-120s (I_n=6-63A)$
- Instantaneous trip: $10I_n \pm 20\%$


Temperature Derating Table

Rated voltage (Ue)	Correction factor for ambient temperature																		
	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	5°C	10°C	15°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C	55°C	60°C
16A	1.24	1.22	1.20	1.18	1.16	1.14	1.11	1.09	1.07	1.05	1.02	1.00	1.00	1.00	1.00	0.90	0.87	0.84	0.81
20A	1.23	1.21	1.19	1.17	1.15	1.13	1.11	1.09	1.07	1.05	1.02	1.00	1.00	1.00	1.00	0.90	0.87	0.84	0.81
25A	1.24	1.22	1.20	1.18	1.16	1.14	1.11	1.09	1.07	1.05	1.02	1.00	1.00	1.00	1.00	0.90	0.87	0.85	0.82
32A	1.23	1.21	1.19	1.17	1.15	1.13	1.11	1.09	1.07	1.04	1.02	1.00	1.00	1.00	1.00	0.91	0.88	0.85	0.78
40A	1.23	1.21	1.19	1.17	1.15	1.13	1.11	1.09	1.07	1.05	1.02	1.00	1.00	1.00	1.00	0.91	0.88	0.85	0.82
50A	1.23	1.21	1.19	1.17	1.15	1.13	1.11	1.09	1.07	1.05	1.02	1.00	1.00	1.00	1.00	0.91	0.88	0.85	0.82
63A	1.27	1.25	1.22	1.17	1.18	1.15	1.13	1.11	1.08	1.05	0.87	1.00	1.00	1.00	1.00	0.88	0.85	0.82	0.78

Derating of Altitude


Altitude (m)	2000	3000	4000	5000
Rated current (In)	1	0.97	0.91	0.86
Rated insulation (Ui)	1	0.90	0.82	0.76
Power-frequency dielectric strength	1	0.90	0.82	0.76
Rated impact tolerance voltage (Uimp)	1	0.90	0.82	0.76
Values of rated shour-circuit capacity (Icn)	1	0.87	0.77	0.67
Electrical life (Cycles)	1	0.87	0.77	0.67

Derating of Altitude

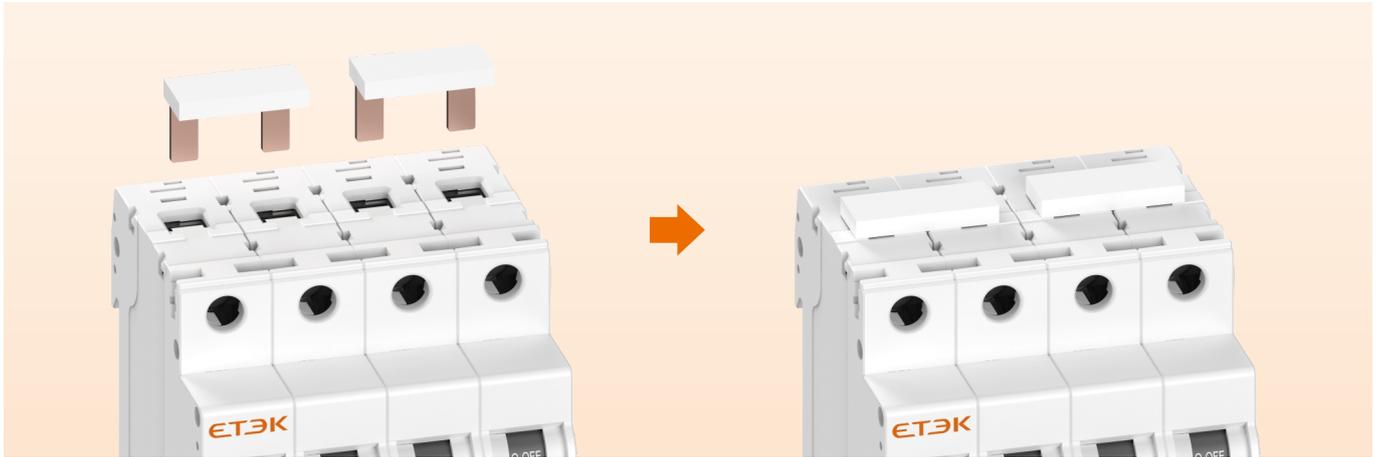

Note: Configure the external bridging busbars as required by the circuit diagram.

Wiring Diagram

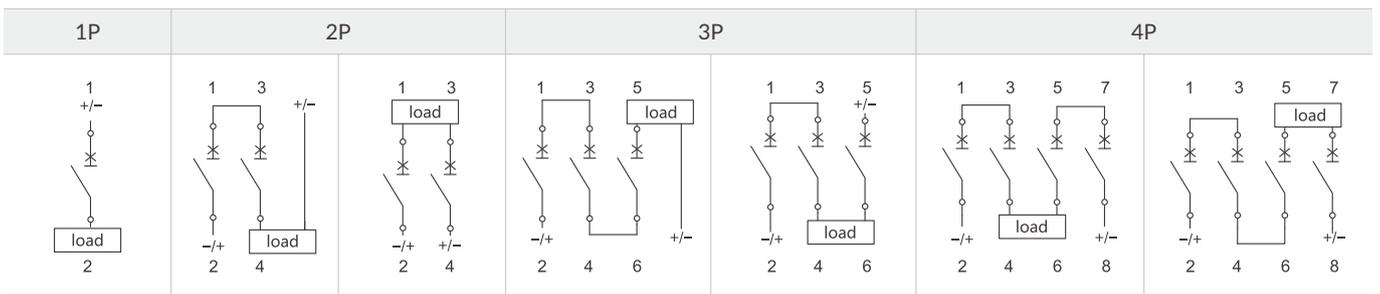

Dimension (mm)

