

## T Series

# Circuit Protection Solutions

- MCB
- RCCB
- RCBO
- AFDD
- Modular Accessories



# COMPANY INTRODUCTION



Zhejinag Wenzhou Factory



**Zhejiang ETEK Electrical Technology Co., Ltd.** is a professional manufacturing company specializing in the research, development, production, and sales of low-voltage electrical appliances. Established in 2011 and headquartered in Wenzhou, Zhejiang Province, ETEK Electric operates two modern manufacturing bases in Wenzhou and Wuhu, covering an area of 40,000 square meters. The company employs over 500 staff, including more than 20 R&D and technical professionals.

ETEK Electric has multiple production workshops for mold design, parts manufacturing, welding, and assembly. Additionally, it operates multiple automated production lines for MCB and RCCB. Its product portfolio includes MCB, RCCB, RCBO, AFDD, MCCB, ACB, EV Chargers, and Photovoltaic DC products, which are widely used in residential, commercial, and industrial sectors.

ETEK Electric has established its own low-voltage electrical testing center, where testing projects meet international IEC standards. The company has obtained ISO9001, ISO14001, and ISO45001 certifications, and its products are certified by international standards such as CB, TUV, VDE, CE, RoHS, among others.



40k+  
m<sup>2</sup>  
Floor Area



100+  
Export Countries



30+  
Brand Agents



15+  
Years  
Industry Experience



20 Mio+  
Poles  
Annual Production



≥50%  
Automation Rate



## Anhui Wuhu Factory



With over 100 national patents, ETEK Electric continues to master core technologies in circuit breakers and remains committed to building its independent brand. The "ETEK" trademark is registered in over 80 countries, with products exported to more than 100 regions, including Europe, South America, the Middle East, Africa, and Southeast Asia.

Additionally, ETEK Electric supports OEM, ODM, OBM, SKD, CKD, and other business cooperation models, offering a complete suite of services including market cultivation, technical training, and assistance with factory construction.

Looking to the future, ETEK Electric is committed to becoming a globally renowned manufacturer in the power distribution and electrical industry, safeguarding the power safety of its customers around the world and contributing to the development of green and digital energy.



### Values

- Integrity
- Focus
- Innovation
- Win-win



### Vision

Dedicated to becoming a globally renowned manufacturer in the power distribution equipment industry.



### Mission

Manufacturing safer and smarter distribution electrical products to support the development of green and digital energy

# QUALITY ASSURANCE



## System Certificate




## Product Certificate



# GLOBAL REACH

- "ETEK" registered in 80+ countries
- Exports to 100+ countries
- Supports OEM, ODM, OBM, SKD, and CKD partnerships

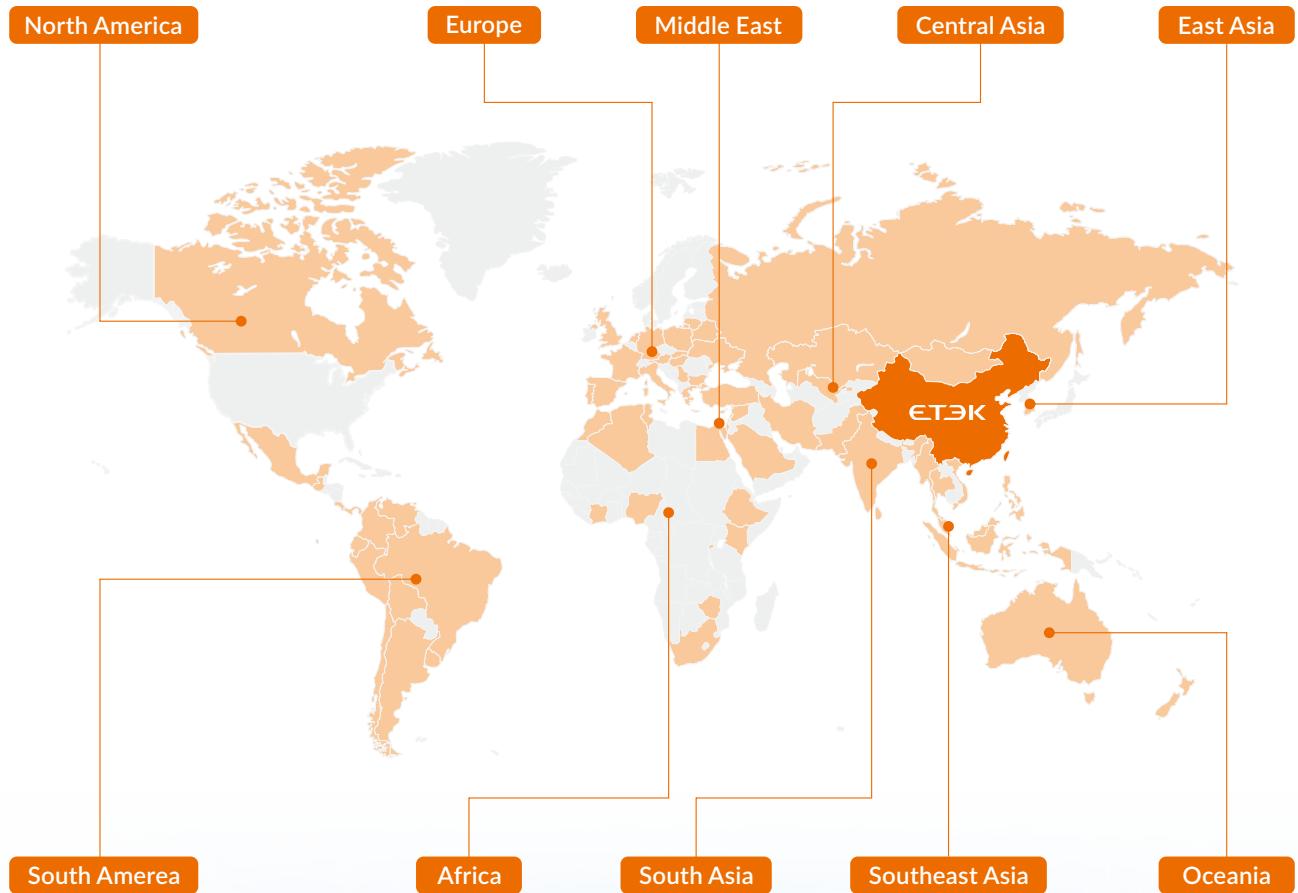

# CONTENTS

## 01 / MCB

Mini Circuit Breaker

MCB ETM1-63S 4.5kA	01
MCB ETM1-63X 6kA	06
MCB ETM1-63 6kA	11
MCB ETM1-63H 10kA	16
MCB ETM1-63UH 15kA	21
Non-Polarity DC MCB ETM1-63DC 6kA	26

## 02 / RCBO

RCCB with Overcurrent Protection

RCBO ETL2-63(H) 6/10kA	31
RCBO ETL3-40M(H) 6/10kA	36
RCBO ETL3-63M(H) 6/10kA	41
RCBO ETL3-63(H) 6/10kA	46
B Type RCBO ETL3-63B 10kA	51
RCBO ETL5-63(H) 6/10kA	56
B Type RCBO ETL5-63B 10kA	61

## 03 / RCCB

Residual Current Circuit Breaker

RCCB ETL1-63(H) 6/10kA	66
B Type RCCB ETL1-63B 10kA	71

## 04 / AFDD

Arc Fault Detection Device

AFDD ETM1-63(H)AFD 6/10kA	76
---------------------------	----

## 05 / Isolator Switch

ETD1-125	81
ETD1-125M/L	85

## 06 / Accessories

Circuit Breaker Accessories	90
-----------------------------	----

## 07 / Other Moudular Devices

ETMC Modular Contactor	96
ETLR-16 Modular Impulse Relay	104

# ETM1-63S

Mini Circuit Breaker



#### IP20 protection

Finger protected connection terminals.

#### Modular accessory expansion

Suitable for the quick and easy mounting of additional components, such as auxiliary switches and fault signal contacts.

#### EAN code

The shell comes with pad printed EAN code.

#### Standard

IEC 60898-1: Electrical accessories - Circuit-breakers for overcurrent protection for household and similar installations - Part 1.

#### Multiple termination

Both incoming and outgoing terminals are suitable for: normal cable, pin type busbars.

#### Contact position indication

Reliable recognition of the switching status through red/green position indicating device.

#### RoHS compliant

ETEK uses environmentally friendly state-of-the-art housing material. With the latest generation of halogen free thermoplastics for MCBs, it is now possible to recycle the MCBs completely which reduces environmental pollution. T Series entire range of circuit protection devices conform to RoHS Standards.

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment



Electrical safety assurance in public facilities

## ■ Overview

ETM1-63S Series Miniature Circuit Breaker is specifically designed for terminal power distribution protection in commercial office buildings, residential premises, and general industrial applications. It is suitable for circuits with AC 50/60Hz, a rated voltage of 110/240/415V, and a rated current up to 63A.

Featuring overload and short-circuit protection, it can also be used for infrequent line switching operations under normal conditions. With a rated short-circuit capacity (Icn) of up to 4.5kA, it ensures reliable circuit protection.

This product incorporates finger-safe combination terminals and provides contact open/close status indication, significantly enhancing operational safety. Additionally, various modular accessories can be configured to meet diverse application needs.

## ■ Product Tips




- |   |                                     |   |                                           |
|---|-------------------------------------|---|-------------------------------------------|
| 1 | Reversible line and load connection | 4 | Rated current up to 63A                   |
| 2 | EAN-13 barcodes                     | 5 | Contacts position indication window       |
| 3 | The position of handle lock         | 6 | Rated short circuit breaking capacity 6kA |

## Technical Data


General data	
Protection	Overcurrent and short circuit
Type of trip	Thermal-magnetic
No. of poles	1P, 2P, 3P, 4P
Rated operational voltage (Ue)	1P: 110/230V, 120/240V, 230/400V, 240/415V 2P,3P,4P: 230/400V, 240/415V, 400/415V
Rated current (In)	1, 2, 3, 4, 5, 6, 8, 10, 13, 16, 20, 25, 32, 40, 50, 63A
Rated frequency	50/60Hz
Rated insulation voltage (Ui)	500V
Rated impulse withstand voltage (Uimp) (1.2/50μs)	6kV
Dielectric test voltage	2kV (50/60Hz,1 min.)
Fire resistance (glow-wire test)	960±15°C (Enclosure); 650±10°C (Handle)
Pollution degree	2
Data acc. to IEC/EN 60898-1	
Rated short-circuit capacity (Icn)	4.5kA
Rated service short-circuit breaking capacity (Ics)	4.5kA
Thermal tripping characteristics	1.13×In No tripping within an hour; 1.45×In Tripping within an hour
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In; D: 10In-20In
Mechanical data	
Electrical life	4,000 Cycles
Mechanical life	20,000 Cycles
Contact position indication	green OFF / red ON
Protection degree	IP20
Reference temperature	30°C
Operating ambient temperature (with daily average≤35°C)	-25°C ~ +55°C
Storage temperature	-30°C ~ +70°C
Installation	
Terminal connection type	Cable/ Pin-type
Terminal block	Screw press-connected
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid
Max. tightening torque	2.5N.m
Mounting type	Mounting on 35mm DIN rail
Incoming method	Bi-Directional
Auxiliary for remote tripping or signaling	
Auxiliary Contact	Yes
Auxiliary & Alarm Contact	Yes
Shunt Release	Yes
Shunt Release & Auxiliary Contact	Yes
Voltage Loss Release	Yes
Over-voltage Release	Yes
Undervoltage Release	Yes
Over-undervoltage Release	Yes
Mechanical Interlock	Yes

## Tripping Characteristic


Data acc. to IEC/EN 60898-1											
Curve	Rated current	Thermal release						Magnetic release			
		Non-trip	Trip	Non-trip time	Trip time	Ambient temperature	Hold current	Trip current	Trip time	Ambient temperature	
B	1-63A	1.13In		≤1h		30°C+5°C	3In		≥0.1	Normal temperature	
			1.45In		<1h			5In	<0.1		
C	1-63A	1.13In		≤1h			5In		≥0.1		
			1.45In		<1h			10In	<0.1		
D	1-63A	1.13In		≤1h			10In		≥0.1		
			1.45In		<1h			20In	<0.1		

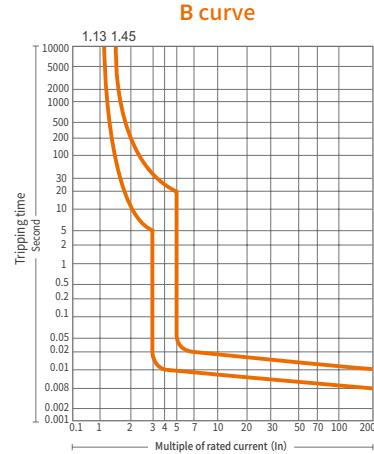

Universal use  
- socket outlet, lighting device

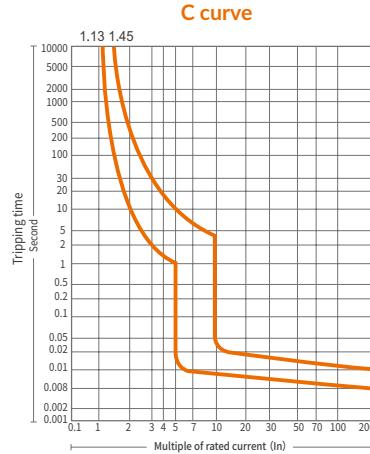

Resistive & inductive loads with  
low inrush current  
- lamp, high starting current motor

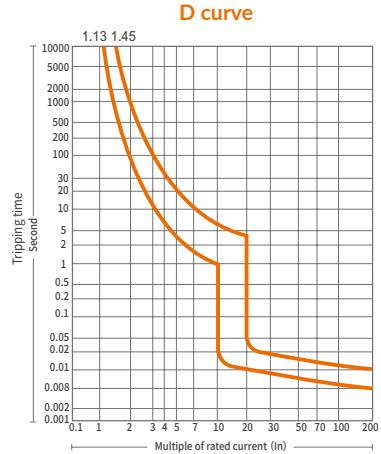


Loads with high inrush current  
- transformer, solenoid valve,  
2 pole motor


## Temperature Derating Table

Rated current (A)	Correction factor for ambient temperature											
	-40°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
1	1.33	1.29	1.25	1.2	1.15	1.11	1.05	1	0.94	0.88	0.82	0.75
2	2.67	2.58	2.49	2.4	2.31	2.21	2.11	2	1.89	1.76	1.63	1.49
3	4	3.9	3.7	3.6	3.5	3.3	3.2	3	2.8	2.6	2.4	2.2
4	5.3	5.2	5	4.8	4.6	4.4	4.2	4	3.8	3.5	3.3	3
5	6.7	6.5	6.31	6.1	5.8	5.5	5.25	5	4.7	4.3	4	3.7
6	8	7.7	7.5	7.2	6.9	6.6	6.3	6	5.7	5.3	4.9	4.5
10	13.3	12.9	12.5	12	11.5	11.1	10.5	10	9.4	8.8	8.2	7.5
16	21.3	20.7	20	19.2	18.5	17.7	16.9	16	15.1	14.1	13.1	11.9
20	26.7	25.8	24.9	24	23.1	22.1	21.1	20	18.9	17.6	16.3	14.9
25	33.3	32.3	31.2	30	28.9	27.6	26.4	25	23.6	22	20.4	18.6
32	42.7	41.3	39.9	38.5	37	35.4	33.7	32	30.2	28.2	26.1	23.9
40	53.3	51.6	49.9	48.1	46.2	44.2	42.2	40	37.7	35.3	32.7	29.8
50	66.7	64.5	62.4	60.1	57.7	55.3	52.7	50	47.1	44.1	40.8	37.3
63	84	81.3	78.6	75.7	72.7	69.6	66.4	63	59.4	55.6	51.4	47

## Wiring Diagram

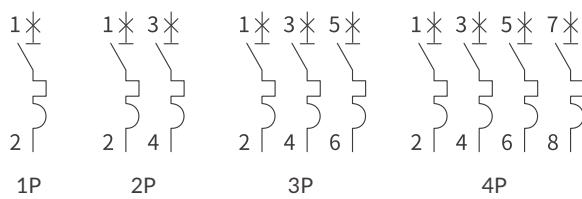

## Dimension (mm)

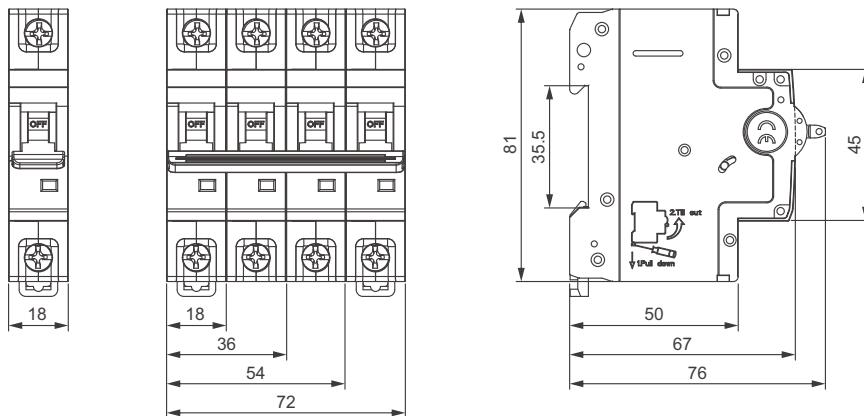

# ETM1-63X

Mini Circuit Breaker



#### IP20 protection

Finger protected connection terminals.

#### Modular accessory expansion

Suitable for the quick and easy mounting of additional components, such as auxiliary switches and fault signal contacts.

#### EAN code

The shell comes with pad printed EAN code.

#### Standard

IEC 60898-1: Electrical accessories - Circuit-breakers for overcurrent protection for household and similar installations - Part 1.

#### Multiple termination

Both incoming and outgoing terminals are suitable for: normal cable, pin type busbars.

#### Contact position indication

Reliable recognition of the switching status through red/green position indicating device.

#### RoHS compliant

ETEK uses environmentally friendly state-of-the-art housing material. With the latest generation of halogen free thermoplastics for MCBs, it is now possible to recycle the MCBs completely which reduces environmental pollution. T Series entire range of circuit protection devices conform to RoHS Standards.

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment



Electrical safety assurance in public facilities

## ■ Overview

ETM1-63X Series Miniature Circuit Breaker is specifically designed for terminal power distribution protection in commercial office buildings, residential premises, and general industrial applications. It is suitable for circuits with AC 50/60Hz, a rated voltage of 110/240/415V, and a rated current up to 63A.

Featuring overload and short-circuit protection, it can also be used for infrequent line switching operations under normal conditions. With a rated short-circuit capacity (Icn) of up to 6kA, it ensures reliable circuit protection.

This product incorporates finger-safe combination terminals and provides contact open/close status indication, significantly enhancing operational safety. Additionally, various modular accessories can be configured to meet diverse application needs.

## ■ Product Tips




- ① Reversible line and load connection
- ② EAN-13 barcodes
- ③ The position of handle lock
- ④ Rated current up to 63A
- ⑤ Contacts position indication window
- ⑥ Rated short circuit breaking capacity 6kA

## Technical Data


General data	
Protection	Overcurrent and short circuit
Type of trip	Thermal-magnetic
No. of poles	1P, 2P, 3P, 4P
Rated operational voltage (Ue)	1P: 110/230V, 120/240V, 230/400V, 240/415V 2P,3P,4P: 230/400V, 240/415V, 400/415V
Rated current (In)	1, 2, 3, 4, 5, 6, 8, 10, 13, 16, 20, 25, 32, 40, 50, 63A
Rated frequency	50/60Hz
Rated insulation voltage (Ui)	500V
Rated impulse withstand voltage (Uimp) (1.2/50μs)	6kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960±15°C (Enclosure); 650±10°C (Handle)
Pollution degree	2
Data acc. to IEC/EN 60898-1	
Rated short-circuit capacity (Icn)	6kA
Rated service short-circuit breaking capacity (Ics)	6kA
Energy limiting class	3
Thermal tripping characteristics	1.13×In No tripping within an hour; 1.45×In Tripping within an hour
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In; D: 10In-20In
Mechanical data	
Electrical life	4,000 Cycles
Mechanical life	20,000 Cycles
Contact position indication	green OFF / red ON
Protection degree	IP20
Reference temperature	30°C
Operating ambient temperature (with daily average≤35°C)	-25°C ~ +55°C
Storage temperature	-30°C ~ +70°C
Installation	
Terminal connection type	Cable/ Pin-type
Terminal block	Screw press-connected
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid
Max. tightening torque	2.5N.m
Mounting type	Mounting on 35mm DIN rail
Incoming method	Bi-Directional
Auxiliary for remote tripping or signaling	
Auxiliary Contact	Yes
Auxiliary & Alarm Contact	Yes
Shunt Release	Yes
Shunt Release & Auxiliary Contact	Yes
Voltage Loss Release	Yes
Over-voltage Release	Yes
Undervoltage Release	Yes
Over-undervoltage Release	Yes
Mechanical Interlock	Yes

## ■ Tripping Characteristic


Data acc. to IEC/EN 60898-1											
Curve	Rated current	Thermal release						Magnetic release			
		Non-trip	Trip	Non-trip time	Trip time	Ambient temperature	Hold current	Trip current	Trip time	Ambient temperature	
B	1-63A	1.13In		≤1h		30°C+5°C	3In		≥0.1	Normal temperature	
			1.45In		<1h			5In	<0.1		
C	1-63A	1.13In		≤1h			5In		≥0.1		
			1.45In		<1h			10In	<0.1		
D	1-63A	1.13In		≤1h			10In		≥0.1		
			1.45In		<1h			20In	<0.1		

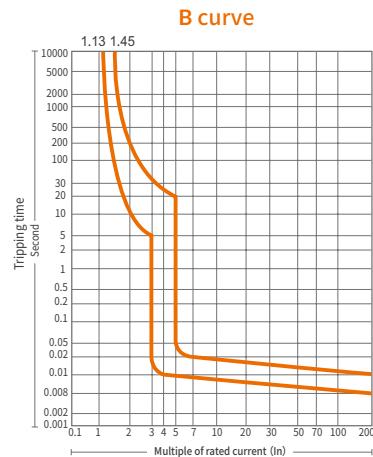

Universal use  
- socket outlet, lighting device

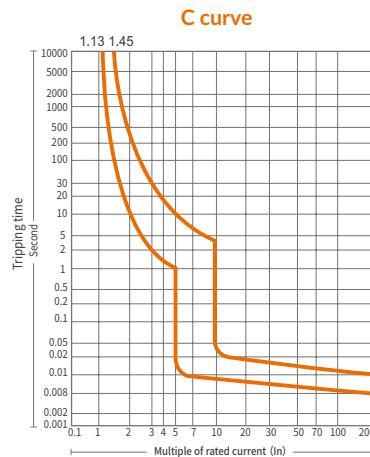

Resistive & inductive loads with  
low inrush current  
- lamp, high starting current motor

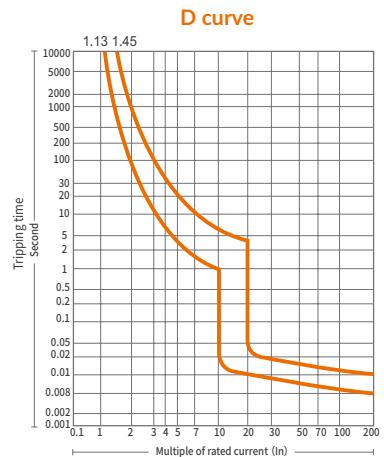


Loads with high inrush current  
- transformer, solenoid valve,  
2 pole motor


## ■ Temperature Derating Table

Rated current (A)	Correction factor for ambient temperature											
	-40°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
1	1.33	1.29	1.25	1.2	1.15	1.11	1.05	1	0.94	0.88	0.82	0.75
2	2.67	2.58	2.49	2.4	2.31	2.21	2.11	2	1.89	1.76	1.63	1.49
3	4	3.9	3.7	3.6	3.5	3.3	3.2	3	2.8	2.6	2.4	2.2
4	5.3	5.2	5	4.8	4.6	4.4	4.2	4	3.8	3.5	3.3	3
5	6.7	6.5	6.31	6.1	5.8	5.5	5.25	5	4.7	4.3	4	3.7
6	8	7.7	7.5	7.2	6.9	6.6	6.3	6	5.7	5.3	4.9	4.5
10	13.3	12.9	12.5	12	11.5	11.1	10.5	10	9.4	8.8	8.2	7.5
16	21.3	20.7	20	19.2	18.5	17.7	16.9	16	15.1	14.1	13.1	11.9
20	26.7	25.8	24.9	24	23.1	22.1	21.1	20	18.9	17.6	16.3	14.9
25	33.3	32.3	31.2	30	28.9	27.6	26.4	25	23.6	22	20.4	18.6
32	42.7	41.3	39.9	38.5	37	35.4	33.7	32	30.2	28.2	26.1	23.9
40	53.3	51.6	49.9	48.1	46.2	44.2	42.2	40	37.7	35.3	32.7	29.8
50	66.7	64.5	62.4	60.1	57.7	55.3	52.7	50	47.1	44.1	40.8	37.3
63	84	81.3	78.6	75.7	72.7	69.6	66.4	63	59.4	55.6	51.4	47

## Wiring Diagram

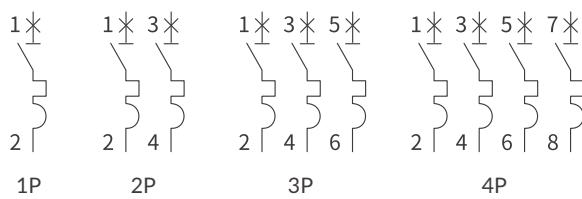

## Dimension (mm)

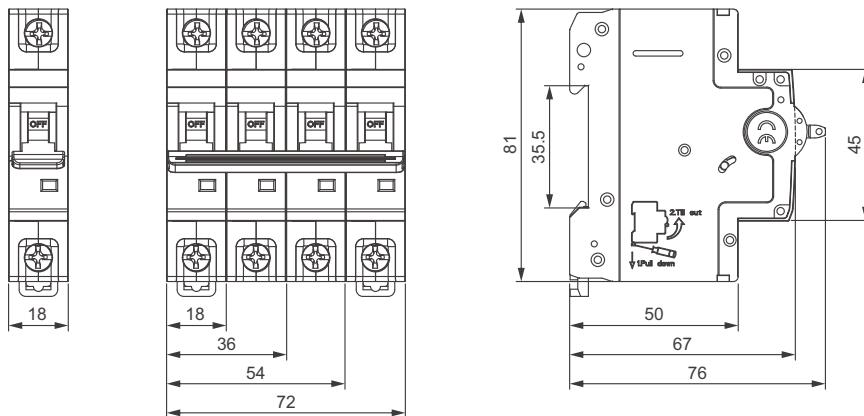

# ETM1-63

Mini Circuit Breaker



## IP20 protection

Finger protected connection terminals.

## Modular accessory expansion

Suitable for the quick and easy mounting of additional components, such as auxiliary switches and fault signal contacts.

## EAN code

The shell comes with pad printed EAN code.

## Standard

IEC 60898-1: Electrical accessories - Circuit-breakers for overcurrent protection for household and similar installations - Part 1.  
IEC 60947-2: Low-voltage switchgear and controlgear -Part 2.

## Multiple termination

Both incoming and outgoing terminals are suitable for: normal cable, fork type busbar, pin type busbars, fork busbar + cable simultaneous connection.

## Contact position indication

Reliable recognition of the switching status through red/green position indicating device.

## RoHS compliant

ETEK uses environmentally friendly state-of-the-art housing material. With the latest generation of halogen free thermoplastics for MCBs, it is now possible to recycle the MCBs completely which reduces environmental pollution. T Series entire range of circuit protection devices conform to RoHS Standards.

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment



Electrical safety assurance in public facilities

## ■ Overview

ETM1-63 Series Miniature Circuit Breaker is specifically designed for terminal power distribution protection in commercial office buildings, residential premises, and general industrial applications. It is suitable for circuits with AC 50/60Hz, a rated voltage of 110/240/415V, and a rated current up to 63A.

Featuring overload and short-circuit protection, it can also be used for infrequent line switching operations under normal conditions. With a maximum ultimate short-circuit breaking capacity (Icu) of up to 6kA, it ensures reliable circuit protection.

This product incorporates finger-safe combination terminals and provides contact open/close status indication, significantly enhancing operational safety. Additionally, various modular accessories can be configured to meet diverse application needs.

## ■ Product Tips




- ① Reversible line and load connection
- ② EAN-13 barcodes
- ③ The position of handle lock
- ④ Rated current up to 63A
- ⑤ PIN/ Fork busbar
- ⑥ Contacts position indication window

## Technical Data


General data	
Protection	Overcurrent and short circuit
Type of trip	Thermal-magnetic
No. of poles	1P, 2P, 3P, 4P
Rated operational voltage (Ue)	1P: 110/230V, 120/240V, 230/240V, 240/415V 2P,3P,4P: 230/400V, 240/415V, 400/415V
Rated current (In)	1, 2, 3, 4, 5, 6, 8, 10, 13, 16, 20, 25, 32, 40, 50, 63A
Rated frequency	50/60Hz
Rated insulation voltage (Ui)	415V
Rated impulse withstand voltage (Ui <sub>imp</sub> ) (1.2/50μs)	6kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960±15°C (Enclosure); 650±10°C (Handle)
Pollution degree	2
Data acc. to IEC/EN 60898-1	
Rated short-circuit capacity (Icn)	6kA
Rated service short-circuit breaking capacity (Ics)	6kA
Energy limiting class	3
Thermal tripping characteristics	1.13×In No tripping within an hour; 1.45×In Tripping within an hour
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In; D: 10In-20In
Data acc. to IEC/EN 60947-2	
Rated ultimate short circuit breaking capacity Icu (kA)	6kA
Rated service short circuit breaking capacity Ics (kA)	6kA
Thermal tripping characteristics	1.05×In No tripping within an hour; 1.3×In Tripping within an hour
Instantaneous tripping characteristics	8In-12In
Mechanical data	
Electrical life	4,000 Cycles
Mechanical life	20,000 Cycles
Contact position indication	green OFF / red ON
Protection degree	IP20
Reference temperature	30°C
Operating ambient temperature (with daily average≤35°C)	-25°C ~ +55°C
Storage temperature	-30°C ~ +70°C
Installation	
Terminal connection type	Cable/ Pin-type/ Fork-type busbar
Terminal block	Screw press-connected
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid
Max. tightening torque	2.5N.m
Mounting type	Mounting on 35mm DIN rail
Incoming method	Bi-Directional
Auxiliary for remote tripping or signaling	
Auxiliary Contact	Yes
Auxiliary & Alarm Contact	Yes
Shunt Release	Yes
Shunt Release & Auxiliary Contact	Yes
Voltage Loss Release	Yes
Over-voltage Release	Yes
Undervoltage Release	Yes
Over-undervoltage Release	Yes
Mechanical Interlock	Yes

## Tripping Characteristic


Data acc. to IEC/EN 60898-1										
Curve	Rated current	Thermal release					Magnetic release			
		Non-trip	Trip	Non-trip time	Trip time	Ambient temperature	Hold current	Trip current	Trip time	Ambient temperature
B	1-63A	1.13In		≤1h		30°C+5°C	3In		≥0.1	Normal temperature
			1.45In		<1h			5In	<0.1	
C	1-63A	1.13In		≤1h			5In		≥0.1	
			1.45In		<1h			10In	<0.1	
D	1-63A	1.13In		≤1h			10In		≥0.1	
			1.45In		<1h			20In	<0.1	

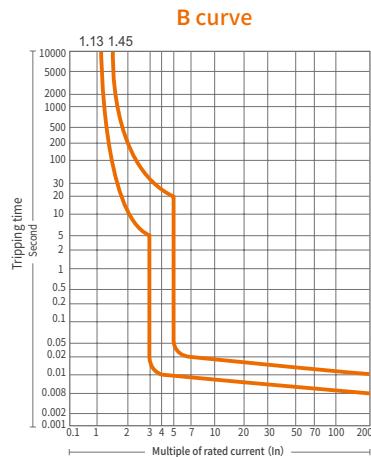

Universal use  
- socket outlet, lighting device

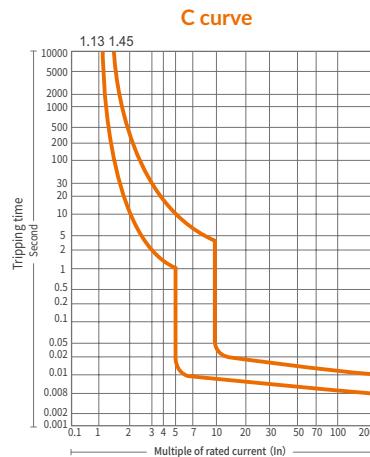


Resistive & inductive loads with low inrush current  
- lamp, high starting current motor

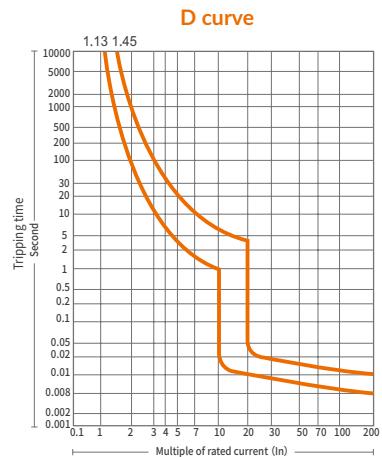

Loads with high inrush current  
- transformer, solenoid valve, 2 pole motor


Data acc. to IEC/EN 60947-2						
Rated current (In)	Tripping Characteristic	Initial state	Test current (A)	Trip time (t)	Result to be obtained	Ambient temperature
≤63A	Thermal release	Cold state	1.05In	≥1h	No trip	30±2°C
		Hot state (Follow the above test)	1.30In	<1h	Trip	
	Magnetic release	Cold state	8In	≤0.2s	No trip	Normal temperature
			12In	<0.2s	Trip	

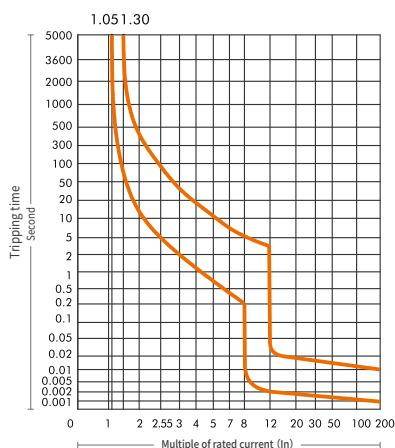


## Temperature Derating Table

Rated current (A)	Correction factor for ambient temperature											
	-40°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
1	1.33	1.29	1.25	1.2	1.15	1.11	1.05	1	0.94	0.88	0.82	0.75
2	2.67	2.58	2.49	2.4	2.31	2.21	2.11	2	1.89	1.76	1.63	1.49
3	4	3.9	3.7	3.6	3.5	3.3	3.2	3	2.8	2.6	2.4	2.2
4	5.3	5.2	5	4.8	4.6	4.4	4.2	4	3.8	3.5	3.3	3
5	6.7	6.5	6.31	6.1	5.8	5.5	5.25	5	4.7	4.3	4	3.7
6	8	7.7	7.5	7.2	6.9	6.6	6.3	6	5.7	5.3	4.9	4.5
10	13.3	12.9	12.5	12	11.5	11.1	10.5	10	9.4	8.8	8.2	7.5
16	21.3	20.7	20	19.2	18.5	17.7	16.9	16	15.1	14.1	13.1	11.9
20	26.7	25.8	24.9	24	23.1	22.1	21.1	20	18.9	17.6	16.3	14.9
25	33.3	32.3	31.2	30	28.9	27.6	26.4	25	23.6	22	20.4	18.6
32	42.7	41.3	39.9	38.5	37	35.4	33.7	32	30.2	28.2	26.1	23.9
40	53.3	51.6	49.9	48.1	46.2	44.2	42.2	40	37.7	35.3	32.7	29.8
50	66.7	64.5	62.4	60.1	57.7	55.3	52.7	50	47.1	44.1	40.8	37.3
63	84	81.3	78.6	75.7	72.7	69.6	66.4	63	59.4	55.6	51.4	47

## Wiring Diagram

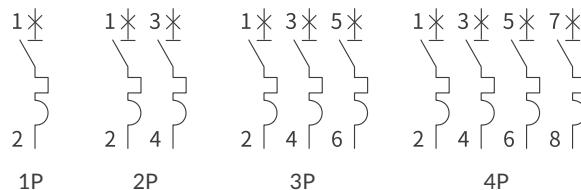

## Dimension (mm)

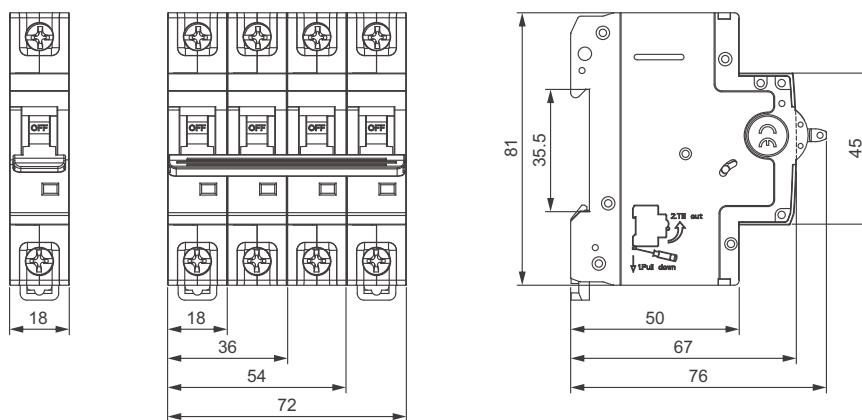

# ETM1-63H

Mini Circuit Breaker



#### IP20 protection

Finger protected connection terminals.

#### Modular accessory expansion

Suitable for the quick and easy mounting of additional components, such as auxiliary switches and fault signal contacts.

#### EAN code

The shell comes with pad printed EAN code.

#### Standard

IEC 60898-1: Electrical accessories - Circuit-breakers for overcurrent protection for household and similar installations - Part 1.  
IEC 60947-2: Low-voltage switchgear and controlgear -Part 2.

#### Multiple termination

Both incoming and outgoing terminals are suitable for: normal cable, fork type busbar, pin type busbars, fork busbar + cable simultaneous connection.

#### Contact position indication

Reliable recognition of the switching status through red/green position indicating device.

#### RoHS compliant

ETEK uses environmentally friendly state-of-the-art housing material. With the latest generation of halogen free thermoplastics for MCBs, it is now possible to recycle the MCBs completely which reduces environmental pollution. T Series entire range of circuit protection devices conform to RoHS Standards.

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment



Electrical safety assurance in public facilities

## ■ Overview

ETM1-63H Series Miniature Circuit Breaker is specifically designed for terminal power distribution protection in commercial office buildings, residential premises, and general industrial applications. It is suitable for circuits with AC 50/60Hz, a rated voltage of 110/240/415V, and a rated current up to 63A.

Featuring overload and short-circuit protection, it can also be used for infrequent line switching operations under normal conditions. With a maximum ultimate short-circuit breaking capacity (Icu) of up to 10kA, it ensures reliable circuit protection.

This product incorporates finger-safe combination terminals and provides contact open/close status indication, significantly enhancing operational safety. Additionally, various modular accessories can be configured to meet diverse application needs.

## ■ Product Tips




- ① Reversible line and load connection
- ② EAN-13 barcodes
- ③ The position of handle lock
- ④ Rated current up to 63A
- ⑤ PIN/ Fork busbar
- ⑥ Contacts position indication window

## Technical Data


General data	
Protection	Overcurrent and short circuit
Type of trip	Thermal-magnetic
No. of poles	1P, 2P, 3P, 4P
Rated operational voltage (Ue)	1P: 110/230V, 120/240V, 230/240V, 240/415V 2P,3P,4P: 230/400V, 240/415V, 400/415V
Rated current (In)	1, 2, 3, 4, 5, 6, 8, 10, 13, 16, 20, 25, 32, 40, 50, 63A
Rated frequency	50/60Hz
Rated insulation voltage (Ui)	415V
Rated impulse withstand voltage (Ui <sub>imp</sub> ) (1.2/50μs)	6kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960±15°C (Enclosure); 650±10°C (Handle)
Pollution degree	2
Data acc. to IEC/EN 60898-1	
Rated short-circuit capacity (Icn)	10kA
Rated service short-circuit breaking capacity (Ics)	7.5kA
Energy limiting class	3
Thermal tripping characteristics	1.13×In No tripping within an hour; 1.45×In Tripping within an hour
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In; D: 10In-20In
Data acc. to IEC/EN 60947-2	
Rated ultimate short circuit breaking capacity Icu (kA)	10kA
Rated service short circuit breaking capacity Ics (kA)	7.5kA
Thermal tripping characteristics	1.05×In No tripping within an hour; 1.3×In Tripping within an hour
Instantaneous tripping characteristics	8In-12In
Mechanical data	
Electrical life	4,000 Cycles
Mechanical life	20,000 Cycles
Contact position indication	green OFF / red ON
Protection degree	IP20
Reference temperature	30°C
Operating ambient temperature (with daily average≤35°C)	-25°C ~ +55°C
Storage temperature	-30°C ~ +70°C
Installation	
Terminal connection type	Cable/ Pin-type/ Fork-type busbar
Terminal block	Screw press-connected
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid
Max. tightening torque	2.5N.m
Mounting type	Mounting on 35mm DIN rail
Incoming method	Bi-Directional
Auxiliary for remote tripping or signaling	
Auxiliary Contact	Yes
Auxiliary & Alarm Contact	Yes
Shunt Release	Yes
Shunt Release & Auxiliary Contact	Yes
Voltage Loss Release	Yes
Over-voltage Release	Yes
Undervoltage Release	Yes
Over-undervoltage Release	Yes
Mechanical Interlock	Yes

## ■ Tripping Characteristic


Data acc. to IEC/EN 60898-1										
Curve	Rated current	Thermal release					Magnetic release			
		Non-trip	Trip	Non-trip time	Trip time	Ambient temperature	Hold current	Trip current	Trip time	Ambient temperature
B	1-63A	1.13In		≤1h		30°C+5°C	3In		≥0.1	Normal temperature
			1.45In		<1h			5In	<0.1	
C	1-63A	1.13In		≤1h			5In		≥0.1	
			1.45In		<1h			10In	<0.1	
D	1-63A	1.13In		≤1h			10In		≥0.1	
			1.45In		<1h			20In	<0.1	

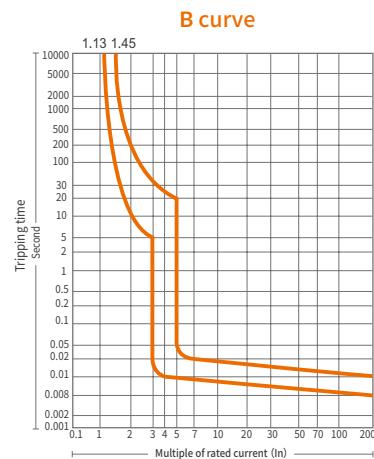

Universal use  
- socket outlet, lighting device

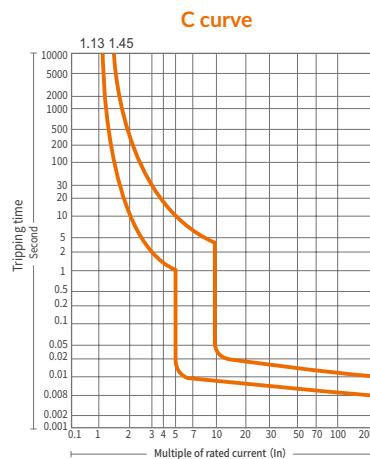


Resistive & inductive loads with low inrush current  
- lamp, high starting current motor

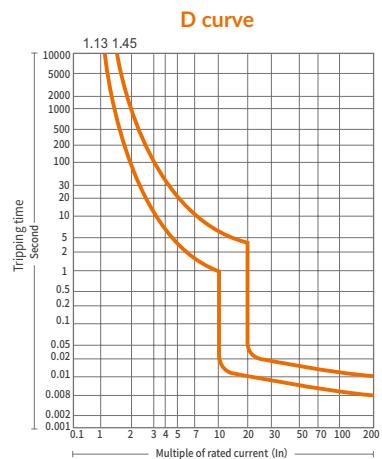

Loads with high inrush current  
- transformer, solenoid valve, 2 pole motor


Data acc. to IEC/EN 60947-2						
Rated current (In)	Tripping Characteristic	Initial state	Test current (A)	Trip time (t)	Result to be obtained	Ambient temperature
≤63A	Thermal release	Cold state	1.05In	≥1h	No trip	30±2°C
		Hot state (Follow the above test)	1.30In	<1h	Trip	
	Magnetic release	Cold state	8In	≤0.2s	No trip	Normal temperature
			12In	<0.2s	Trip	

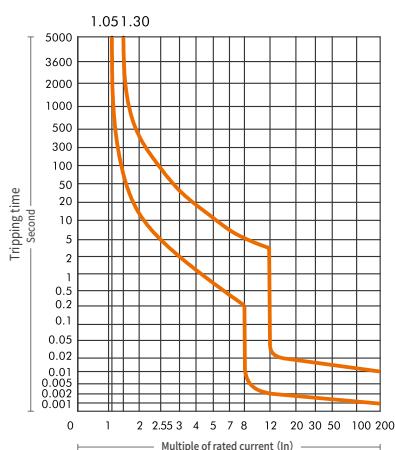


## Temperature Derating Table

Rated current (A)	Correction factor for ambient temperature											
	-40°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
1	1.33	1.29	1.25	1.2	1.15	1.11	1.05	1	0.94	0.88	0.82	0.75
2	2.67	2.58	2.49	2.4	2.31	2.21	2.11	2	1.89	1.76	1.63	1.49
3	4	3.9	3.7	3.6	3.5	3.3	3.2	3	2.8	2.6	2.4	2.2
4	5.3	5.2	5	4.8	4.6	4.4	4.2	4	3.8	3.5	3.3	3
5	6.7	6.5	6.31	6.1	5.8	5.5	5.25	5	4.7	4.3	4	3.7
6	8	7.7	7.5	7.2	6.9	6.6	6.3	6	5.7	5.3	4.9	4.5
10	13.3	12.9	12.5	12	11.5	11.1	10.5	10	9.4	8.8	8.2	7.5
16	21.3	20.7	20	19.2	18.5	17.7	16.9	16	15.1	14.1	13.1	11.9
20	26.7	25.8	24.9	24	23.1	22.1	21.1	20	18.9	17.6	16.3	14.9
25	33.3	32.3	31.2	30	28.9	27.6	26.4	25	23.6	22	20.4	18.6
32	42.7	41.3	39.9	38.5	37	35.4	33.7	32	30.2	28.2	26.1	23.9
40	53.3	51.6	49.9	48.1	46.2	44.2	42.2	40	37.7	35.3	32.7	29.8
50	66.7	64.5	62.4	60.1	57.7	55.3	52.7	50	47.1	44.1	40.8	37.3
63	84	81.3	78.6	75.7	72.7	69.6	66.4	63	59.4	55.6	51.4	47

## Wiring Diagram

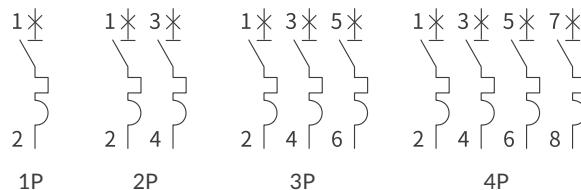

## Dimension (mm)

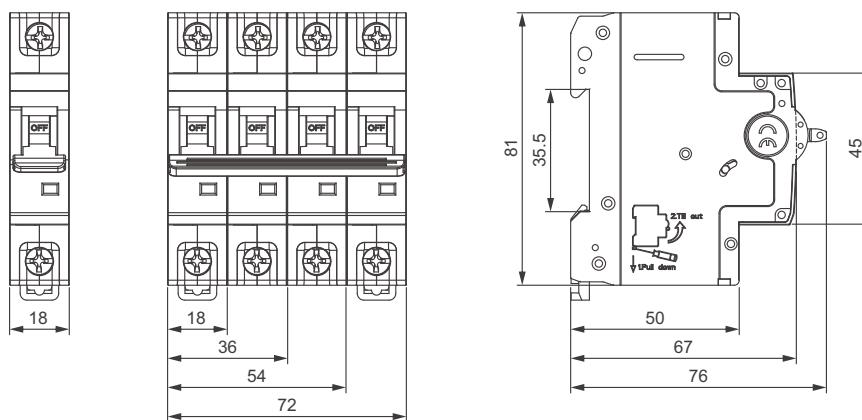

# ETM1-63UH

Mini Circuit Breaker



#### IP20 protection

Finger protected connection terminals.

#### Modular accessory expansion

Suitable for the quick and easy mounting of additional components, such as auxiliary switches and fault signal contacts.

#### EAN code

The shell comes with pad printed EAN code.

#### Standard

IEC 60947-2: Low-voltage switchgear and controlgear -Part 2.

#### Multiple termination

Both incoming and outgoing terminals are suitable for: normal cable, fork type busbar, pin type busbars, fork busbar + cable simultaneous connection.

#### Contact position indication

Reliable recognition of the switching status through red/green position indicating device.

#### RoHS compliant

ETEK uses environmentally friendly state-of-the-art housing material. With the latest generation of halogen free thermoplastics for MCBs, it is now possible to recycle the MCBs completely which reduces environmental pollution. T Series entire range of circuit protection devices conform to RoHS Standards.

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment



Electrical safety assurance in public facilities

## ■ Overview

ETM1-63UH Series Miniature Circuit Breaker is specifically designed for terminal power distribution protection in commercial office buildings, residential premises, and general industrial applications. It is suitable for circuits with AC 50/60Hz, a rated voltage of 110/240/415V, and a rated current up to 63A.

Featuring overload and short-circuit protection, it can also be used for infrequent line switching operations under normal conditions. With a maximum ultimate short-circuit breaking capacity (Icu) of up to 15kA, it ensures reliable circuit protection.

This product incorporates finger-safe combination terminals and provides contact open/close status indication, significantly enhancing operational safety. Additionally, various modular accessories can be configured to meet diverse application needs.

## ■ Product Tips




- ① Reversible line and load connection
- ② EAN-13 barcodes
- ③ The position of handle lock
- ④ Rated current up to 63A
- ⑤ PIN/ Fork busbar
- ⑥ Contacts position indication window

## Technical Data

General data	
Protection	Overcurrent and short circuit
Type of trip	Thermal-magnetic
No. of poles	1P, 2P, 3P, 4P
Rated operational voltage (Ue)	1P: 110/230V, 120/240V, 230/400V, 240/415V 2P,3P,4P: 230/400V, 240/415V, 400/415V
Rated current (In)	1, 2, 3, 4, 5, 6, 8, 10, 13, 16, 20, 25, 32, 40, 50, 63A
Rated frequency	50/60Hz
Rated insulation voltage (Ui)	415V
Rated impulse withstand voltage (Uimp) (1.2/50μs)	6kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960±15°C (Enclosure); 650±10°C (Handle)
Pollution degree	2
Data acc. to IEC/EN 60947-2	
Rated ultimate short circuit breaking capacity Icu (kA)	15kA
Rated service short circuit breaking capacity Ics (kA)	7.5kA
Thermal tripping characteristics	1.05×In No tripping within an hour; 1.3×In Tripping within an hour
Instantaneous tripping characteristics	8In-12In
Mechanical data	
Electrical life	4,000 Cycles
Mechanical life	20,000 Cycles
Contact position indication	green OFF / red ON
Protection degree	IP20
Reference temperature	30°C
Operating ambient temperature (with daily average≤35°C)	-25°C ~ +55°C
Storage temperature	-30°C ~ +70°C
Installation	
Terminal connection type	Cable/ Pin-type/ Fork-type busbar
Terminal block	Screw press-connected
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid
Max. tightening torque	2.5N.m
Mounting type	Mounting on 35mm DIN rail
Incoming method	Bi-Directional
Auxiliary for remote tripping or signaling	
Auxiliary Contact	Yes
Auxiliary & Alarm Contact	Yes
Shunt Release	Yes
Shunt Release & Auxiliary Contact	Yes
Voltage Loss Release	Yes
Over-voltage Release	Yes
Undervoltage Release	Yes
Over-undervoltage Release	Yes
Mechanical Interlock	Yes

## ■ Tripping Characteristic


Data acc. to IEC/EN 60947-2						
Rated current (In)	Tripping Characteristic	Initial state	Test current (A)	Trip time (t)	Result to be obtained	Ambient temperature
≤63A	Thermal release	Cold state	1.05In	≥1h	No trip	30±2°C
		Hot state (Follow the above test)	1.30In	<1h	Trip	
	Magnetic release	Cold state	8In	≤0.2s	No trip	Normal temperature
			12In	<0.2s	Trip	

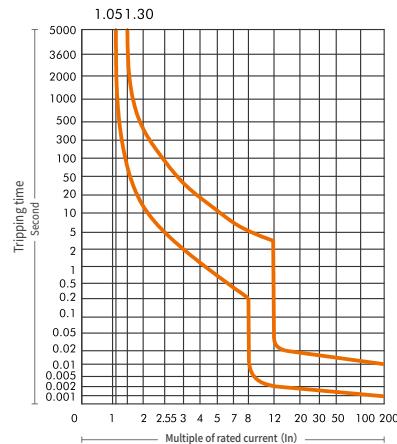


## ■ Temperature Derating Table

Rated current (A)	Correction factor for ambient temperature											
	-40°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
1	1.33	1.29	1.25	1.2	1.15	1.11	1.05	1	0.94	0.88	0.82	0.75
2	2.67	2.58	2.49	2.4	2.31	2.21	2.11	2	1.89	1.76	1.63	1.49
3	4	3.9	3.7	3.6	3.5	3.3	3.2	3	2.8	2.6	2.4	2.2
4	5.3	5.2	5	4.8	4.6	4.4	4.2	4	3.8	3.5	3.3	3
5	6.7	6.5	6.31	6.1	5.8	5.5	5.25	5	4.7	4.3	4	3.7
6	8	7.7	7.5	7.2	6.9	6.6	6.3	6	5.7	5.3	4.9	4.5
10	13.3	12.9	12.5	12	11.5	11.1	10.5	10	9.4	8.8	8.2	7.5
16	21.3	20.7	20	19.2	18.5	17.7	16.9	16	15.1	14.1	13.1	11.9
20	26.7	25.8	24.9	24	23.1	22.1	21.1	20	18.9	17.6	16.3	14.9
25	33.3	32.3	31.2	30	28.9	27.6	26.4	25	23.6	22	20.4	18.6
32	42.7	41.3	39.9	38.5	37	35.4	33.7	32	30.2	28.2	26.1	23.9
40	53.3	51.6	49.9	48.1	46.2	44.2	42.2	40	37.7	35.3	32.7	29.8
50	66.7	64.5	62.4	60.1	57.7	55.3	52.7	50	47.1	44.1	40.8	37.3
63	84	81.3	78.6	75.7	72.7	69.6	66.4	63	59.4	55.6	51.4	47

## Wiring Diagram

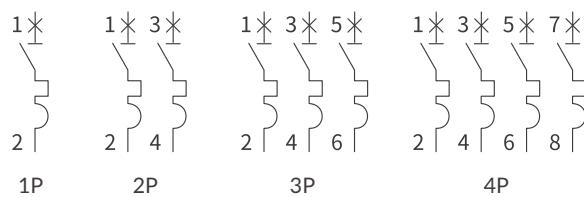

## Dimension (mm)

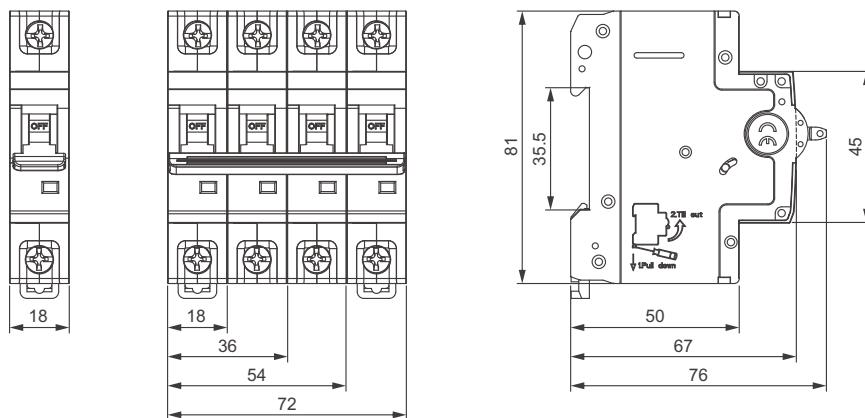

# ETM1-63DC

Non-Polarity DC Mini Circuit Breaker

CE



Standard: IEC/EN 60947-2

Rated current: 6~63A

Poles: 1P, 2P, 3P, 4P

Rated breaking capacity: 6kA

Insulation voltage: 1200V

Incoming method: According to the wiring diagram

Rated operated voltage: 300VDC(1P), 600VDC(2P), 900VDC(3P), 1200VDC(4P)

## Applications



Photovoltaic (PV) Systems



Energy Storage System



Communications and Data Center



Industrial and Automation Equipment

## ■ Overview

EKM1-63DC is a non-polarized DC miniature circuit breaker designed for photovoltaic, energy storage, and other high-voltage DC applications. Supporting 6-63A at up to 1200VDC and available in 1P/2P/3P/4P configurations, its polarity-free design simplifies installation, eliminates wiring errors, and enables fast, efficient field deployment.

With high-voltage capability, dependable arc suppression, and precise tripping, it ensures reliable performance and enhanced safety for modern systems.

## ■ Product Tips



1 Line and load connection

3 Rated current up to 63A


2 The position of handle lock

4 Contacts position indication window


**Technical Data**

Standard	IEC/EN 60947-2						
Protection	Overcurrent and short circuit						
Type of trip	Thermal-magnetic						
No. of poles	1P	2P	3P	4P			
Rated voltage (Ue)	300VDC	600VDC	900VDC	1200VDC			
Rated currents (In)	6, 10, 16, 20, 25, 32, 40, 50, 63A						
Rated insulation voltage (Ui)	1200V						
Rated impulse withstand voltage (Uimp) (1.2/50μs)	6kV						
Rated service short circuit breaking capacity (Ics)	6kA						
Rated ultimate short circuit breaking capacity (Icu)	6kA						
Thermal tripping characteristics	1.05×In No tripping within an hour; 1.3×In Tripping within an hour						
Instantaneous tripping characteristics	B: 4In±20%, C: 8In±20%, K: 10In±20%						
Electrical life	Actual value	>1,000 Cycles					
	Standard value	1,000 Cycles					
Mechanical life	Actual value	>20,000 Cycles					
	Standard value	8500 Cycles					
Contact position indicator	green OFF/ red ON						
Overvoltage category	3						
Pollution degree	3						
Ingress protection	IP40, Wiring port IP20						
Resistance to humidity and heat	Class 2						
Reference temperature	-30°C						
Operating ambient temperature (with daily average≤35°C)	-25°C ~ +55°C						
Ambient temperature	-30°C ~ +70°C						
Terminal connection type	Cable						
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid						
Max. tightening torque	2.5N.m						
Installation	Mounting on 35mm DIN rail						
Incoming method	According to the wiring diagram						


## ■ Tripping Characteristic

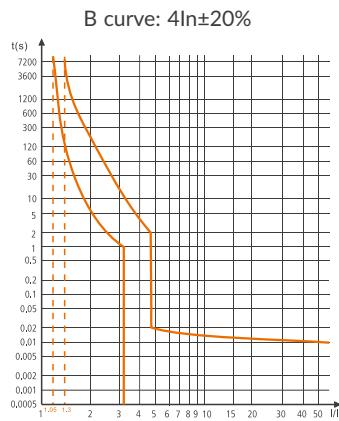

- $I=1.05In, t \geq 1h, \text{not trip}$
- $I=1.3In, t < 1h, \text{trip}$
- $I=2.55In, t \geq 1-120s (In=6-63A)$
- Instantaneous trip:  $4In \pm 20\%$

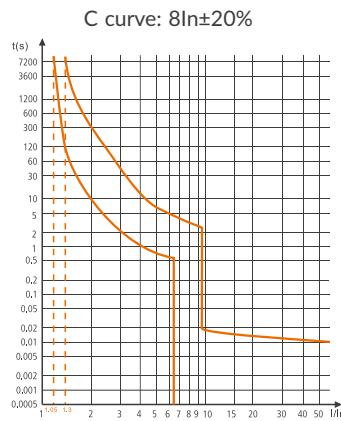

- $I=1.05In, t \geq 1h, \text{not trip}$
- $I=1.3In, t < 1h, \text{trip}$
- $I=2.55In, t \geq 1-120s (In=6-63A)$
- Instantaneous trip:  $8In \pm 20\%$

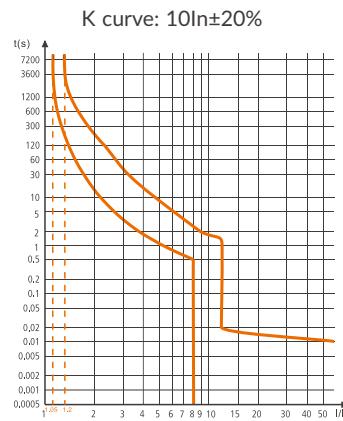

- $I=1.05In, t \geq 1h, \text{not trip}$
- $I=1.3In, t < 1h, \text{trip}$
- $I=2.55In, t \geq 1-120s (In=6-63A)$
- Instantaneous trip:  $10In \pm 20\%$


## ■ Temperature Derating Table

Rated voltage (Ue)	Correction factor for ambient temperature																		
	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	5°C	10°C	15°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C	55°C	60°C
16A	1.24	1.22	1.20	1.18	1.16	1.14	1.11	1.09	1.07	1.05	1.02	1.00	1.00	1.00	1.00	0.90	0.87	0.84	0.81
20A	1.23	1.21	1.19	1.17	1.15	1.13	1.11	1.09	1.07	1.05	1.02	1.00	1.00	1.00	1.00	0.90	0.87	0.84	0.81
25A	1.24	1.22	1.20	1.18	1.16	1.14	1.11	1.09	1.07	1.05	1.02	1.00	1.00	1.00	1.00	0.90	0.87	0.85	0.82
32A	1.23	1.21	1.19	1.17	1.15	1.13	1.11	1.09	1.07	1.04	1.02	1.00	1.00	1.00	1.00	0.91	0.88	0.85	0.78
40A	1.23	1.21	1.19	1.17	1.15	1.13	1.11	1.09	1.07	1.05	1.02	1.00	1.00	1.00	1.00	0.91	0.88	0.85	0.82
50A	1.23	1.21	1.19	1.17	1.15	1.13	1.11	1.09	1.07	1.05	1.02	1.00	1.00	1.00	1.00	0.91	0.88	0.85	0.82
63A	1.27	1.25	1.22	1.17	1.18	1.15	1.13	1.11	1.08	1.05	0.87	1.00	1.00	1.00	1.00	0.88	0.85	0.82	0.78

## ■ Derating of Altitude


Altitude (m)	2000	3000	4000	5000
Rated current (In)	1	0.97	0.91	0.86
Rated insulation (Ui)	1	0.90	0.82	0.76
Power-frequency dielectric strength	1	0.90	0.82	0.76
Rated impact tolerance voltage (Uimp)	1	0.90	0.82	0.76
Values of rated shour-circuit capacity (Icn)	1	0.87	0.77	0.67
Electrical life (Cycles)	1	0.87	0.77	0.67

## Derating of Altitude

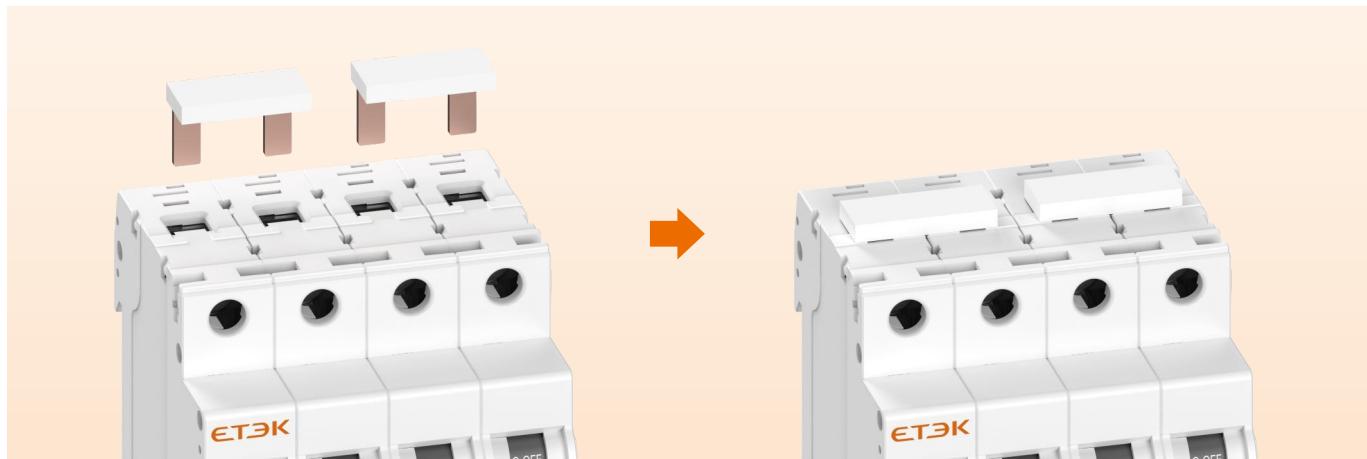


Note: Configure the external bridging busbars as required by the circuit diagram.

## Wiring Diagram

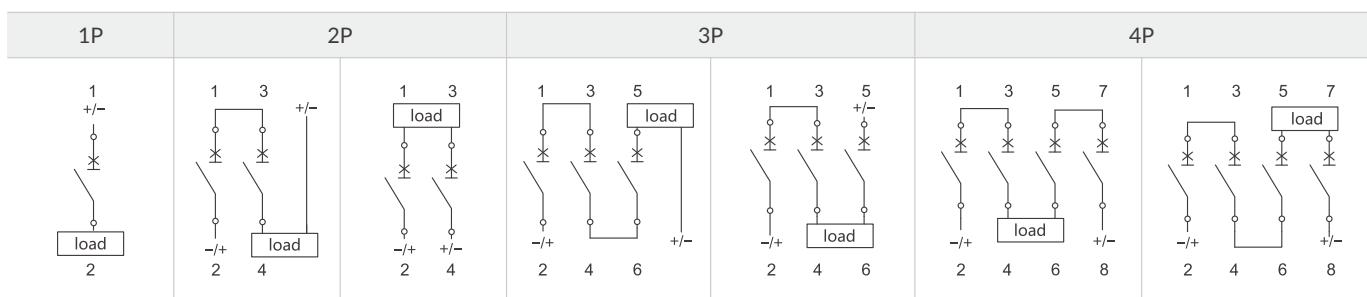

## Dimension (mm)

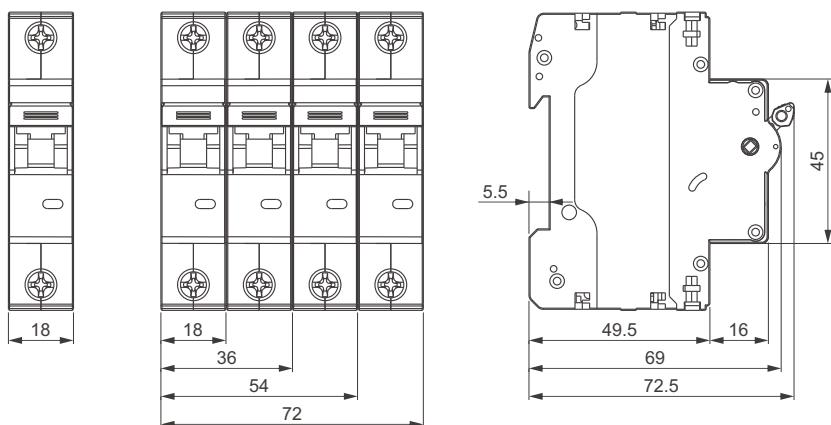

# ETL2-63(H)

Residual Current Circuit Breaker with Overcurrent Protection



**Voltage:** 230/240V AC systems (50/60Hz)

**Electronic type**

**Current range:** 6A to 63A

**From bottom wiring capability**

**Rated residual current:** 10, 30, 100, 300mA

**AC and A types**

**Tripping curves:** Type B/C available

**Transparent trip status observation port**

**Breaking capacity:** 6kA, 10kA

**RCBO according to IEC/EN 61009-1**

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment




Electrical safety assurance in public facilities

## ■ Overview

ETL2-63(H) 1P+N RCBO in 1 module width, suitable for installation in chassis distribution boards. provides comprehensive protection against short-circuits, overloads, and earth faults. This device with a blue neutral cable features a 6kA or 10kA breaking capacity and is available in rated currents up to 63A, making it suitable for residential, commercial, and industrial applications. An optional functional earth cable (white) enhances safety in the event of neutral loss. The neutral is unswitched.

## ■ Product Tips

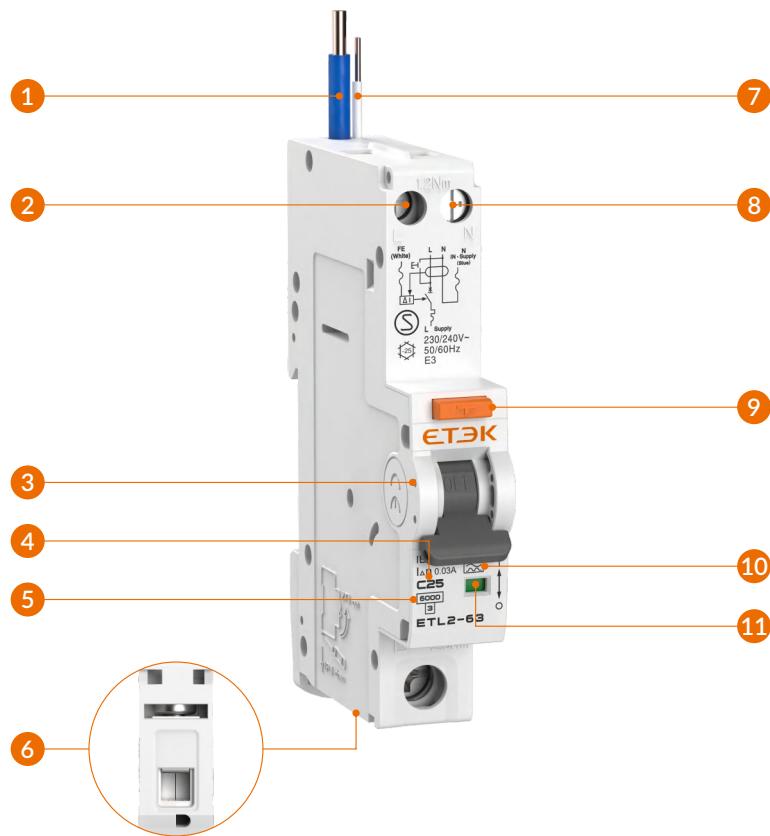

- |                                                   |                                         |
|---------------------------------------------------|-----------------------------------------|
| ① Neutral incoming cable                          | ⑦ Functional earth cable (optional)     |
| ② Live line interface                             | ⑧ Neutral line interface                |
| ③ The position of handle                          | ⑨ Test button                           |
| ④ Lock Tripping characteristics B, C              | ⑩ Sensitivity to residual current AC, A |
| ⑤ Rated short circuit breaking capacity 6kA, 10kA | ⑪ Contacts position indication window   |
| ⑥ PIN/ Fork busbar                                |                                         |

**Technical Data**

Standard	IEC/EN 61009-1
Protection	Ground fault, Overcurrent and short circuit
Type of trip	Ground fault: Electronic
	Overload and short circuit: Thermal-magnetic
Residual current type	AC type - AC residual current
	A type - residual AC and pulsating DC current
No. of poles	1P+N, Neutral line is unswitched
Insulation voltage (Ui)	500V
Rated voltage (Ue)	230/240V~
Rated currents (In)	6, 10, 16, 20, 25, 32, 40, 50, 63A
Rated sensitivity currents (IΔn)	10, 30, 100, 300mA
Residual current off-time under (IΔn)	≤0.1s
Rated residual making and breaking capacity (IΔm)	500A (In≤50A); 10In (In>50A)
Rated frequency	50/60Hz
Rated short-circuit capacity (Icn)	ETL2-63: 6kA; ETL2-63H: 10kA
Energy limiting class	3
Rated impulse withstand voltage (Uimp) (1.2/50μs)	4kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960±15°C (Enclosure); 650±10°C (Handle)
Thermal tripping characteristics	1.13In No tripping within an hour; 1.45In Tripping within an hour
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In
Electrical life	4,000 Cycles
Mechanical life	8,000 Cycles
Contact position indicator	green OFF / red ON
Protection degree	IP20
Ambient temperature	-25°C ~ +55°C
Storage temperature	-30°C ~ +70°C
Terminal connection type	Cable/ Pin-type/ Fork-type busbar
Max. terminal size for cable	Line side (bottom): 25mm <sup>2</sup> ; Load side (top) : 16mm <sup>2</sup> (For 16mm <sup>2</sup> conductors: crimping terminal lug is mandatory.)
Max. tightening torque	Bottom (line side): 2.5N.m; Top (Load side) : 1.2N.m
Neutral load cable	Bule, 500mm length, 4mm <sup>2</sup> (Other lengths available upon request)
Functional earth cable	White, 500mm length, 0.6mm <sup>2</sup> (Other lengths available upon request)
Installation	Mounting on 35mm DIN rail
Incoming method	Bi-Directional

**Auxiliary for remote tripping or signaling**

Auxiliary Contact	Yes
Auxiliary & Alarm Contact	Yes
Shunt Release	Yes
Shunt Release & Auxiliary Contact	Yes
Voltage Loss Release	Yes
Over-voltage Release	Yes
Undervoltage Release	Yes
Over-undervoltage Release	Yes

## ■ RCD Type



Type AC RCDs detect slowly increasing sinusoidal AC residual currents.



Type A RCDs detect AC leakage currents and pulsed DC leakage currents below 6mA.

## ■ Tripping Sensitivity

**10mA**

Provides a higher level of protection for the human body and is used in certain situations with very high requirements for electric shock protection, such as children's facilities, swimming pools, bathrooms and other humid environments.

**30mA**

This is the most commonly used protection level in homes and commercial buildings, and is suitable for socket protection in general residential environments, offices and commercial places.

**100mA**

Usually used in situations where personal protection requirements are not as strict as 30mA, or for equipment protection, such as air conditioning systems, industrial equipment, etc.


**300mA**

Mainly used for fire protection, such as distribution boards and general protection of large electrical equipment.

## ■ Tripping Characteristics


Curve	Rated current	Condition						
		Thermal release				Magnetic release		
		Non-trip	Trip	Non-trip time	Trip time	Hold current	Trip current	Trip time
B	6-63A	1.13×In		≤1h		3×In		≥0.1
			1.45×In		<1h		5×In	<0.1
C	6-63A	1.13×In		≤1h		5×In		≥0.1
			1.45×In		<1h		10×In	<0.1

**B curve**

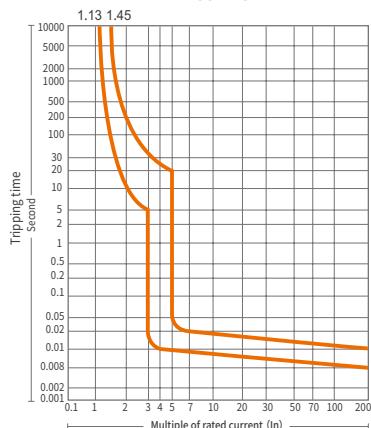

Universal use  
- socket outlet, lighting device

**C curve**

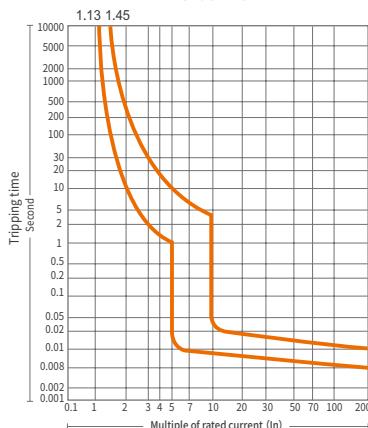

Resistive & inductive loads with  
low inrush current  
- lamp, high starting current motor


## ■ Breaking Time of Residual Current

In(A)	I <sub>Δn</sub> (mA)	Max. breaking time			
		I <sub>Δn</sub>	2I <sub>Δn</sub>	5I <sub>Δn</sub>	5,10,20,50,100,200,500A
6,10,16,20,25,32,40,50,63	10,30, 100, 300	0.1s	0.08s	0.04s	0.04s



## ■ Temperature Derating Table

Rated current (A)	Correction factor for ambient temperature											
	-40°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
6	8	7.7	7.5	7.2	6.9	6.6	6.3	6	5.7	5.3	4.9	4.5
10	13.3	12.9	12.5	12	11.5	11.1	10.5	10	9.4	8.8	8.2	7.5
16	21.3	20.7	20	19.2	18.5	17.7	16.9	16	15.1	14.1	13.1	11.9
20	26.7	25.8	24.9	24	23.1	22.1	21.1	20	18.9	17.6	16.3	14.9
25	33.3	32.3	31.2	30	28.9	27.6	26.4	25	23.6	22	20.4	18.6
32	42.7	41.3	39.9	38.5	37	35.4	33.7	32	30.2	28.2	26.1	23.9
40	53.3	51.6	49.9	48.1	46.2	44.2	42.2	40	37.7	35.3	32.7	29.8
50	66.7	64.5	62.4	60.1	57.7	55.3	52.7	50	47.1	44.1	40.8	37.3
63	84	81.3	78.6	75.7	72.7	69.6	66.4	63	59.4	55.6	51.4	47

## ■ Wiring Diagram



## ■ Dimension (mm)

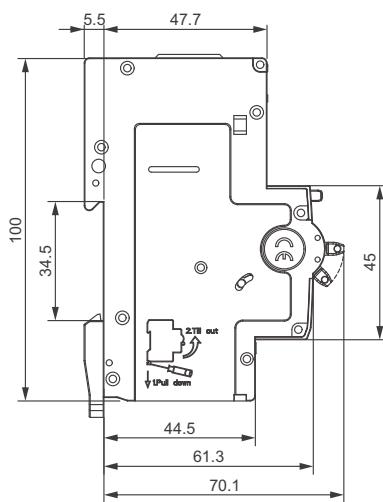

# ETL3-40M(H)

Residual Current Circuit Breaker with Overcurrent Protection



Voltage: 400/415V AC systems (50/60Hz)

Electro-magnetic type

Current range: 6A to 40A

AC and A types

Rated residual current: 30, 100, 300mA

Bidirectional wiring capability

Tripping curves: Type B/C available

Visual leakage fault indication window

Breaking capacity: 6kA/10kA options

Transparent trip status observation port

Protects against overload, short circuit, and leakage faults

RCBO according to IEC/EN 61009-1

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment



Electrical safety assurance in public facilities

## ■ Overview

ETL3-40M Residual Current Circuit Breakers with Overcurrent Protection (RCBO) provide combined protection against overload, short-circuit and earth leakage faults. Designed for 400/415 V (3P+N) power systems with rated currents up to 40A, they are suitable for both residential and industrial installations.

The range offers breaking capacities of 6 kA and 10 kA and is equipped with a reliable electromagnetic trip unit for fast fault clearance.

## ■ Product Tips



- |                                                   |                                         |
|---------------------------------------------------|-----------------------------------------|
| ① PIN/ Fork busbar                                | ⑥ Neutral line interface                |
| ② Live line interface                             | ⑦ Test button                           |
| ③ The position of handle Lock                     | ⑧ Residual current trip indicator       |
| ④ Tripping characteristics B, C                   | ⑨ Sensitivity to residual current AC, A |
| ⑤ Rated short circuit breaking capacity 6kA, 10kA | ⑩ Contacts position indication window   |

**Technical Data**

Standard	IEC/EN 61009-1
Type of trip	Electro-magnetic type
Residual current type	AC type - AC residual current
	A type - residual AC and pulsating DC current
No. of poles	3P+N
Insulation voltage (Ui)	500V
Rated voltage (Ue)	400/415V
Rated currents (In)	6, 10, 16, 20, 25, 32, 40A
Rated sensitivity currents (I <sub>Δn</sub> )	30, 100, 300mA
Residual current off-time under (I <sub>Δn</sub> )	<0.3s
Rated residual making and breaking capacity (I <sub>Δm</sub> )	500A
Rated frequency	50/60Hz
Rated short-circuit capacity (Icn)	ETL3-40M: 6kA
	ETL3-40MH: 10kA
Energy limiting class	3
Rated impulse withstand voltage (Uimp) (1.2/50μs)	4kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960±15°C (Enclosure)
	650±10°C (Handle)
Thermal tripping characteristics	1.13In No tripping within an hour
	1.45In Tripping within an hour
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In
Electrical life	4,000 Cycles
Mechanical life	8,000 Cycles
Contact position indicator	green OFF / red ON
Ground fault indicator	White: Normal
	Blue: Leakage fault
Protection degree	IP20
Ambient temperature	-25°C ~ +55°C
Storage temperature	-30°C ~ +70°C
Terminal connection type	Cable/ Pin-type/ Fork-type busbar
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid
Max. tightening torque	2.5N.m
Installation	Mounting on 35mm DIN rail
Incoming method	Bi-directional

## RCD Type



Type AC RCDs detect slowly increasing sinusoidal AC residual currents.



Type A RCDs detect AC leakage currents and pulsed DC leakage currents below 6mA.

## Tripping Sensitivity

30mA

This is the most commonly used protection level in homes and commercial buildings, and is suitable for socket protection in general residential environments, offices and commercial places.

100mA

Usually used in situations where personal protection requirements are not as strict as 30mA, or for equipment protection, such as air conditioning systems, industrial equipment, etc.


300mA

Mainly used for fire protection, such as distribution boards and general protection of large electrical equipment.

## Tripping Characteristics


Curve	Rated current	Condition						
		Thermal release				Magnetic release		
		Non-trip	Trip	Non-trip time	Trip time	Hold current	Trip current	Trip time
B	6-40A	1.13×In		≤1h		3×In		≥0.1
			1.45×In		<1h		5×In	<0.1
C	6-40A	1.13×In		≤1h		5×In		≥0.1
			1.45×In		<1h		10×In	<0.1

B curve

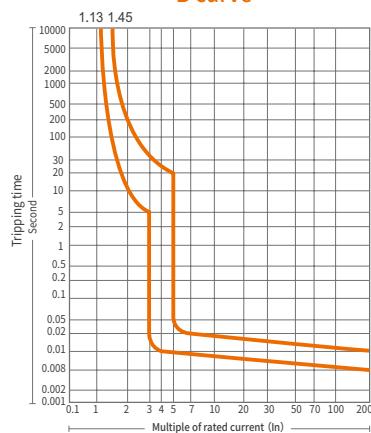

Universal use  
- socket outlet, lighting device

C curve

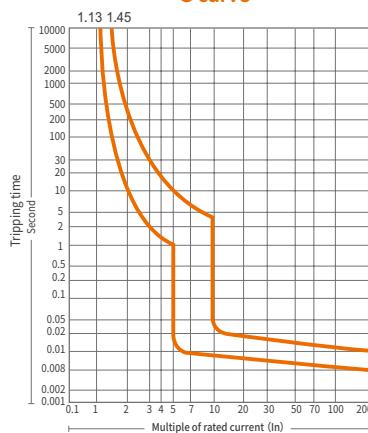

Resistive & inductive loads with  
low inrush current  
- lamp, high starting current motor


## ■ Breaking Time of Residual Current

In(A)	I <sub>Δn</sub> (mA)	Max. breaking time			
		I <sub>Δn</sub>	2I <sub>Δn</sub>	5I <sub>Δn</sub>	5,10,20,50,100,200,500A
6,10,16,20,25,32,40	30, 100, 300	0.3s	0.15s	0.04s	0.04s



## ■ Temperature Derating Table

Rated current (A)	Correction factor for ambient temperature											
	-40°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
6	8	7.7	7.5	7.2	6.9	6.6	6.3	6	5.7	5.3	4.9	4.5
10	13.3	12.9	12.5	12	11.5	11.1	10.5	10	9.4	8.8	8.2	7.5
16	21.3	20.7	20	19.2	18.5	17.7	16.9	16	15.1	14.1	13.1	11.9
20	26.7	25.8	24.9	24	23.1	22.1	21.1	20	18.9	17.6	16.3	14.9
25	33.3	32.3	31.2	30	28.9	27.6	26.4	25	23.6	22	20.4	18.6
32	42.7	41.3	39.9	38.5	37	35.4	33.7	32	30.2	28.2	26.1	23.9
40	53.3	51.6	49.9	48.1	46.2	44.2	42.2	40	37.7	35.3	32.7	29.8

## ■ Wiring Diagram



## ■ Dimension (mm)

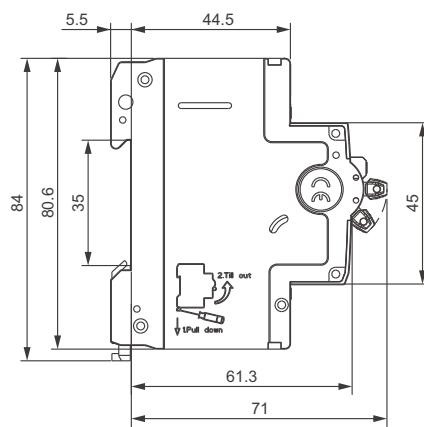

# ETL3-63M(H)

Residual Current Circuit Breaker with Overcurrent Protection



**Voltage:** 240/415V AC systems (50/60Hz)

**Electro-magnetic type**

**Current range:** 6A to 63A

**AC and A types**

**Rated residual current:** 30, 100, 300mA

**Bidirectional wiring capability**

**Tripping curves:** Type B/C available

**Visual leakage fault indication window**

**Breaking capacity:** 6kA/10kA options

**Transparent trip status observation port**

**Protects against:** overload, short circuit, and leakage faults

**RCBO according to IEC/EN 61009-1**

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment




Electrical safety assurance in public facilities

## ■ Overview

ETL3-63M Residual Current Circuit Breaker with Overcurrent Protection (RCBO) provide protects against overload, short circuit, and leakage faults, supporting 230/240V (1P+N) or 400/415V (3P+N) power systems with ratings up to 63A, its reliable operation across residential and industrial applications.

## ■ Product Tips

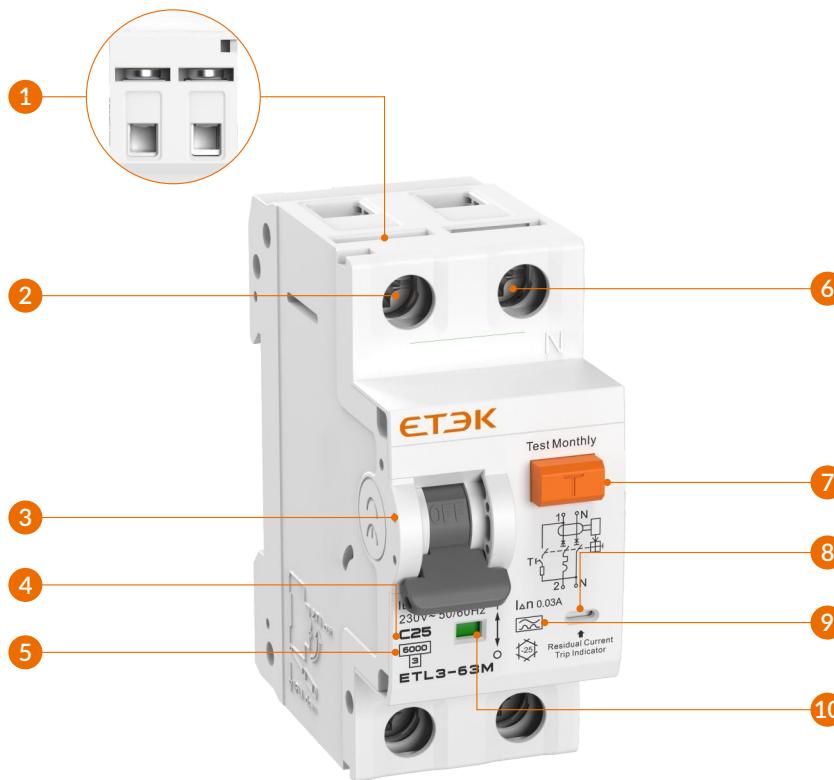

- |                                                   |                                         |
|---------------------------------------------------|-----------------------------------------|
| ① PIN/ Fork busbar                                | ⑥ Neutral line interface                |
| ② Live line interface                             | ⑦ Test button                           |
| ③ The position of handle Lock                     | ⑧ Residual current trip indicator       |
| ④ Tripping characteristics B, C                   | ⑨ Sensitivity to residual current AC, A |
| ⑤ Rated short circuit breaking capacity 6kA, 10kA | ⑩ Contacts position indication window   |

**Technical Data**

Standard	IEC/EN 61009-1
Protection	Ground fault, Overcurrent and short circuit
Type of trip	Electro-magnetic type
Residual current type	AC type - AC residual current A type - residual AC and pulsating DC current
No. of poles	1P+N, 3P+N
Insulation voltage (Ui)	500V
Rated voltage (Ue)	1P+N: 230/240V~; 3P+N: 400/415V~
Rated currents (In)	6, 10, 16, 20, 25, 32, 40, 50, 63A
Rated sensitivity currents (IΔn)	30, 100, 300mA
Residual current off-time under (IΔn)	<0.3s
Rated residual making and breaking capacity (IΔm)	500A (In≤50A) 10In (In>50A)
Rated frequency	50/60Hz
Rated short-circuit capacity (Icn)	ETL3-63M: 6kA ETL3-63MH: 10kA
Energy limiting class	3
Rated impulse withstand voltage (Uimp) (1.2/50μs)	4kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960±15°C (Enclosure) 650±10°C (Handle)
Thermal tripping characteristics	1.13In No tripping within an hour 1.45In Tripping within an hour
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In
Electrical life	4,000 Cycles
Mechanical life	8,000 Cycles
Contact position indicator	green OFF / red ON
Ground fault indicator	White: Normal Blue: Leakage fault
Protection degree	IP20
Ambient temperature	-25°C ~ +55°C
Storage temperature	-30°C ~ +70°C
Terminal connection type	Cable/ Pin-type/ Fork-type busbar
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid
Max. tightening torque	2.5N.m
Installation	Mounting on 35mm DIN rail
Incoming method	Bi-directional

## RCD Type



Type AC RCDs detect slowly increasing sinusoidal AC residual currents.



Type A RCDs detect AC leakage currents and pulsed DC leakage currents below 6mA.

## Tripping Sensitivity

30mA

This is the most commonly used protection level in homes and commercial buildings, and is suitable for socket protection in general residential environments, offices and commercial places.

100mA

Usually used in situations where personal protection requirements are not as strict as 30mA, or for equipment protection, such as air conditioning systems, industrial equipment, etc.


300mA

Mainly used for fire protection, such as distribution boards and general protection of large electrical equipment.

## Tripping Characteristics


Curve	Rated current	Condition						
		Thermal release				Magnetic release		
		Non-trip	Trip	Non-trip time	Trip time	Hold current	Trip current	Trip time
B	6-63A	1.13×In		≤1h		3×In		≥0.1
			1.45×In		<1h		5×In	<0.1
C	6-63A	1.13×In		≤1h		5×In		≥0.1
			1.45×In		<1h		10×In	<0.1

B curve

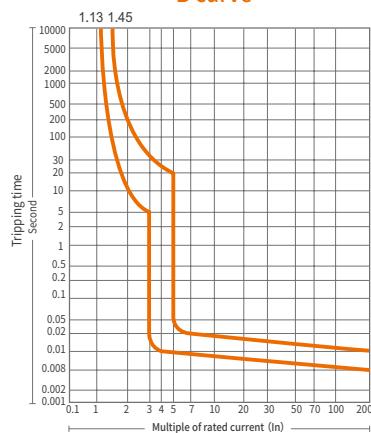

Universal use  
- socket outlet, lighting device

C curve

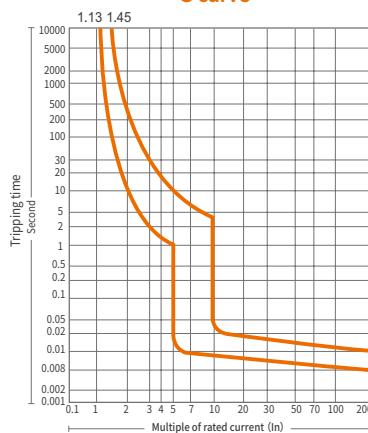

Resistive & inductive loads with  
low inrush current  
- lamp, high starting current motor


## ■ Breaking Time of Residual Current

In(A)	I <sub>Δn</sub> (mA)	Max. breaking time			
		I <sub>Δn</sub>	2I <sub>Δn</sub>	5I <sub>Δn</sub>	5,10,20,50,100,200,500A
6,10,16,20,25,32,40,50,63	30, 100, 300	0.3s	0.15s	0.04s	0.04s


## ■ Temperature Derating Table

Rated current (A)	Correction factor for ambient temperature											
	-40°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
6	8	7.7	7.5	7.2	6.9	6.6	6.3	6	5.7	5.3	4.9	4.5
10	13.3	12.9	12.5	12	11.5	11.1	10.5	10	9.4	8.8	8.2	7.5
16	21.3	20.7	20	19.2	18.5	17.7	16.9	16	15.1	14.1	13.1	11.9
20	26.7	25.8	24.9	24	23.1	22.1	21.1	20	18.9	17.6	16.3	14.9
25	33.3	32.3	31.2	30	28.9	27.6	26.4	25	23.6	22	20.4	18.6
32	42.7	41.3	39.9	38.5	37	35.4	33.7	32	30.2	28.2	26.1	23.9
40	53.3	51.6	49.9	48.1	46.2	44.2	42.2	40	37.7	35.3	32.7	29.8
50	66.7	64.5	62.4	60.1	57.7	55.3	52.7	50	47.1	44.1	40.8	37.3
63	84	81.3	78.6	75.7	72.7	69.6	66.4	63	59.4	55.6	51.4	47

## ■ Wiring Diagram

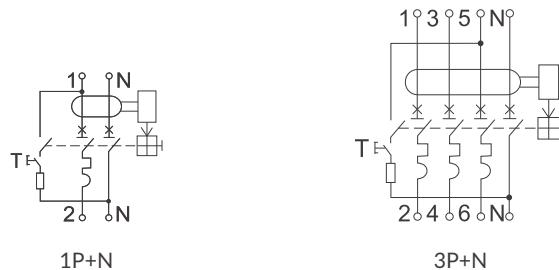

## ■ Dimension (mm)

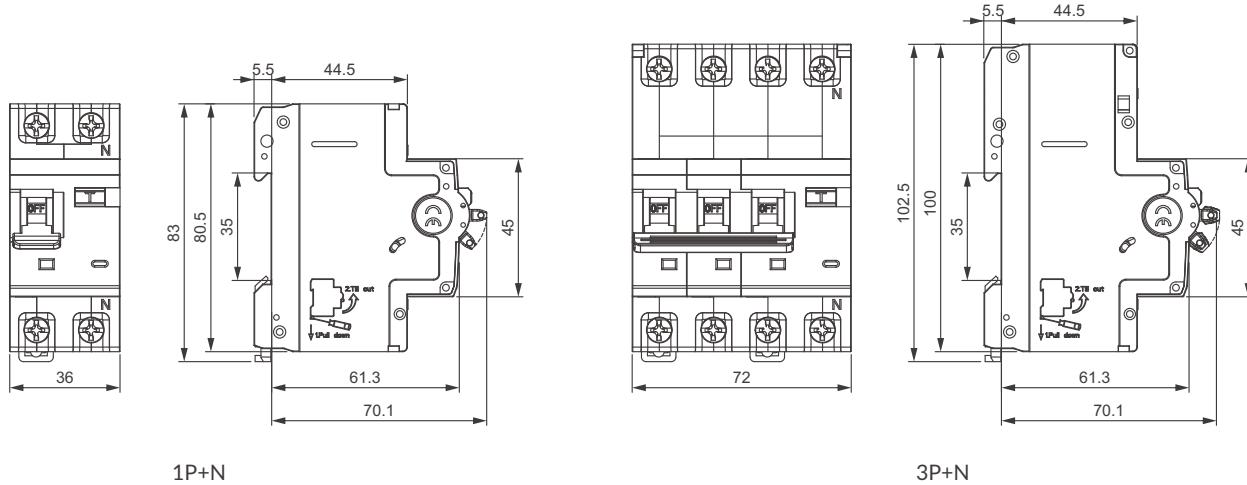

# ETL3-63(H)

Residual Current Circuit Breaker with Overcurrent Protection



**Voltage:** 240/415V AC systems (50/60Hz)

**Electronic type**

**Current range:** 6A to 63A

**AC and A types**

**Rated residual current:** 10, 30, 100, 300mA

**Bidirectional wiring capability**

**Tripping curves:** Type B/C available

**Visual leakage fault indication window**

**Breaking capacity:** 6kA/10kA options

**Transparent trip status observation port**

**Protects against:** overload, short circuit, and leakage faults

**RCBO according to IEC/EN 61009-1**

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment




Electrical safety assurance in public facilities

## ■ Overview

ETL3-63 Residual Current Circuit Breaker with Overcurrent Protection (RCBO) provide protects against overload, short circuit, and leakage faults, supporting 230/240V (1P+N) or 400/415V (3P+N) power systems with ratings up to 63A, its reliable operation across residential and industrial applications.

## ■ Product Tips

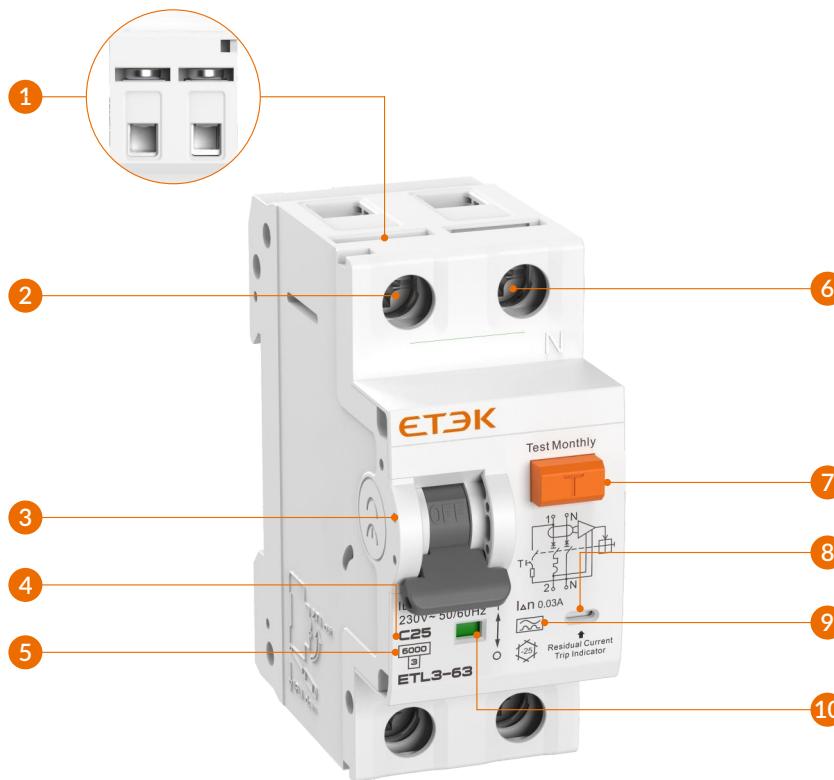

- |                                                   |                                         |
|---------------------------------------------------|-----------------------------------------|
| ① PIN/ Fork busbar                                | ⑥ Neutral line interface                |
| ② Live line interface                             | ⑦ Test button                           |
| ③ The position of handle Lock                     | ⑧ Residual current trip indicator       |
| ④ Tripping characteristics B, C                   | ⑨ Sensitivity to residual current AC, A |
| ⑤ Rated short circuit breaking capacity 6kA, 10kA | ⑩ Contacts position indication window   |

**Technical Data**

Standard	IEC/EN 61009-1
Protection	Ground fault, Overcurrent and short circuit
Type of trip	Ground fault: Electronic
	Overload and short circuit: Thermal-magnetic
Residual current type	AC type - AC residual current
	A type - residual AC and pulsating DC current
No. of poles	1P+N, 3P+N
Insulation voltage (Ui)	500V
Rated voltage (Ue)	1P+N: 230/240V~; 3P+N: 400/415V~
Rated currents (In)	6, 10, 16, 20, 25, 32, 40, 50, 63A
Rated sensitivity currents (I <sub>Δn</sub> )	10, 30, 100, 300mA
Residual current off-time under (I <sub>Δn</sub> )	≤0.1s
Rated residual making and breaking capacity (I <sub>Δm</sub> )	500A (In≤50A)
	10In (In>50A)
Rated frequency	50/60Hz
Rated short-circuit capacity (Icn)	ETL3-63:6kA
	ETL3-63H:10kA
Energy limiting class	3
Rated impulse withstand voltage (U <sub>imp</sub> ) (1.2/50μs)	4kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960±15°C (Enclosure)
	650±10°C (Handle)
Thermal tripping characteristics	1.13In No tripping within an hour
	1.45In Tripping within an hour
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In
Electrical life	4,000 Cycles
Mechanical life	8,000 Cycles
Contact position indicator	green OFF / red ON
Ground fault indicator	White: Normal
	Blue: Leakage fault
Protection degree	IP20
Ambient temperature	-25°C ~ +55°C
Storage temperature	-30°C ~ +70°C
Terminal connection type	Cable/ Pin-type/ Fork-type busbar
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid
Max. tightening torque	2.5N.m
Installation	Mounting on 35mm DIN rail
Incoming method	Bi-directional

## RCD Type



Type AC RCDs detect slowly increasing sinusoidal AC residual currents.



Type A RCDs detect AC leakage currents and pulsed DC leakage currents below 6mA.

## Tripping Sensitivity

10mA

Provides a higher level of protection for the human body and is used in certain situations with very high requirements for electric shock protection, such as children's facilities, swimming pools, bathrooms and other humid environments.

30mA

This is the most commonly used protection level in homes and commercial buildings, and is suitable for socket protection in general residential environments, offices and commercial places.

100mA

Usually used in situations where personal protection requirements are not as strict as 30mA, or for equipment protection, such as air conditioning systems, industrial equipment, etc.


300mA

Mainly used for fire protection, such as distribution boards and general protection of large electrical equipment.

## Tripping Characteristics


Curve	Rated current	Condition						
		Thermal release				Magnetic release		
		Non-trip	Trip	Non-trip time	Trip time	Hold current	Trip current	Trip time
B	6-63A	1.13×In		≤1h		3×In		≥0.1
			1.45×In		<1h		5×In	<0.1
C	6-63A	1.13×In		≤1h		5×In		≥0.1
			1.45×In		<1h		10×In	<0.1

B curve

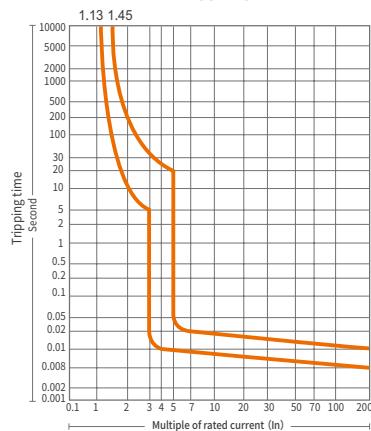

Universal use  
- socket outlet, lighting device

C curve

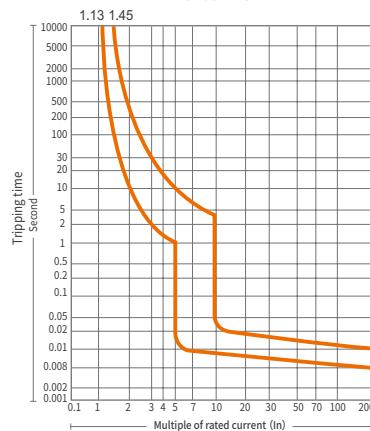

Resistive & inductive loads with  
low inrush current  
- lamp, high starting current motor


## ■ Breaking Time of Residual Current

In(A)	I <sub>Δn</sub> (mA)	Max. breaking time			
		I <sub>Δn</sub>	2I <sub>Δn</sub>	5I <sub>Δn</sub>	5,10,20,50,100,200,500A
6,10,16,20,25,32,40,50,63	10,30, 100, 300	0.1s	0.08s	0.04s	0.04s


## ■ Temperature Derating Table

Rated current (A)	Correction factor for ambient temperature											
	-40°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
6	8	7.7	7.5	7.2	6.9	6.6	6.3	6	5.7	5.3	4.9	4.5
10	13.3	12.9	12.5	12	11.5	11.1	10.5	10	9.4	8.8	8.2	7.5
16	21.3	20.7	20	19.2	18.5	17.7	16.9	16	15.1	14.1	13.1	11.9
20	26.7	25.8	24.9	24	23.1	22.1	21.1	20	18.9	17.6	16.3	14.9
25	33.3	32.3	31.2	30	28.9	27.6	26.4	25	23.6	22	20.4	18.6
32	42.7	41.3	39.9	38.5	37	35.4	33.7	32	30.2	28.2	26.1	23.9
40	53.3	51.6	49.9	48.1	46.2	44.2	42.2	40	37.7	35.3	32.7	29.8
50	66.7	64.5	62.4	60.1	57.7	55.3	52.7	50	47.1	44.1	40.8	37.3
63	84	81.3	78.6	75.7	72.7	69.6	66.4	63	59.4	55.6	51.4	47

## ■ Wiring Diagram

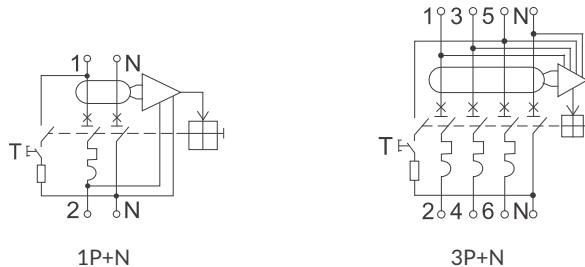

## ■ Dimension (mm)

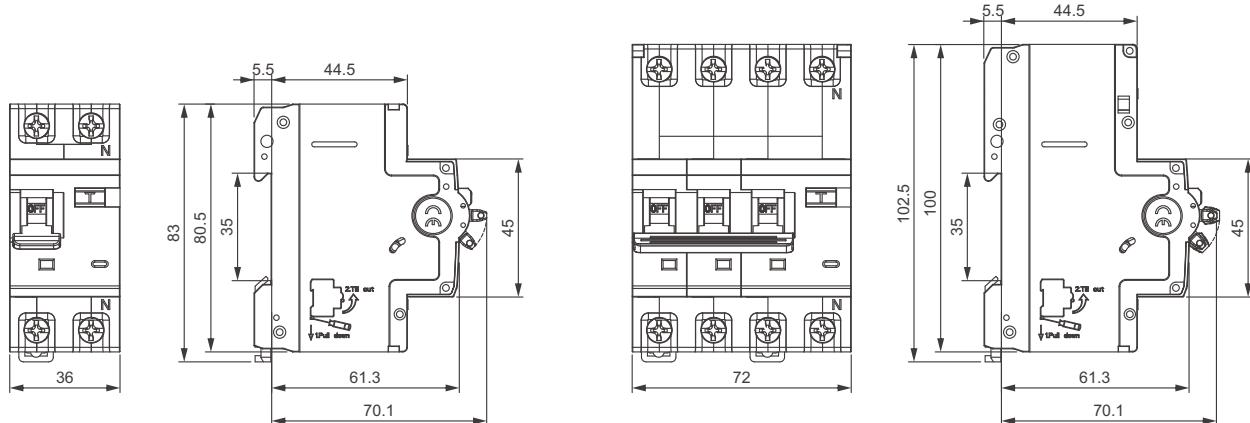

# ETL3-63B

Residual Current Circuit Breaker with Overcurrent Protection



Voltage: 230/240V AC systems (50/60Hz)

Electronic type

Current range: 6A to 63A

B types

Rated residual current: 30mA

Bidirectional wiring capability

Tripping curves: Type B/C available

Visual leakage fault indication window

Breaking capacity: 10kA

Transparent trip status observation port

Protects against overload, short circuit, and leakage faults

RCBO according to IEC/EN 61009-1, IEC/EN 62423

## Applications



EV Charging Stations



Photovoltaic (PV) Systems



UPS Systems




Industrial Welding Equipment

## ■ Overview

ETL3-63B is an IP+N Type B RCBO (Residual Current Circuit Breaker with Overcurrent protection) with up to 63A rated current, 230/240V rated voltage, 10kA breaking capacity, and 30mA residual current sensitivity. It features both B and C curve characteristics and provides comprehensive protection against overcurrent, short circuit, and earth leakage, with advanced detection of complex waveforms and smooth DC residual currents.

With its bidirectional power capability, ETL3-63B is especially suited for modern electrical installations and renewable energy applications, ensuring reliable protection for sensitive equipment such as EV chargers, solar panels, and heat pumps.

## ■ Product Tips

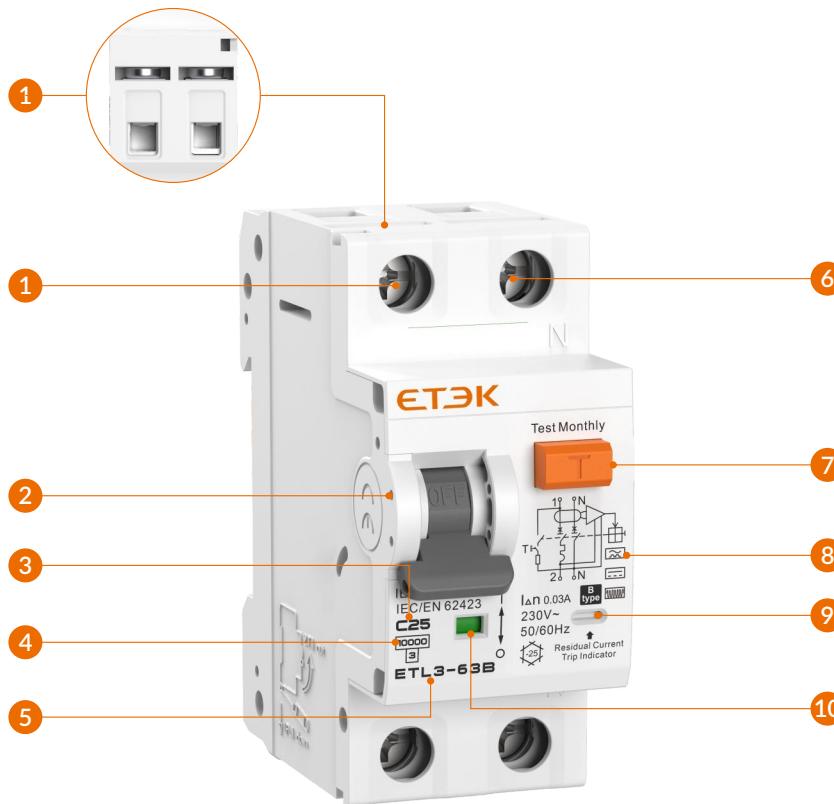

- |                                     |                                       |
|-------------------------------------|---------------------------------------|
| ① PIN/ Fork busbar                  | ⑥ Neutral line interface              |
| ② Live line interface               | ⑦ Test button                         |
| ③ The position of handle Lock       | ⑧ Sensitivity to residual current B   |
| ④ Tripping characteristics B, C     | ⑨ Residual current trip indicator     |
| ⑤ Rated short-circuit capacity 10kA | ⑩ Contacts position indication window |

**Technical Data**

Standard	IEC/EN 61009-1, IEC/EN 62423
Protection	Ground fault, Overcurrent and short circuit
Type of trip	Ground fault: Electronic
	Overload and short circuit: Thermal-magnetic
Residual current type	B Type - residual AC, pulsating and smooth DC current, high frequency ( $\leq 1\text{kHz}$ )
No. of poles	1P+N
Neutral	Switched, N pole on the right
Insulation voltage (Ui)	500V
Rated voltage (Ue)	230/240V~
Rated currents (In)	6, 10, 16, 20, 25, 32, 40, 50, 63A
Rated sensitivity currents ( $I_{\Delta n}$ )	30mA
Residual current off-time under ( $I_{\Delta n}$ )	$\leq 0.1\text{s}$
Rated residual making and breaking capacity ( $I_{\Delta m}$ )	500A ( $I_n \leq 50\text{A}$ ), 10In ( $I_n > 50\text{A}$ )
Rated frequency	50/60Hz
Rated short-circuit capacity (Icn)	10kA
Energy limiting class	3
Rated impulse withstand voltage (Uimp) (1.2/50 $\mu\text{s}$ )	4kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960 $\pm 15^\circ\text{C}$ (Enclosure), 650 $\pm 10^\circ\text{C}$ (Handle)
Thermal tripping characteristics	1.13In No tripping within an hour; 1.45In Tripping within an hour
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In
Electrical life	4,000 Cycles
Mechanical life	10,000 Cycles
Contact position indicator	green OFF/ red ON
Ground fault indicator	White: Normal; Blue: Leakage fault
Protection degree	IP20
Ambient temperature	-25°C ~ +55°C
Storage temperature	-30°C ~ +70°C
Terminal connection type	Cable/ Pin-type/ Fork-type busbar
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid
Max. tightening torque	2.5N.m
Installation	Mounting on 35mm DIN rail
Incoming method	Bi-directional

## RCD Type



Type **AC** RCDs detect slowly increasing sinusoidal AC residual currents.



Type **A** RCDs detect AC leakage currents and pulsed DC leakage currents below 6mA.



Type **B** RCDs detect sinusoidal AC, pulsating DC, multi-frequency composite, and smooth DC residual currents. They are designed to trip at frequencies ranging from 50Hz to 1kHz.

## Tripping Sensitivity

**30mA**

This is the most commonly used protection level in homes and commercial buildings, and is suitable for socket protection in general residential environments, offices and commercial places.


## Tripping Characteristic

Type B RCDs - Standard values of break time and non-actuating time for residual direct currents which result from rectifying circuits and for residual smooth direct current.

Tripping times				
Type	Fault currents	Tripping time at		
	Alternating currents	$1 \times I_{\Delta n}$	$2 \times I_{\Delta n}$	$5 \times I_{\Delta n}$
	Pulsating DC currents	$1.4 \times I_{\Delta n}$	$2 \times 1.4 \times I_{\Delta n}$	$5 \times 1.4 \times I_{\Delta n}$
	Smooth DC currents	$2 \times I_{\Delta n}$	$2 \times 2 \times I_{\Delta n}$	$5 \times 2 \times I_{\Delta n}$
Standard		Max. 0.3s	Max. 0.15s	Max. 0.04s



Type B RCDs - Residual non-operating and operating current according to frequencies which differ from the rated frequency 50/60 Hz

Frequency (Hz)	Residual non-operating current ( $I_{\Delta n}$ )	Residual operating current ( $I_{\Delta n}$ )
150	0.5 $I_{\Delta n}$	2.4 $I_{\Delta n}$
400	0.5 $I_{\Delta n}$	6 $I_{\Delta n}$
1000	$I_{\Delta n}$	14 $I_{\Delta n}$

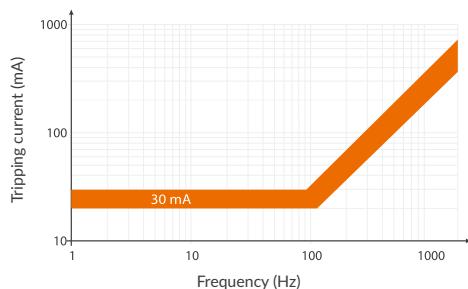


## Tripping Characteristic


Curve	Rated current	Thermal release					Magnetic release			
		Non-trip	Trip	Non-trip time	Trip time	Ambient temperature	Hold current	Trip current	Trip time	Ambient temperature
B	6-63A	1.13In		≤1h		30°C+5°C	3In		≥0.1	Normal temperature
			1.45In		<1h			5In	<0.1	
C	6-63A	1.13In		≤1h		30°C+5°C	5In		≥0.1	Normal temperature
			1.45In		<1h			10In	<0.1	

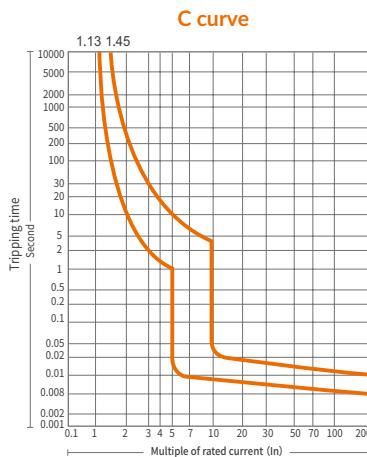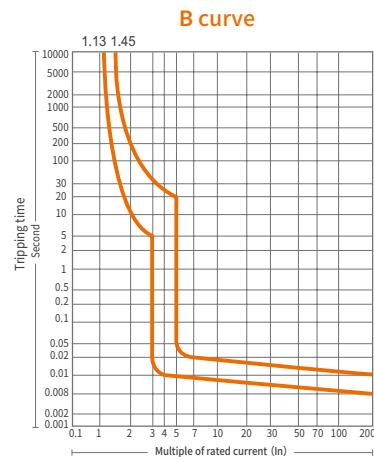

## Wiring Diagram



## Dimension (mm)

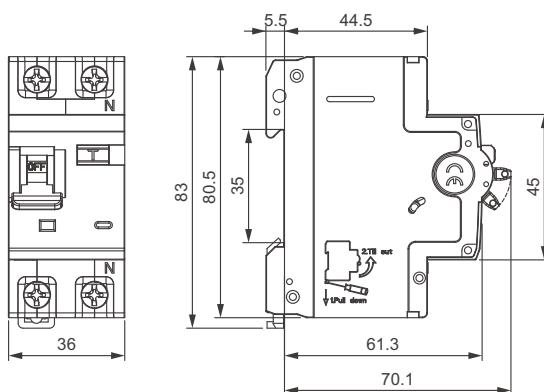

# ETL5-63(H)

Residual Current Circuit Breaker with Overcurrent Protection



**Voltage:** 240/415V AC systems (50/60Hz)

**Electronic type**

**Current range:** 6A to 63A

**AC and A types**

**Rated residual current:** 10, 30, 100, 300mA

**Top incoming wiring**

**Tripping curves:** Type B/C/D available

**Test and reset button**

**Breaking capacity:** 6kA/10kA options

**Transparent trip status observation port**

**Protects against** overload, short circuit, and leakage faults

**RCBO according to IEC/EN 61009-1**

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment




Electrical safety assurance in public facilities

## ■ Overview

ETL5-63 Electronic RCBO (Residual Current Circuit Breaker with Overcurrent Protection) integrates earth-leakage, overload, and short-circuit protection in one compact unit, with wide current ratings from 6 to 63 A. It features both AC and A types for reliable protection—even with non-linear loads—and comes in 1P+N and 3P+N versions. ETL5-63 offers both 6 kA and 10 kA breaking capacity options, meeting a broader range of safety and installation needs in residential and commercial terminal circuits.

## ■ Product Tips

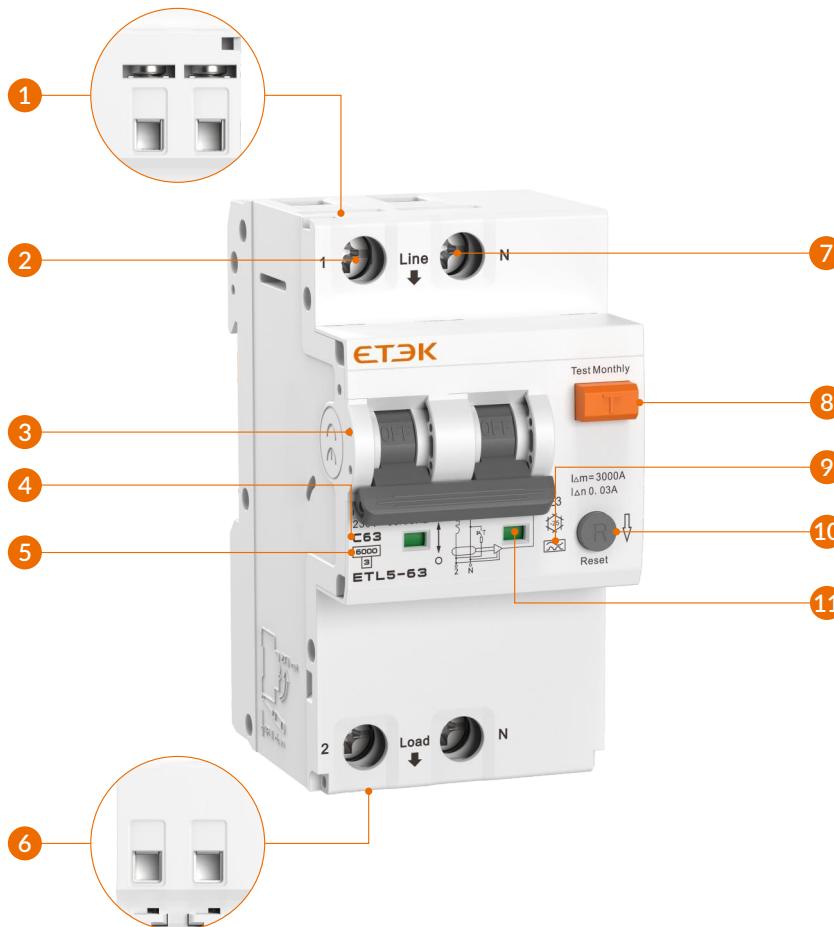

- 1 PIN/ Fork busbar
- 2 Live line interface
- 3 The position of handle Lock
- 4 Tripping characteristics B, C, D
- 5 Rated short circuit breaking capacity 6kA, 10kA
- 6 PIN busbar
- 7 Neutral line interface
- 8 Test button
- 9 Sensitivity to residual current AC, A
- 10 Reset button
- 11 Contacts position indication window

**Technical Data**

Standard	IEC/EN 61009-1	
Protection	Ground fault, Overcurrent and short circuit	
Type of trip	Ground fault: Electronic	
	Overload and short circuit: Thermal-magnetic	
Residual current type	AC, A	
No. of poles	1P+N 3module, 3P+N 5module (with switched neutral)	
Insulation voltage (Ui)	500V	
Rated voltage (Ue)	1P+N: 230/240V~; 3P+N: 400/415V~	
Rated currents (In)	6, 10, 16, 20, 25, 32, 40, 50, 63A	
Rated sensitivity currents (IΔn)	10, 30, 100, 300mA	
Residual current off-time under (IΔn)	≤0.1s	
Rated residual making and breaking capacity (IΔm)	500A (In≤50A)	
	10In (In>50A)	
Rated frequency	50/60Hz	
Rated short-circuit capacity (Icn)	ETL5-63: 6kA	
	ETL5-63H: 10kA	
Energy limiting class	3	
Rated impulse withstand voltage (Uimp) (1.2/50μs)	4kV	
Dielectric test voltage	2kV (50/60Hz, 1 min.)	
Fire resistance (glow-wire test)	960±15°C (Enclosure)	
	650±10°C (Handle)	
Thermal tripping characteristics	1.13In No tripping within an hour	
	1.45In Tripping within an hour	
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In; D: 10In-20In	
Electrical life	4,000 Cycles	
Mechanical life	10,000 Cycles	
Contact position indicator	green OFF / red ON	
Protection degree	IP20	
Ambient temperature	-25°C ~ +55°C	
Storage temperature	-30°C ~ +70°C	
Terminal connection type	Line side terminals	Cable/ Pin-type/ Fork-type busbar
	Load side terminals	Cable/ Pin-type
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid	
Max. tightening torque	2.5N.m	
Installation	Mounting on 35mm DIN rail	
Incoming method	From top	

## RCD Type



Type AC RCDs detect slowly increasing sinusoidal AC residual currents.



Type A RCDs detect AC leakage currents and pulsed DC leakage currents below 6mA.

## Tripping Sensitivity

10mA

Provides a higher level of protection for the human body and is used in certain situations with very high requirements for electric shock protection, such as children's facilities, swimming pools, bathrooms and other humid environments.

30mA

This is the most commonly used protection level in homes and commercial buildings, and is suitable for socket protection in general residential environments, offices and commercial places.

100mA

Usually used in situations where personal protection requirements are not as strict as 30mA, or for equipment protection, such as air conditioning systems, industrial equipment, etc.


300mA

Mainly used for fire protection, such as distribution boards and general protection of large electrical equipment.

## Tripping Characteristics


Curve	Rated current	Thermal release				Magnetic release		
		Non-trip	Trip	Non-trip time	Trip time	Hold current	Trip current	Trip time
B	6-63A	1.13In		≤1h		3In		≥0.1
			1.45In		<1h		5In	<0.1
C	6-63A	1.13In		≤1h		5In		≥0.1
			1.45In		<1h		10In	<0.1
D	6-63A	1.13In		≤1h		10In		≥0.1
			1.45In		<1h		20In	<0.1

B curve

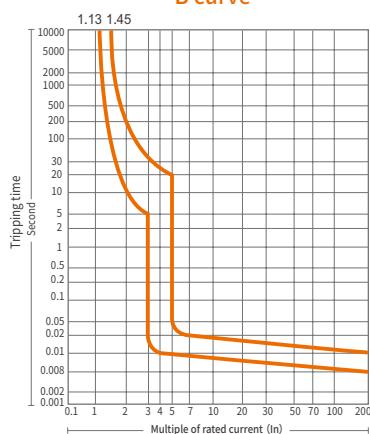


Universal use  
- socket outlet, lighting device

C curve

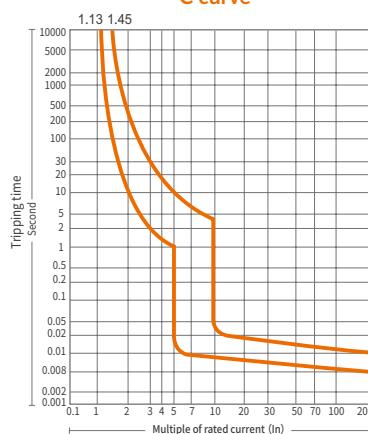

Resistive & inductive loads with low inrush current  
- lamp, high starting current motor

D curve

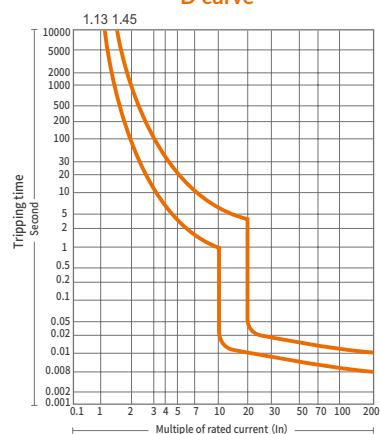

Loads with high inrush current  
- transformer, solenoid valve, 2 pole motor


## ■ Breaking Time of Residual Current

In(A)	I <sub>Δn</sub> (mA)	Max. breaking time			
		I <sub>Δn</sub>	2I <sub>Δn</sub>	5I <sub>Δn</sub>	5,10,20,50,100,200,500A
6,10,16,20,25,32,40,50,63	10,30, 100, 300	0.1s	0.08s	0.04s	0.04s


## ■ Temperature Derating Table

Rated current (A)	Correction factor for ambient temperature											
	-40°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
6	8	7.7	7.5	7.2	6.9	6.6	6.3	6	5.7	5.3	4.9	4.5
10	13.3	12.9	12.5	12	11.5	11.1	10.5	10	9.4	8.8	8.2	7.5
16	21.3	20.7	20	19.2	18.5	17.7	16.9	16	15.1	14.1	13.1	11.9
20	26.7	25.8	24.9	24	23.1	22.1	21.1	20	18.9	17.6	16.3	14.9
25	33.3	32.3	31.2	30	28.9	27.6	26.4	25	23.6	22	20.4	18.6
32	42.7	41.3	39.9	38.5	37	35.4	33.7	32	30.2	28.2	26.1	23.9
40	53.3	51.6	49.9	48.1	46.2	44.2	42.2	40	37.7	35.3	32.7	29.8
50	66.7	64.5	62.4	60.1	57.7	55.3	52.7	50	47.1	44.1	40.8	37.3
63	84	81.3	78.6	75.7	72.7	69.6	66.4	63	59.4	55.6	51.4	47

## ■ Wiring Diagram



1P+N




3P+N


## ■ Dimension (mm)



1P+N



3P+N

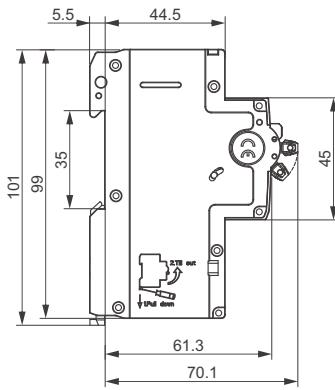

# ETL5-63B

Residual Current Circuit Breaker with Overcurrent Protection



Voltage: 240/415V AC systems (50/60Hz)

Electronic type

Current range: 6A to 63A

B types

Rated residual current: 30, 100, 300mA

Top incoming wiring

Tripping curves: Type B/C/D available

Transparent trip status observation port

Breaking capacity: 10kA

RCBO according to IEC/EN 61009-1, IEC/EN 62423

Protects against overload, short circuit, and leakage faults

## Applications



EV Charging Stations



Photovoltaic (PV) Systems



UPS Systems




Industrial Welding Equipment

## ■ Overview

ETL5-63B Type B RCBO (Residual Current Circuit Breaker with Overcurrent protection) is a combined protective device that integrates residual current protection (RCD) and overcurrent protection (MCB), with a rated current up to 63A. It supports single-phase 230/240V and three-phase 400/415V systems, features a 10kA breaking capacity, and meets IEC61009-1 and IEC62423 standards.

Type B RCBOs are specifically designed to detect smooth DC residual currents, as well as AC and pulsating DC currents. This makes them ideal for applications such as industrial environments with variable speed drives, solar panel systems, EV charging stations, commercial distribution boards, and residential installations where enhanced earth leakage protection is required.

## ■ Product Tips

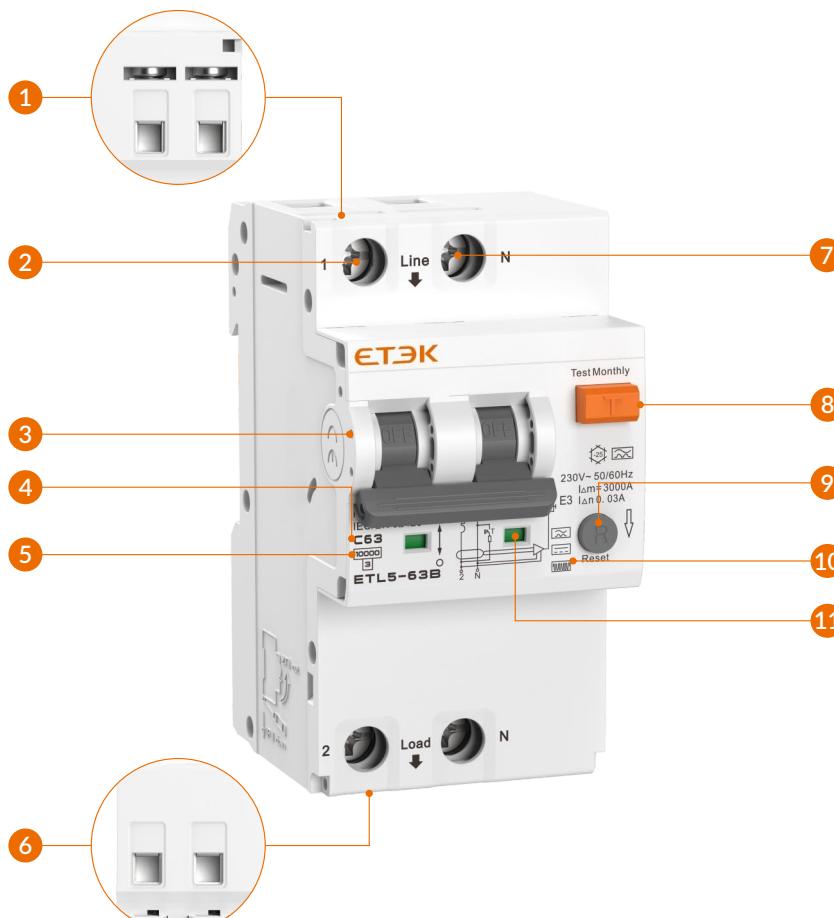

- |                                     |                                        |
|-------------------------------------|----------------------------------------|
| 1 PIN/ Fork busbar                  | 7 Neutral line interface               |
| 2 Live line interface               | 8 Test button                          |
| 3 The position of handle Lock       | 9 Reset button                         |
| 4 Tripping characteristics B, C, D  | 10 Sensitivity to residual current B   |
| 5 Rated short-circuit capacity 10kA | 11 Contacts position indication window |
| 6 PIN busbar                        |                                        |

**Technical Data**

Standard	IEC/EN 61009-1, IEC/EN 62423	
Protection	Ground fault, Overcurrent and short circuit	
Type of trip	Ground fault: Electronic	
	Overload and short circuit: Thermo-magnetic	
Residual current type	B Type - residual AC, pulsating and smooth DC current, high frequency ( $\leq 1\text{kHz}$ )	
No. of poles	1P+N, 3P+N	
Neutral	Switched, N pole on the right	
Insulation voltage (Ui)	500V	
Rated voltage (Ue)	1P+N: 230/240V~; 3P+N: 400/415V~	
Rated currents (In)	6, 10, 16, 20, 25, 32, 40, 50, 63A	
Rated sensitivity currents ( $I_{\Delta n}$ )	30, 100, 300mA	
Residual current off-time under ( $I_{\Delta n}$ )	$\leq 0.1\text{s}$	
Rated residual making and breaking capacity ( $I_{\Delta m}$ )	500A ( $I_n \leq 50\text{A}$ ), 10In ( $I_n > 50\text{A}$ )	
Rated frequency	50/60Hz	
Rated short-circuit capacity (Icn)	10kA	
Energy limiting class	3	
Rated impulse withstand voltage (Uimp) (1.2/50 $\mu\text{s}$ )	4kV	
Dielectric test voltage	2kV (50/60Hz, 1 min.)	
Fire resistance (glow-wire test)	960 $\pm 15^\circ\text{C}$ (Enclosure); 650 $\pm 10^\circ\text{C}$ (Handle)	
Thermal tripping characteristics	1.13In No tripping within an hour; 1.45In Tripping within an hour	
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In; D: 10In-20In	
Electrical life	4,000 Cycles	
Mechanical life	10,000 Cycles	
Contact position indicator	green OFF/ red ON	
Protection degree	IP20	
Ambient temperature	-25 $^\circ\text{C}$ ~ +55 $^\circ\text{C}$ , Max. 95% humidity	
Terminal connection type	Line side terminals	Cable/ Pin-type/ Fork-type busbar
	Load side terminals	Cable/ Pin-type
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid	
Max. tightening torque	2.5N.m	
Installation	Mounting on 35mm DIN rail	
Incoming method	From top	

## ■ RCD Type



Type **AC** RCDs detect slowly increasing sinusoidal AC residual currents.



Type **A** RCDs detect AC leakage currents and pulsed DC leakage currents below 6mA.



Type **B** RCDs detect sinusoidal AC, pulsating DC, multi-frequency composite, and smooth DC residual currents. They are designed to trip at frequencies ranging from 50Hz to 1kHz.

## ■ Tripping Sensitivity

**30mA**

This is the most commonly used protection level in homes and commercial buildings, and is suitable for socket protection in general residential environments, offices and commercial places.

**100mA**

Usually used in situations where personal protection requirements are not as strict as 30mA, or for equipment protection, such as air conditioning systems, industrial equipment, etc.

**300mA**

Mainly used for fire protection, such as distribution boards and general protection of large electrical equipment.


## ■ Tripping Characteristic

Type B RCDs - Standard values of break time and non-actuating time for residual direct currents which result from rectifying circuits and for residual smooth direct current.

Tripping times					
Type	Fault currents	Tripping time at			
	Alternating currents	1× $I_{\Delta n}$	2× $I_{\Delta n}$	5× $I_{\Delta n}$	500A
	Pulsating DC currents	1.4× $I_{\Delta n}$	2×1.4× $I_{\Delta n}$	5×1.4× $I_{\Delta n}$	500A
	Smooth DC currents	2× $I_{\Delta n}$	2×2× $I_{\Delta n}$	5×2× $I_{\Delta n}$	500A
Standard		Max. 0.3s	Max. 0.15s	Max. 0.04s	Max. 0.04s


Type B RCDs - Residual non-operating and operating current according to frequencies which differ from the rated frequency 50/60 Hz

Frequency (Hz)	Residual non-operating current ( $I_{\Delta n}$ )	Residual operating current ( $I_{\Delta n}$ )
150	0.5 $I_{\Delta n}$	2.4 $I_{\Delta n}$
400	0.5 $I_{\Delta n}$	6 $I_{\Delta n}$
1000	$I_{\Delta n}$	14 $I_{\Delta n}$

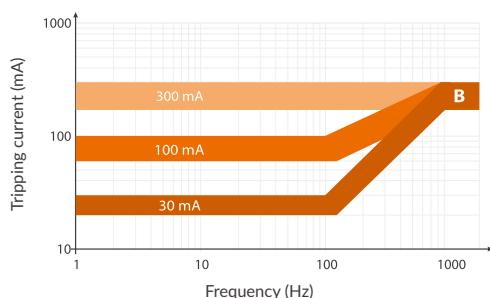


## Tripping Characteristic


Curve	Rated current	Thermal release					Magnetic release			
		Non-trip	Trip	Non-trip time	Trip time	Ambient temperature	Hold current	Trip current	Trip time	Ambient temperature
B	6-63A	1.13In		≤1h		30°C+5°C	3In		≥0.1	Normal temperature
			1.45In		<1h			5In	<0.1	
C	6-63A	1.13In		≤1h		30°C+5°C	5In		≥0.1	Normal temperature
			1.45In		<1h			10In	<0.1	
D	6-63A	1.13In		≤1h		30°C+5°C	10In		≥0.1	Normal temperature
			1.45In		<1h			20In	<0.1	

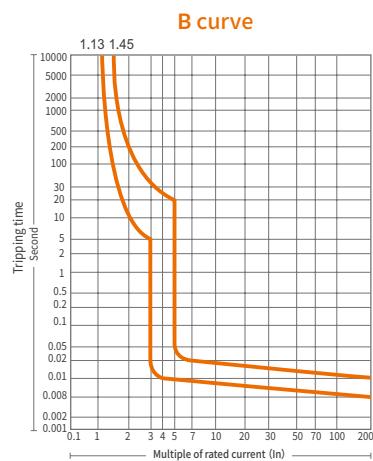

Universal use  
- socket outlet, lighting device


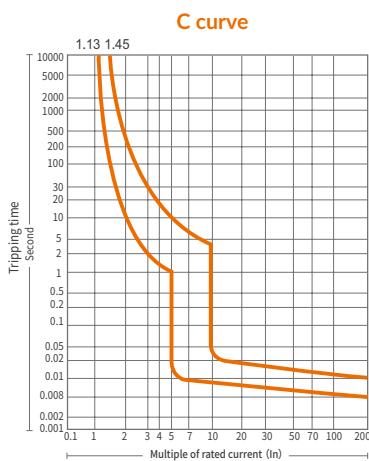


Resistive & inductive loads with  
low inrush current  
- lamp, high starting current motor



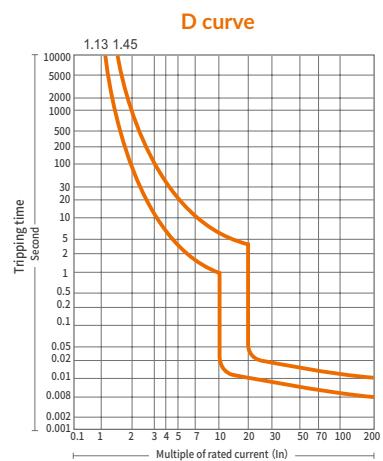


Loads with high inrush current  
- transformer, solenoid valve,  
2 pole motor

## Wiring Diagram

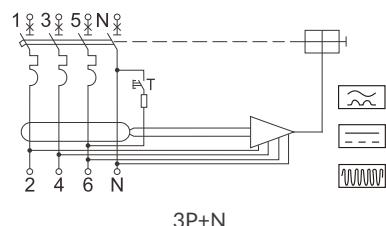

## Dimension (mm)

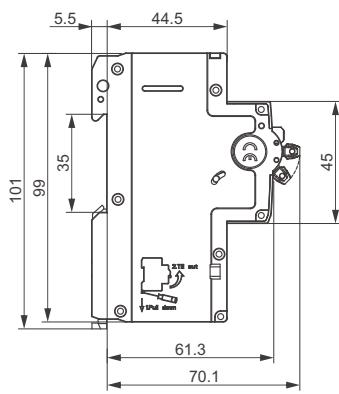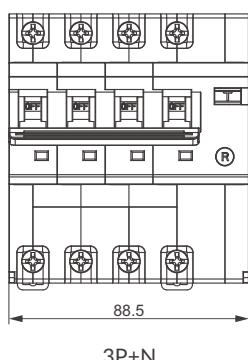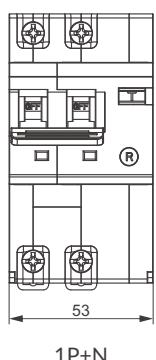

# ETL1-63(H)

Residual Current Circuit Breaker



**Voltage:** 240/415V AC systems (50/60Hz)

**Electro-magnetic type**

**Current range:** 16A to 63A

**AC, A, A-SI, A-S types**

**Rated residual current:** 10, 30, 100, 300mA

**Bidirectional wiring capability**

**Breaking capacity:** 6kA/10kA options

**Contact position indication**

**Protects against leakage faults**

**RCCB according to IEC/EN 61008-1**

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment




Electrical safety assurance in public facilities

## ■ Overview

ETL1-63 Residual Current Circuit Breaker (RCCB) offers reliable protection against electrical leakage currents, significantly reducing the risk of electric shock caused by indirect contact. Designed for versatility, it supports both single-phase (240V, 1P+N) and three-phase (415V, 3P+N) power systems, with a rated current capacity of up to 63A. This ensures dependable performance for a wide range of applications in residential, commercial, and industrial environments.

## ■ Product Tips

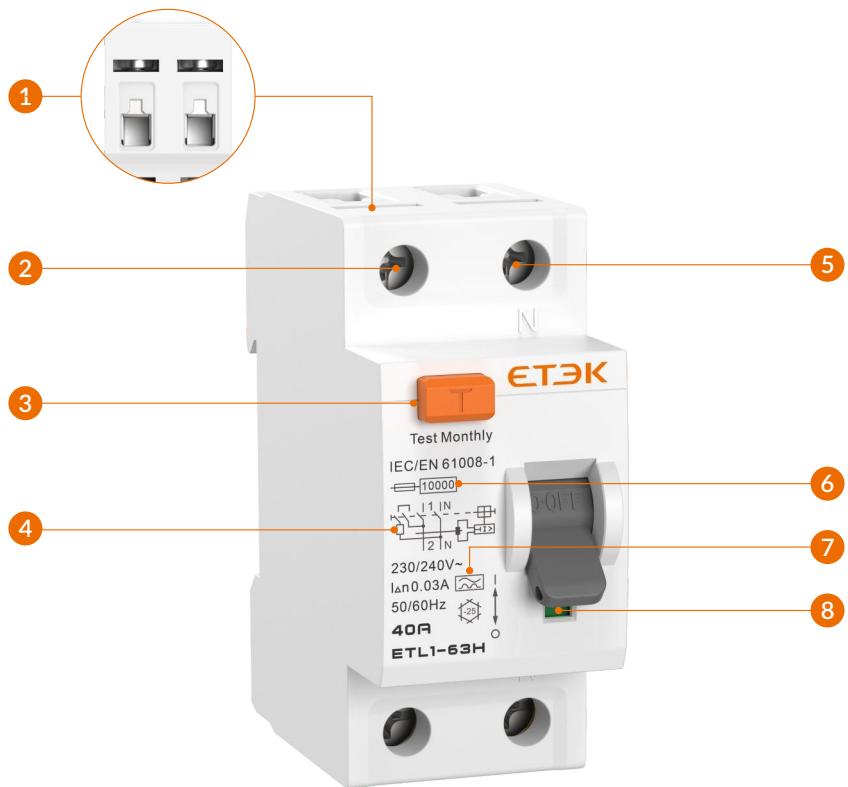

- 1** PIN/ Fork busbar
- 2** Live line interface
- 3** Test button
- 4** Wiring Diagram

- 5** Neutral line interface
- 6** Rated conditional short-circuit current 6kA, 10kA
- 7** Sensitivity to residual current AC, A, A-SI, A-S
- 8** Contacts position indication window

**Technical Data**

Standard	IEC/EN 61008-1
Protection	Ground fault
Type of trip	Electro-magnetic type
Residual current type	AC, A, A-SI, A-S
Break time at $I_{\Delta n}$	AC, A undelayed type: $\leq 100ms$ A-SI delay: 10-300ms A-S delay: 130-500ms
No. of poles	1P+N, 3P+N, N Pole on the right
Insulation voltage (Ui)	500V
Rated voltage (Ue)	1P+N:230/240V~; 3P+N:400/415V~
Rated currents (In)	16, 25, 32, 40, 63A
Rated sensitivity currents ( $I_{\Delta n}$ )	10mA (only for 1P+N 16A,25A) 30, 100, 300mA
Rated residual making and breaking capacity ( $I_{\Delta m}$ )	500A ( $I_n \leq 50A$ ) 10In ( $I_n > 50A$ )
Rated frequency	50/60Hz
Rated conditional short-circuit current ( $I_{nc}=I_{dc}$ )	ETL1-63: 6kA ETL1-63H: 10kA
Rated impulse withstand voltage (Uimp) (1.2/50μs)	4kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960±15°C (Enclosure) 650±10°C (Handle)
Electrical life	2,000 Cycles
Mechanical life	4,000 Cycles
Contact position indicator	green OFF / red ON
Protection degree	IP20
Ambient temperature	-25°C ~ +40°C
Storage temperature	-30°C ~ +70°C
Terminal connection type	Cable/ Pin-type/ Fork-type busbar
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid
Max. tightening torque	2.5N.m
Installation	Mounting on 35mm DIN rail
Incoming method	Bi-directional

## RCD Type



Type **AC** RCDs detect slowly increasing sinusoidal AC residual currents.



Type **A** RCDs detect AC leakage currents and pulsed DC leakage currents below 6mA.



Type **S, G/S** RCDs not only can it ensure the tripping response to sinusoidal AC residual currents, but it can also effectively detect and trip pulsed DC residual currents, regardless of whether these leakage currents increase suddenly or slowly.

## Tripping Sensitivity

**10mA**

Provides a higher level of protection for the human body and is used in certain situations with very high requirements for electric shock protection, such as children's facilities, swimming pools, bathrooms and other humid environments.

**30mA**

This is the most commonly used protection level in homes and commercial buildings, and is suitable for socket protection in general residential environments, offices and commercial places.

**100mA**

Usually used in situations where personal protection requirements are not as strict as 30mA, or for equipment protection, such as air conditioning systems, industrial equipment, etc.

**300mA**

Mainly used for fire protection, such as distribution boards and general protection of large electrical equipment.

## Tripping Time

Instantaneous	Two types of leakage protectors, AC and A, are usually designed to quickly disconnect circuits ( $\leq 300\text{ms}$ ) to protect people from electric shock.
Short time delay <b>G/SI</b>	Designed for use in situations where rapid power outage is required to protect equipment. They have shorter trip times (10-300ms) than Type AC and Type A RCDs to minimize damage to the equipment.
Selective <b>S</b>	Designed to allow downstream RCDs to trip before upstream RCDs, thereby achieving precise isolation of faulty sections. The S-type RCD is designed with a longer tripping time (130-500ms) to coordinate with other RCDs in the power distribution system to avoid unnecessary power outages.


## Breaking Time of Residual Current

In(A)	I $\Delta$ n(mA)	Max. breaking time			
		I $\Delta$ n	2I $\Delta$ n	5I $\Delta$ n	5,10,20,50,100,200,500A
16,25,32,40,63	10, 30, 100, 300	0.3s	0.15s	0.04s	0.04s


## ■ Wiring Capacity

Rated current In (A)	Cross section area s (mm <sup>2</sup> )	Tightening torque (N.m)
16	2.5	2.5
25	4	2.5
32	6	2.5
40	10	2.5
63	16	2.5

## ■ Wiring Diagram





1P+N



3P+N

## ■ Dimension (mm)

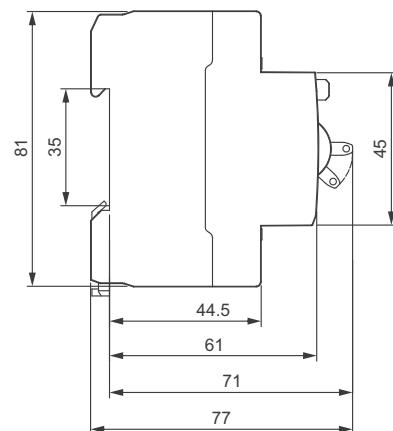

# ETL1-63B

Residual Current Circuit Breaker



**Voltage:** 240/415V AC systems (50/60Hz)

**Electro-magnetic type**

**Current range:** 16A to 63A

**B type**

**Rated residual current:** 30, 100, 300mA

**Bidirectional wiring capability**

**Breaking capacity:** 10kA options

**Contact position indication**

**Protects against leakage faults**

**RCCB according to IEC/EN 61008-1, IEC/EN 62423**

## Applications



EV Charging Stations



Photovoltaic (PV) Systems



UPS Systems




Industrial Welding Equipment

## ■ Overview

ETL1-63B Type B Residual Current Circuit Breaker (RCCB) suitable for 230/240V (1P+N) or 400/415V (3P+N) power systems, with a rated current up to 63A. Designed to detect AC leakage currents, pulsating DC leakage currents, smooth DC leakage currents, composite waveform leakage currents, and high-frequency leakage currents up to 1kHz.

When human electric shock occurs or circuit leakage current exceeds specified values, the circuit breaker instantaneously disconnects the faulty power supply to protect personnel and electrical equipment. It can also serve for infrequent circuit switching operations under normal conditions.

## ■ Product Tips

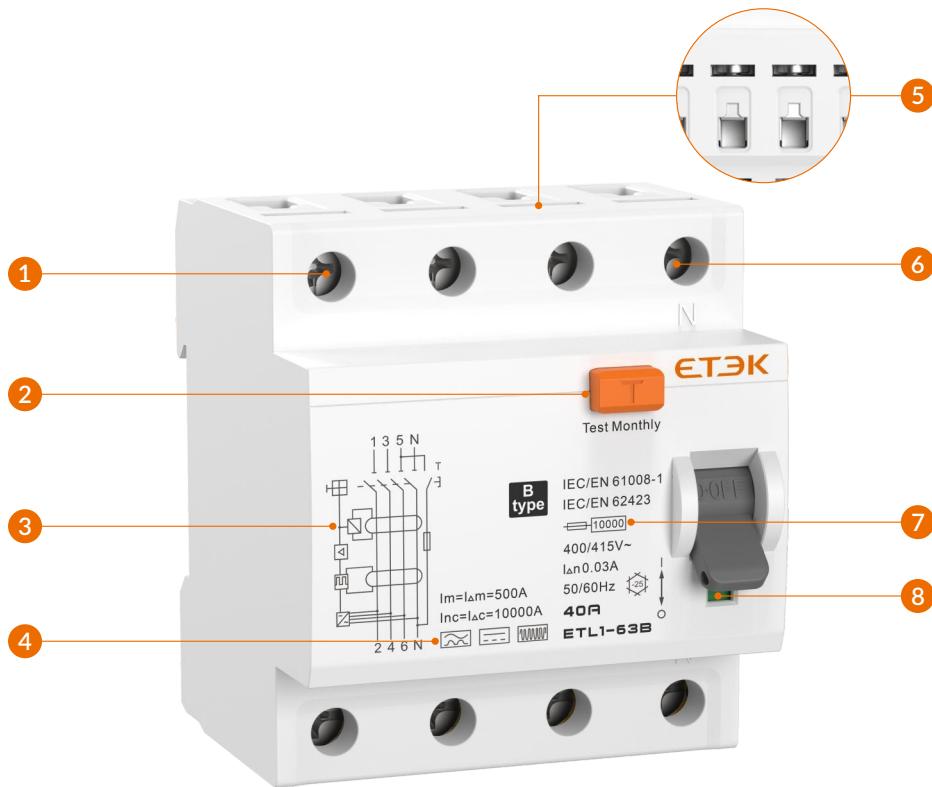

- 1** Live line interface
- 2** Test button
- 3** Wiring Diagram
- 4** Sensitivity to residual current B

- 5** PIN/ Fork busbar
- 6** Neutral line interface
- 7** Rated short circuit breaking capacity 10kA
- 8** Contacts position indication window

**Technical Data**

Standard	IEC/EN 61008-1, IEC/EN 62423
Protection	Ground fault
Type of trip	Electro-magnetic type
Residual current type	B Type - residual AC, pulsating and smooth DC current, high frequency ( $\leq 1\text{kHz}$ )
Time characteristic	Insensitivity
No. of poles	1P+N, 3P+N, N Pole on the right
Insulation voltage (Ui)	500V
Rated voltage (Ue)	1P+N:230/240V~; 3P+N:400/415V~
Rated currents (In)	16, 25, 32, 40, 63A
Rated sensitivity currents ( $I_{\Delta n}$ )	30, 100, 300mA
Residual current off-time under ( $I_{\Delta n}$ )	$\leq 0.1\text{s}$
Rated residual making and breaking capacity ( $I_{\Delta m}$ )	500A ( $I_{\Delta n} \leq 50\text{A}$ )
	10In ( $I_{\Delta n} > 50\text{A}$ )
Rated frequency	50/60Hz
Rated short-circuit capacity (Icn)	10kA
Rated conditional residual short-circuit current ( $I_{\Delta c}$ )	10kA
Rated impulse withstand voltage (Uimp) (1.2/50 $\mu\text{s}$ )	4kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960 $\pm 15^\circ\text{C}$ (Enclosure)
	650 $\pm 10^\circ\text{C}$ (Handle)
Electrical life	2,000 Cycles
Mechanical life	4,000 Cycles
Contact position indicator	green OFF / red ON
Protection degree	IP20
Ambient temperature	-25 $^\circ\text{C}$ ~ +40 $^\circ\text{C}$
Storage temperature	-30 $^\circ\text{C}$ ~ +70 $^\circ\text{C}$
Terminal connection type	Cable/ Pin-type/ Fork-type busbar
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid
Max. tightening torque	2.5N.m
Installation	Mounting on 35mm DIN rail
Incoming method	Bi-directional

## RCD Type



Type **AC** RCDs detect slowly increasing sinusoidal AC residual currents.



Type **A** RCDs detect AC leakage currents and pulsed DC leakage currents below 6mA.



Type **B** RCDs detect sinusoidal AC, pulsating DC, multi-frequency composite, and smooth DC residual currents. They are designed to trip at frequencies ranging from 50Hz to 1kHz.

## Tripping Sensitivity

**30mA**

This is the most commonly used protection level in homes and commercial buildings, and is suitable for socket protection in general residential environments, offices and commercial places.

**100mA**

Usually used in situations where personal protection requirements are not as strict as 30mA, or for equipment protection, such as air conditioning systems, industrial equipment, etc.

**300mA**

Mainly used for fire protection, such as distribution boards and general protection of large electrical equipment.


## Tripping Characteristic

Type B RCDs - Standard values of break time and non-actuating time for residual direct currents which result from rectifying circuits and for residual smooth direct current.

Tripping times				
Type	Fault currents	Tripping time at		
	Alternating currents	$1 \times I_{\Delta n}$	$2 \times I_{\Delta n}$	$5 \times I_{\Delta n}$
	Pulsating DC currents	$1.4 \times I_{\Delta n}$	$2 \times 1.4 \times I_{\Delta n}$	$5 \times 1.4 \times I_{\Delta n}$
	Smooth DC currents	$2 \times I_{\Delta n}$	$2 \times 2 \times I_{\Delta n}$	$5 \times 2 \times I_{\Delta n}$
Standard		Max. 0.3s	Max. 0.15s	Max. 0.04s

Type B RCDs - Residual non-operating and operating current according to frequencies which differ from the rated frequency 50/60 Hz


Frequency (Hz)	Residual non-operating current ( $I_{\Delta n}$ )	Residual operating current ( $I_{\Delta n}$ )
150	0.5 $I_{\Delta n}$	2.4 $I_{\Delta n}$
400	0.5 $I_{\Delta n}$	6 $I_{\Delta n}$
1000	$I_{\Delta n}$	14 $I_{\Delta n}$

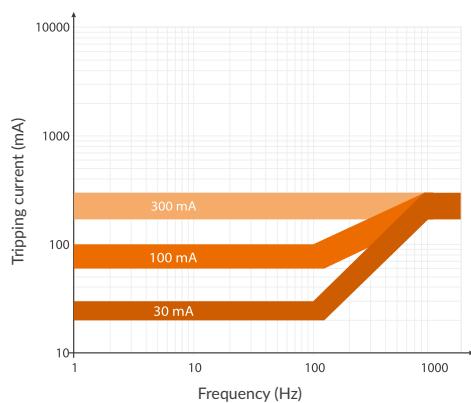


## Wiring Capacity

Rated current In (A)	Cross section area s (mm <sup>2</sup> )	Tightening torque (N.m)
16	2.5	2.5
25	4	2.5
32	6	2.5
40	10	2.5
63	16	2.5

## Wiring Diagram

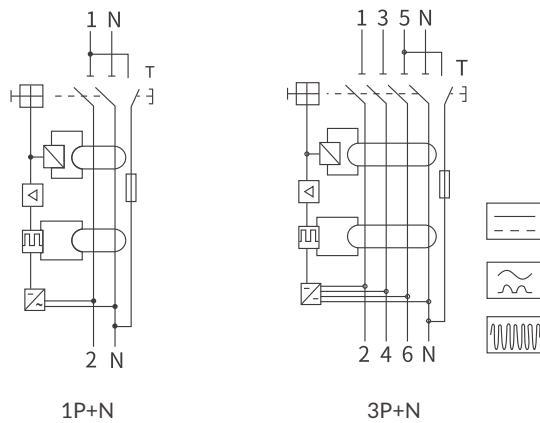

## Dimension (mm)

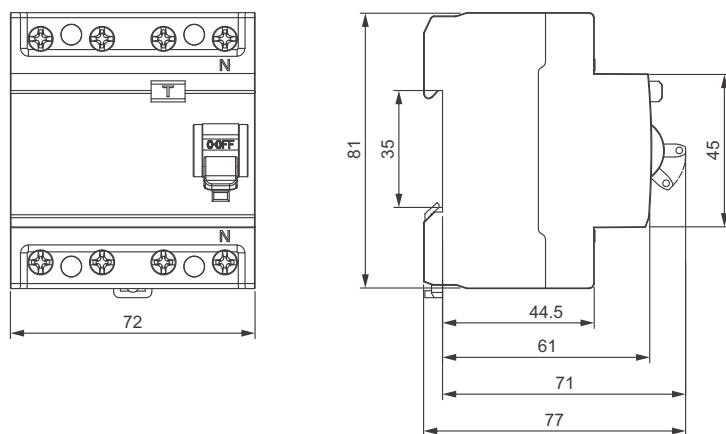

# ETM1-63(H)AFD

Arc Fault Detection Device



Normal

Fault

Voltage: 230/240V AC systems (50/60Hz)

Thermal-magnetic type

Current range: 6A to 63A

From bottom wiring capability

Tripping curves: Type B/C available

Arc test button with built-in indicator light

Breaking capacity: 6kA/10kA options

Transparent trip status observation port

Protects against overload, short circuit and arc fault

AFDD according to IEC/EN 60898-1, IEC/EN 62026

## Applications



High-risk residential buildings



Houses in multiple occupation



Purpose-built student accommodation



Care homes




Other locations requiring high-security socket circuits

## ■ Overview

ETM1-63AFD is an Arc Fault Detection Device (AFDD) with an integrated miniature circuit breaker (MCB), engineered to mitigate electrical fire risks by detecting hazardous series and parallel arc faults. It offers a 10 kA short-circuit breaking capacity and supports rated currents up to 63 A, making it suitable for residential, commercial, and light industrial installations.

ETM1-63AFD features an LED arc-fault indicator for clear status feedback. Its compact 36 mm width saves distribution board space while maintaining comprehensive protection against arc faults, overloads, and short circuits.

## ■ Product Tips

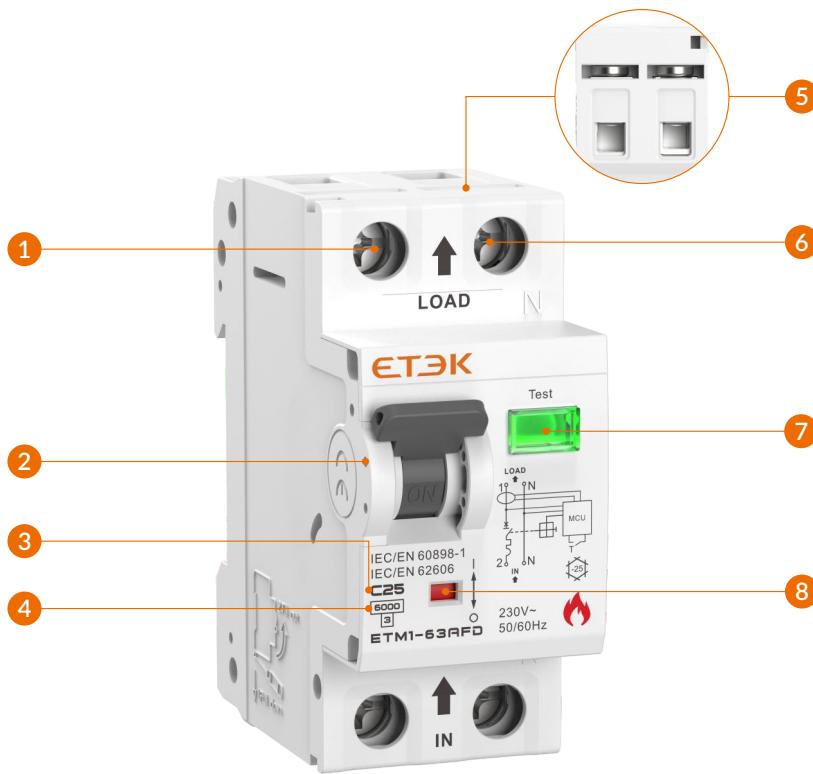


- |                                                   |                                                 |
|---------------------------------------------------|-------------------------------------------------|
| ① Live line interface                             | ⑤ PIN/ Fork busbar                              |
| ② The position of handle lock                     | ⑥ Neutral line interface                        |
| ③ Tripping characteristics B, C                   | ⑦ Arc test button with built-in indicator light |
| ④ Rated short circuit breaking capacity 6kA, 10kA | ⑧ Contacts position indication window           |

**Technical Data**


Standard	IEC/EN 60898-1, IEC/EN 62026	
Protection	Arc fault protection	
	Overload protection, Short-circuit protection	
Type of trip	Overload and short circuit	Thermal-magnetic
	Arc fault	Serial arcing fault
		Parallel arcing fault
		Grounding arc fault
No. of poles	1P+N (Neutral unswitched)	
Rated insulation voltage (Ui)	500V	
Rated voltage (Ue)	230/240V	
Rated currents (In)	6, 10, 16, 20, 25, 32, 40, 50, 63A	
Rated frequency	50/60Hz	
Rated short-circuit capacity (Icn)	ETM1-63AFD: 6kA	
	ETM1-63HAFD: 10kA	
Energy limiting class	3	
Rated impulse withstand voltage (Uimp) (1.2/50μs)	4kV	
Dielectric test voltage	2kV (50/60Hz, 1 min.)	
Thermal tripping characteristics	1.13In No tripping within an hour; 1.45In Tripping within an hour	
Instantaneous tripping characteristics	B: 3In-5In; C: 5In-10In	
Electrical life	4,000 Cycles	
Mechanical life	10,000 Cycles	
Contact position indication	green OFF / red ON	
Arc detection button	Yes	
Arc fault indicator	Green: Normal	
	Red: Fault	
Protection degree	IP20	
Ambient temperature	-25°C ~ +55°C	
Storage temperature	-30°C ~ +70°C	
Terminal connection type	Cable/ Pin-type/ Fork-type busbar	
Max. terminal size for cable	16mm <sup>2</sup> flexible/ 25mm <sup>2</sup> rigid	
Max. tightening torque	2.5N.m	
Installation	Mounting on 35mm DIN rail	
Incoming method	From bottom	

## Tripping Characteristic

Curve	Rated current	Thermal release					Magnetic release			
		Non-trip	Trip	Non-trip time	Trip time	Ambient temperature	Hold current	Trip current	Trip time	Ambient temperature
B	6-63A	1.13In		≤1h		30°C+5°C	3In		≥0.1	Normal temperature
			1.45In		<1h			5In	<0.1	
C	6-63A	1.13In		≤1h		30°C+5°C	5In		≥0.1	Normal temperature
			1.45In		<1h			10In	<0.1	

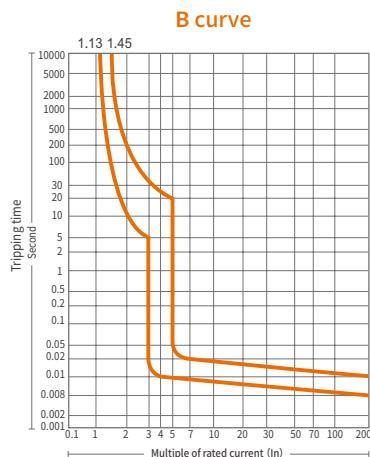

Universal use  
- socket outlet, lighting device

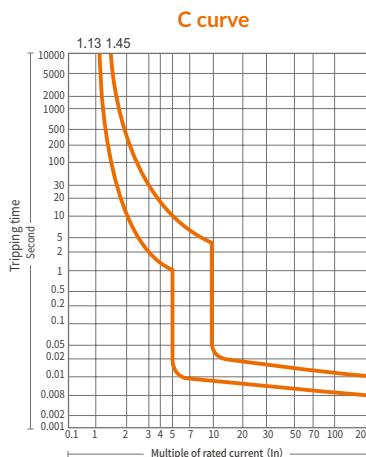

Resistive & inductive loads with low inrush current  
- lamp, high starting current motor

## Temperature Derating Table

Rated current (A)	Correction factor for ambient temperature											
	-40°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
6	8	7.7	7.5	7.2	6.9	6.6	6.3	6	5.7	5.3	4.9	4.5
10	13.3	12.9	12.5	12	11.5	11.1	10.5	10	9.4	8.8	8.2	7.5
16	21.3	20.7	20	19.2	18.5	17.7	16.9	16	15.1	14.1	13.1	11.9
20	26.7	25.8	24.9	24	23.1	22.1	21.1	20	18.9	17.6	16.3	14.9
25	33.3	32.3	31.2	30	28.9	27.6	26.4	25	23.6	22	20.4	18.6
32	42.7	41.3	39.9	38.5	37	35.4	33.7	32	30.2	28.2	26.1	23.9
40	53.3	51.6	49.9	48.1	46.2	44.2	42.2	40	37.7	35.3	32.7	29.8
50	66.7	64.5	62.4	60.1	57.7	55.3	52.7	50	47.1	44.1	40.8	37.3
63	84	81.3	78.6	75.7	72.7	69.6	66.4	63	59.4	55.6	51.4	47


## Limit values of operating criteria for AFDD at low arc currents up to 63A (IEC62026)

Limit values of break time for Ue 230V AFDD	
Test arc current (r.m.s.values)	Max breaking time
2.5A	1S
5A	0.5S
10A	0.25S
16A	0.15S
32A	0.12S
63A	0.12S



Note:

1. The test arc current is the expected current before ignition occurs in the test circuit.
  2. Low arc currents can occur due to insulation faults phase to earth or series arcing.


## ■ Led Indicator Instruction

No.	Led display state	color	Description
1	Green light steady on		After closing, it indicates the system status and working mode. Green light steady on means the product is operating normally.
2	Red light steady on		After the product trips, when reclosed, the red light flashes first and then remains steady on, indicating arc self-test failure (hardware or software malfunction).
3	Red light flashing		When the product trips due to arc detection and is reclosed, the red light flashes 5 times, then switches to green light steady on. This indicates the previous trip was caused by an arc fault, and green light steady on means the product has resumed normal operation.
4	Green light steady on		With the green light steady on, pressing the test button will trip the device. When reclosed, green light steady on indicates normal functionality.

## Wiring Diagram

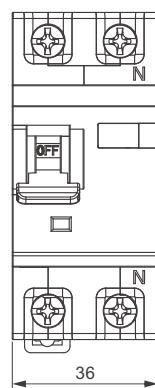

## ■ Dimension (mm)

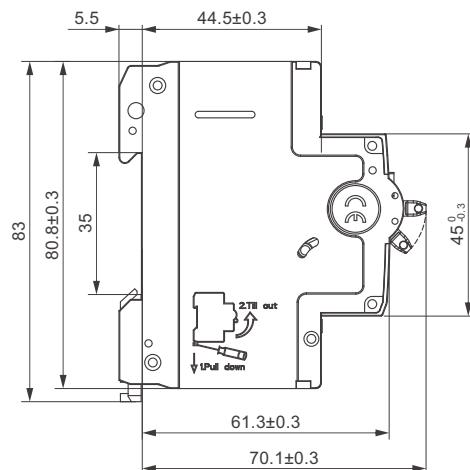

# ETD1-125

Isolator Switch

CE UK CA



#### IP20 protection

Finger protected connection terminals.

#### Contact position indication

Reliable recognition of the switching status through red/green position indicating device.

#### Standard

IEC 60947-3: Low-voltage switchgear and controlgear -Part 3.

#### RoHS compliant

ETEK uses environmentally friendly state-of-the-art housing material. With the latest generation of halogen free thermoplastics for isolator switch, it is now possible to recycle the isolator switch completely which reduces environmental pollution. T Series entire range of circuit protection devices conform to RoHS Standards.

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment



Electrical safety assurance in public facilities

## ■ Overview

ETD1-125 Isolators, designed for circuits up to 125A, are manually operated switch disconnectors capable of making, carrying, and breaking current under normal circuit conditions, while maintaining short-circuit current withstand capacity for specified durations.

These devices ensure safe circuit de-energization for maintenance/service operations and serve as reliable Main Switch for enclosures, distribution boards, or consumer units.

## ■ Product Tips



1 Reversible line and load connection

3 Rated current up to 125A

2 The position of handle lock

4 Contacts position indication window

## Technical Data

Standard	IEC/EN 60947-3
Method of operation	Dependent manual operation
No. of poles	1P, 2P, 3P, 4P
Insulation voltage (Ui)	500V
Rated voltage (Ue)	220/230/240V and 380/400/415V for 1P 380/400/415V for 2P/3P/4P
Rated frequency	50/60Hz
Rated currents (In)	25,32,40,50,63,80,100,125A
Utilization category	AC-22A
Short-time withstand current (Icw)	2500A/1s
Rated short-circuit making capacity (Icm)	3000A (declared)
Rated impulse withstand voltage (Uimp) (1.2/50μs)	6kV
Dielectric test voltage	2kV (50/60Hz, 1 min.)
Fire resistance (glow-wire test)	960±15°C (Enclosure) 650±10°C (Handle)
Electrical life	2000 cycles
Mechanical life	1,0000 cycles
Contact position indicator	green OFF / red ON
Protection degree	IP20 for front cover
Ambient temperature	-5°C ~ +40°C
Storage temperature	-25°C ~ +70°C
Terminal connection type	Cable / Pin-type busbar
Max. terminal size for cable	35mm <sup>2</sup> flexible/ 50mm <sup>2</sup> rigid
Max. tightening torque	3.5N.m
Installation	Mounting on 35mm DIN rail
Incoming method	Bi-directional


## Utilization Categories for Low Voltage Switchgear According to IEC60947-3

Current	Utilization categories		Typical application
	Category A	Category B	
AC	AC-20A	AC-20B	Connecting and disconnecting under no-load conditions
	AC-21A	AC-21B	Switching of resistive loads including moderate overloads
	AC-22A	AC-22B	Switching of mixed resistive and inductive loads, including moderate overloads
	AC-23A	AC-23B	Switching of motor loads or other highly inductive loads
	AC-23Ae	AC-23Be	Switching of motor loads with higher locked rotor currents
DC	DC-20A	DC-20B	Connecting and disconnecting under no-load conditions
	DC-21A	DC-21B	Switching of resistive loads including moderate overloads
	DC-22A	DC-22B	Switching of mixed resistive and inductive loads, including moderate overloads (e.g. shunt motors)
	DC-23A	DC-23B	Switching of highly inductive loads (e.g. series motors)



## ■ Wiring Capacity

Rated current In (A)	Cross section area s (mm <sup>2</sup> )	Tightening torque (N.m)
25	4	3.5
32	6	3.5
40	10	3.5
50	10	3.5
63	16	3.5
80	35	3.5
100	35	3.5
125	50	3.5

## ■ Wiring Diagram

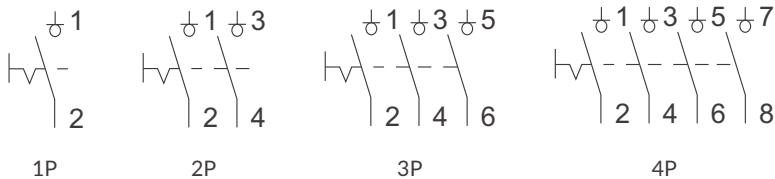

## ■ Dimension (mm)

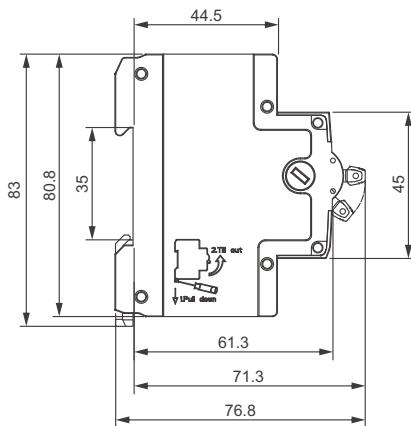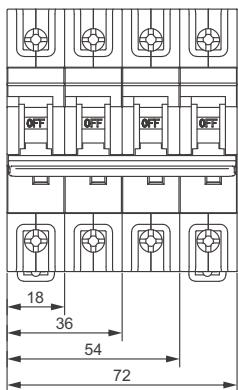

# ETD1-125M/L

Dual Screw Mains Isolator Switches



ETD1-125M



ETD1-125L



## IP20 protection

Finger protected connection terminals.

## Dual screw terminals

Dual screw terminals ensure maximum conductor clamping reliability.

## Standard

IEC 60947-3: Low-voltage switchgear and controlgear -Part 3.

## Contact position indication

Reliable recognition of the switching status through red/green position indicating device.

## RoHS compliant

ETEK uses environmentally friendly state-of-the-art housing material. With the latest generation of halogen free thermoplastics for isolator switch, it is now possible to recycle the isolator switch completely which reduces environmental pollution. T Series entire range of circuit protection devices conform to RoHS Standards.

## Applications



Main circuit protection in residential distribution systems



Lighting circuit control in commercial buildings



Power supply line protection for industrial equipment



Electrical safety assurance in public facilities

## Overview

ETD1-125 Dual Screw Mains Isolator Switches are designed to provide secure, reliable conductor clamping and safe circuit isolation in both domestic consumer units and three-phase distribution boards. With a compact footprint, they integrate easily into electrical enclosures and consumer units, delivering dependable performance in single-phase and three-phase applications wherever complete circuit isolation is required.


Two versions are available to suit different wiring requirements:

ETD1-125M - Dual screw terminals on the load side for enhanced security of outgoing connections.

ETD1-125L - Dual screw terminals on both line and load sides for maximum clamping reliability on both incoming and outgoing conductors.

Compliant with IEC 60947-3, the series offers rated currents up to 125 A and is available in 1P, 2P, 3P, and 4P configurations, making it a versatile solution for a wide range of low-voltage distribution systems.

## Product Tips

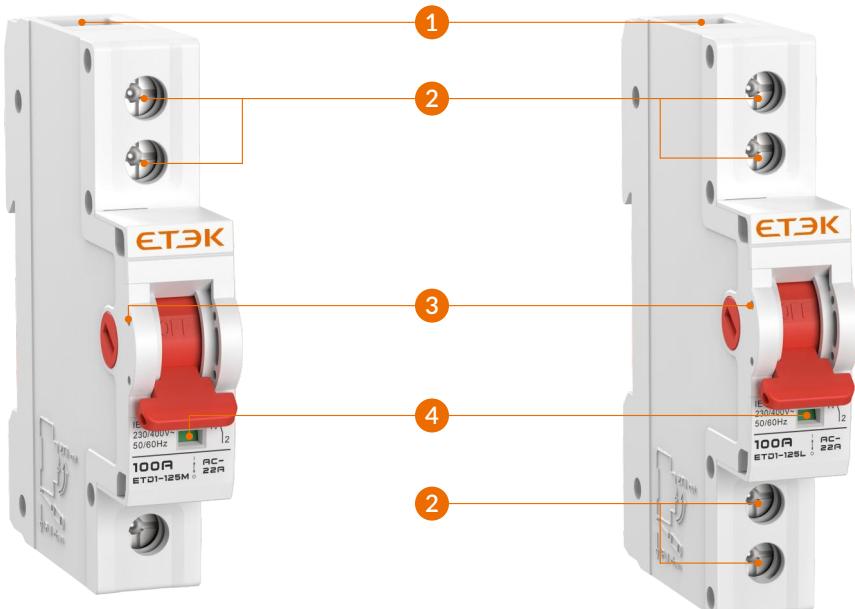

1 Reversible line and load connection

2 Dual screw terminals

3 The position of handle lock

4 Contacts position indication window

**Technical Data**

Model	ETD1-125M	ETD1-125L
Terminal configuration	Line side terminals	Single-screw
	Load side terminals	Dual-screw
Standard	IEC/EN 60947-3	
Method of operation	Dependent manual operation	
No. of poles	1P, 2P, 3P, 4P	
Insulation voltage (Ui)	500V	
Rated voltage (Ue)	220/230/240V and 380/400/415V for 1P	
	380/400/415V for 2P/3P/4P	
Rated frequency	50/60Hz	
Rated currents (In)	25,32,40,50,63,80,100,125A	
Utilization category	AC-22A	
Short-time withstand current (Icw)	2500A/1s	
Rated short-circuit making capacity (Icm)	3000A (declared)	
Rated impulse withstand voltage (Uimp) (1.2/50μs)	6kV	
Dielectric test voltage	2kV (50/60Hz, 1 min.)	
Fire resistance (glow-wire test)	960±15°C (Enclosure)	
	650±10°C (Handle)	
Electrical life	2000 cycles	
Mechanical life	1,0000 cycles	
Contact position indicator	green OFF / red ON	
Protection degree	IP20 for front cover	
Ambient temperature	-5°C ~ +40°C	
Storage temperature	-25°C ~ +70°C	
Terminal connection type	Cable / Pin-type busbar	
Max. terminal size for cable	35mm <sup>2</sup> flexible/ 50mm <sup>2</sup> rigid	
Max. tightening torque	3.5N.m	
Installation	Mounting on 35mm DIN rail	
Incoming method	Bi-directional	


## Utilization Categories for Low Voltage Switchgear According to IEC60947-3

Current	Utilization categories		Typical application
	Category A	Category B	
AC	AC-20A	AC-20B	Connecting and disconnecting under no-load conditions
	AC-21A	AC-21B	Switching of resistive loads including moderate overloads
	AC-22A	AC-22B	Switching of mixed resistive and inductive loads, including moderate overloads
	AC-23A	AC-23B	Switching of motor loads or other highly inductive loads
	AC-23Ae	AC-23Be	Switching of motor loads with higher locked rotor currents
DC	DC-20A	DC-20B	Connecting and disconnecting under no-load conditions
	DC-21A	DC-21B	Switching of resistive loads including moderate overloads
	DC-22A	DC-22B	Switching of mixed resistive and inductive loads, including moderate overloads (e.g. shunt motors)
	DC-23A	DC-23B	Switching of highly inductive loads (e.g. series motors)

## Wiring Capacity



Rated current In (A)	Cross section area s (mm <sup>2</sup> )	Tightening torque (N.m)
25	4	3.5
32	6	3.5
40	10	3.5
50	10	3.5
63	16	3.5
80	35	3.5
100	35	3.5
125	50	3.5

## Wiring Diagram


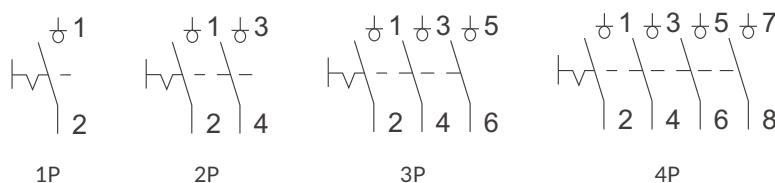


## Dimension (mm)

ETD1-125M

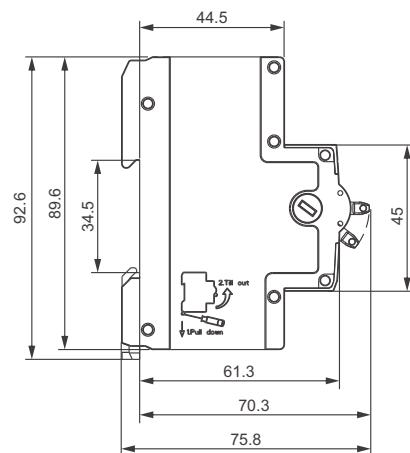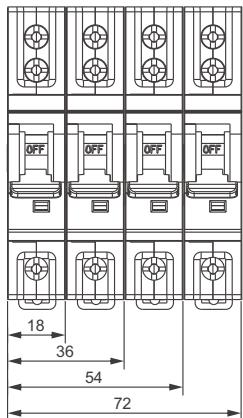

ETD1-125L

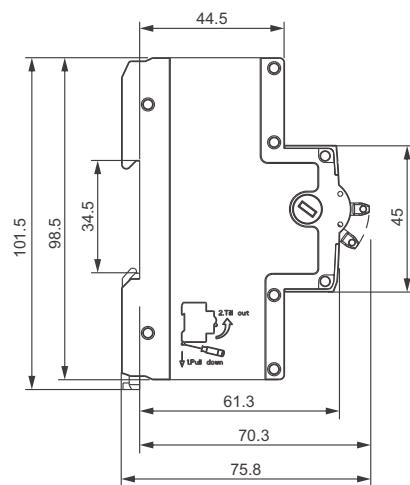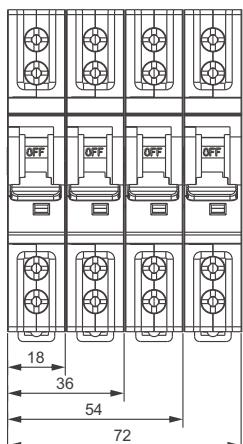





1. Circuit breaker body  
 2. ETM-TZ mechanical interlock  
 3. ETM-MV+MN over-undervoltage release  
     ETM-MN undervoltage release  
     ETM-MV overvoltage release  
     ETM-MNs voltage loss release  
 4. ETM-MX+OF shunt release and auxiliary contact  
     ETM-MX shunt release  
 5. ETM-OF auxiliary contact  
     ETM-FB auxiliary and alarm contact

Abbreviation	Accessory	Description	Typical Applications
OF	Auxiliary contact	Provides status feedback of the circuit breaker (ON/OFF) to monitoring or control systems.	Automation and monitoring systems requiring real-time feedback on circuit breaker status.
FB	Auxiliary contact + Alarm contact	Combines the functionality of auxiliary contact (OF) and alarm contact (SD) in a single unit	Used in systems that require both real-time status feedback and fault alarming.
MX	Shunt release	Allows remote circuit breaker tripping via an external electrical signal (e.g., emergency stop).	Emergency stop systems, electrical fire safety systems, and remote disconnection.
MX+OF	Shunt release + Auxiliary contact	Combines shunt trip functionality with status feedback for remote control and status indication.	Complex automation systems requiring control and feedback mechanisms.
MN	Undervoltage release	Automatically trips the circuit breaker when the supply voltage drops below a preset threshold (undervoltage condition).	Protects equipment and circuits from operating under insufficient voltage conditions.
MV	Overvoltage release	Automatically trips the circuit breaker when the voltage exceeds a preset upper limit (overvoltage threshold).	Protection of equipment and circuits from damage caused by excessive voltage levels.
MV+MN	Over-undervoltage release	Protects the circuit by tripping the breaker when the voltage either exceeds a set upper limit (overvoltage) or falls below a preset lower limit (undervoltage).	Ensures the safety of voltage-sensitive equipment in unstable power supply conditions.
MNs	Voltage loss release	Automatically trips the circuit breaker when the supply voltage drops below a certain threshold or is lost entirely.	Protection of voltage-sensitive equipment, prevention of low-voltage operation, and avoiding unintended startups.
TZ	Mechanical interlock	Composed of two-stage (multi - stage) circuit breaker and interlock conversion accessories.	It is mainly used two main circuits cannot work at the same time.

## Installation

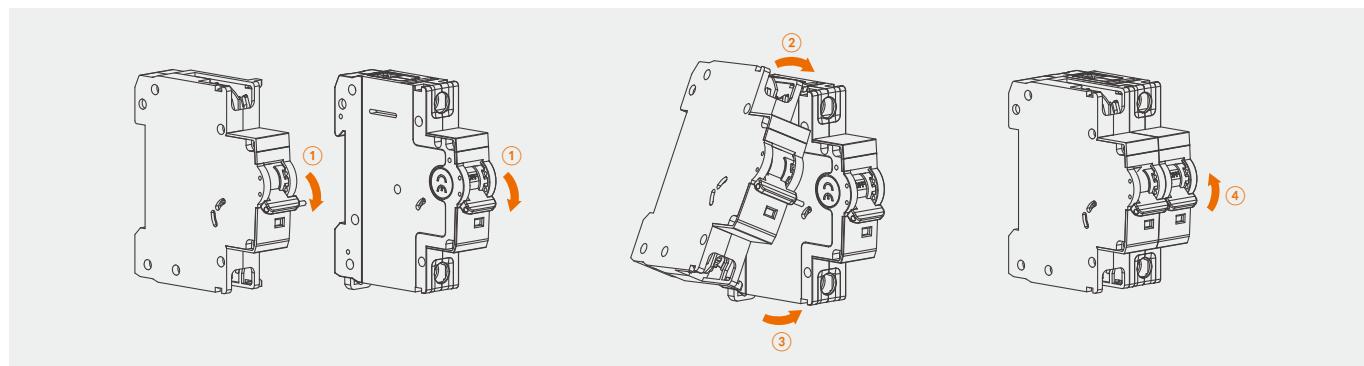


### ■ ETM-OF Auxiliary Contact




Model	ETM-OF	
Standard	IEC/EN 60947-5-1	
Number of contacts	1NO+1NC	
Rated voltage (Ue)	AC-13	230~400 VAC
	AC-15	230~400 VAC
	DC-12	24~110 VDC
Operating current (Ie)	AC-13	3A@230V, 2A@400V
	AC-15	2A@230V, 1A@400V
	DC-12	0.5A≤110 VDC
Operating frequency	50/60Hz	
Rated insulation voltage (Ui)	400V	
Rated impulse withstand voltage (Uimp)	2.5kV	
Pollution degree	2	
Terminal type	Lug type	
Terminal capacity	Up to 2.5mm <sup>2</sup>	
Tightening torque	0.8 N.m	
Ambient temperature	-5°C ~ +40°C	
Storage temperature	-25°C ~ +70°C	
Product width	9mm	
Compatible product	T Series MCB, RCBO	

### ■ ETM-FB Auxiliary and Alarm Contact




Model	ETM-FB	
Standard	IEC/EN 60947-5-1	
Number of contacts	2NO+2NC	
Rated voltage (Ue)	AC-13	230~400 VAC
	AC-15	230~400 VAC
	DC-12	24~110 VDC
Operating current (Ie)	AC-13	3A@230V, 2A@400V
	AC-15	2A@230V, 1A@400V
	DC-12	0.5A≤110 VDC
Operating frequency	50/60Hz	
Rated insulation voltage (Ui)	400V	
Rated impulse withstand voltage (Uimp)	2.5kV	
Pollution degree	2	
Terminal type	Lug type	
Terminal capacity	Up to 2.5mm <sup>2</sup>	
Tightening torque	0.8 N.m	
Ambient temperature	-5°C ~ +40°C	
Storage temperature	-25°C ~ +70°C	
Product width	9mm	
Compatible product	T Series MCB, RCBO	

### ■ ETM-MX Shunt Release




Model	ETM-MX-48	ETM-MX-400
Standard	IEC/EN 60947-5-1	
Rated voltage (Ue)	AC/DC 24~48V	24~48V 110~400V
Operating frequency	50/60Hz	
Rated insulation voltage (Ui)	400V	
Rated impulse withstand voltage (Uimp)	2.5kV	
Pollution degree	2	
Mechanical state indicator	Yes	
Terminal type	Lug type	
Terminal capacity	Up to 2.5mm <sup>2</sup>	
Tightening torque	0.8 N.m	
Ambient temperature	-5°C ~ +40°C	
Storage temperature	-25°C ~ +70°C	
Product width	18mm	
Compatible product	T Series MCB, RCBO	

### ■ ETM-MX+OF Shunt Release and Auxiliary Contact




Model	ETM-MX+OF-48	ETM-MX+OF-400
Standard	IEC/EN 60947-5-1	
Number of contacts	1NO+1NC	
Rated voltage (Ue)	AC/DC 24~48V	24~48V 110~400V
Operating frequency	50/60Hz	
Rated insulation voltage (Ui)	400V	
Rated impulse withstand voltage (Uimp)	2.5kV	
Pollution degree	2	
Mechanical state indicator	Yes	
Terminal type	Lug type	
Terminal capacity	Up to 2.5mm <sup>2</sup>	
Tightening torque	0.8 N.m	
Ambient temperature	-5°C ~ +40°C	
Storage temperature	-25°C ~ +70°C	
Product width	18mm	
Compatible product	T Series MCB, RCBO	

### ■ ETM-MNs Voltage Loss Release




Model	ETM-MNs
Standard	IEC/EN 60947-5-1
Rated voltage (Ue)	230 VAC
Operating frequency	50/60Hz
Undervoltage protection interval	(35%~70%)Ue
Normal recovery voltage	$\geq 85\%Ue$
Rated insulation voltage (Ui)	400V
Rated impulse withstand voltage (Uimp)	2.5kV
Pollution degree	2
Reset function	Yes
Mechanical state indicator	Yes
Terminal type	Lug type
Terminal capacity	Up to 2.5mm <sup>2</sup>
Tightening torque	0.8 N.m
Ambient temperature	-5°C ~ +40°C
Storage temperature	-25°C ~ +70°C
Product width	18mm
Compatible product	T Series MCB, RCBO

### ■ ETM-MV Over-voltage Release




Model	ETM-MV
Standard	IEC/EN 60947-5-1
Rated voltage (Ue)	230 VAC
Operating frequency	50/60Hz
Rated working trip undervoltage	280V±5%
Rated insulation voltage (Ui)	400V
Rated impulse withstand voltage (Uimp)	2.5kV
Pollution degree	2
Mechanical state indicator	Yes
Terminal type	Lug type
Terminal capacity	Up to 2.5mm <sup>2</sup>
Tightening torque	0.8 N.m
Ambient temperature	-5°C ~ +40°C
Storage temperature	-25°C ~ +70°C
Product width	18mm
Compatible product	T Series MCB, RCBO




### ETM-MN Undervoltage Release

Model	ETM-MN
Standard	IEC/EN 60947-5-1
Rated voltage (Ue)	230 VAC
Operating frequency	50/60Hz
Rated working trip undervoltage	170V±5%
Rated insulation voltage (Ui)	400V
Rated impulse withstand voltage (Uimp)	2.5kV
Pollution degree	2
Mechanical state indicator	Yes
Terminal type	Lug type
Terminal capacity	Up to 2.5mm <sup>2</sup>
Tightening torque	0.8 N.m
Ambient temperature	-5°C ~ +40°C
Storage temperature	-25°C ~ +70°C
Product width	18mm
Compatible product	T Series MCB, RCBO



### ETM-MV+MN Over-undervoltage Release





Model	ETM-MV+MN
Standard	IEC/EN 60947-5-1
Rated voltage (Ue)	230 VAC
Operating frequency	50/60Hz
Rated working trip overvoltage	280V±5%
Rated working trip undervoltage	170V±5%
Rated insulation voltage (Ui)	400V
Rated impulse withstand voltage (Uimp)	2.5kV
Pollution degree	2
Mechanical state indicator	Yes
Terminal type	Lug type
Terminal capacity	Up to 2.5mm <sup>2</sup>
Tightening torque	0.8 N.m
Ambient temperature	-5°C ~ +40°C
Storage temperature	-25°C ~ +70°C
Product width	18mm
Compatible product	T Series MCB, RCBO

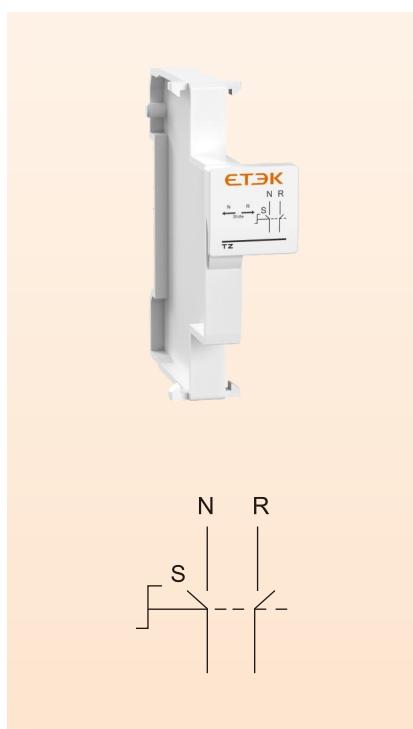

### ETM-TZ Mechanical Interlock



Model	ETM-TZ
Standard	IEC/EN 60947-5-1
Poles	1P
Mechanical interlock	Manual switching of dual power supply
Assembly method	Between two or more stage circuit breakers
Pollution degree	2
Installation category	Class II and III
Ambient temperature	-5°C ~ +40°C
Storage temperature	-25°C ~ +70°C
Product width	22.5mm
Compatible product	T Series MCB

### Dimension (mm)

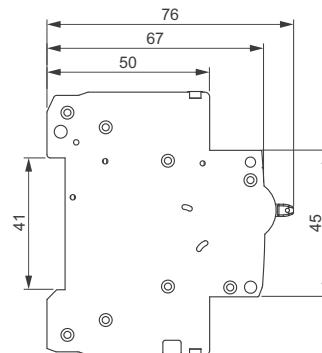



ETM-TZ

ETM-OF/FB

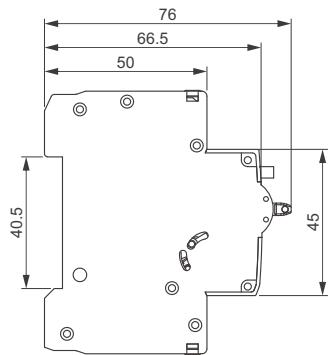

ETM-MX/MX+OF/MV/MN/MV+MN

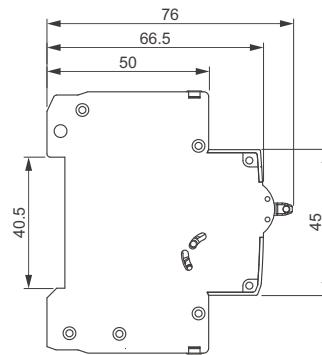

ETM-MNs

# ETMC

Modular Contactor



## Automatic type



## Manual type




## Overview

ETMC modular contactors operate on AC 50/60 Hz up to 400 V and 63 A. They switch low-inductive or household motor loads (with derating) and meet IEC/EN 61095 and IEC 60947-4-1 standards. Commonly used for lighting, heating, ventilation, and pumps, they easily mount on DIN rails in panels and boards.

To meet diverse application needs, ETMC contactors are available in both automatic-control and manual-control versions. Their exterior design and dimensions are aligned with the T Series circuit protection products, ensuring a unified appearance and seamless side-by-side installation for consistent panel aesthetics and layout.

## Product Tips

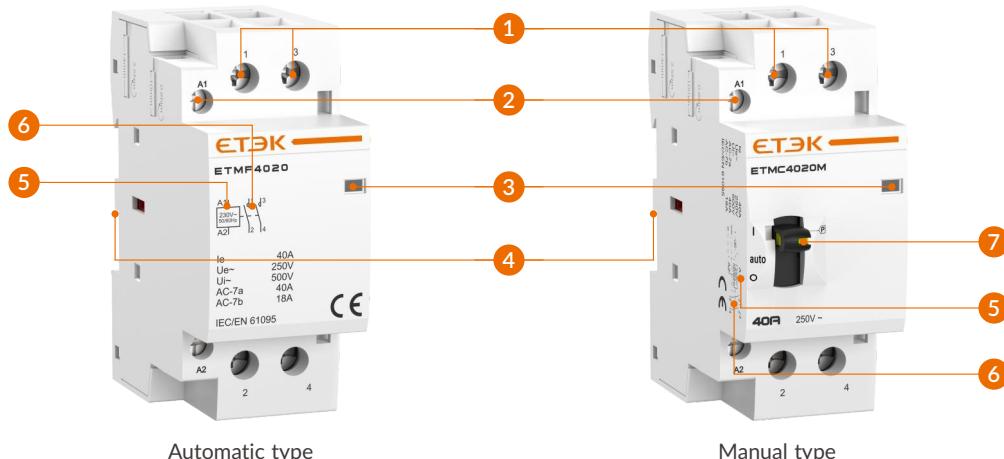

① Main pole terminals

② Coil control terminals

③ Easy status indication

④ DIN mounting

⑤ Coil input


⑥ Main contacts output

⑦ Selector

The three-position manual selector has the following functions:

- "O" position, the control power on/off, contactor does not act;
- "auto" position, the contactor switch on/off is control by control power on/off just like the normal contactor;
- "I" position, the contactor switch on immediately, and the handle automatically returns to the "auto" position after the control power from off to on;
- "I+P" position, use a screwdriver to push out the white pin key a "P" position, the contactor is switch on and not acted by the control power on/off.

Manual Operation Diagram

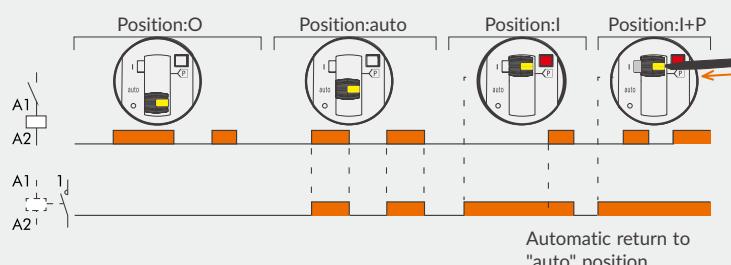






## Product Selection Guide

























E	T	MC	-	25	11	M	-	230
①	②	③	④	⑤	⑥	⑦		
①	ETEK							
②	T series							
③	Modular contactor							
④	Rated current 16: 16A 20: 20A 25: 25A, 32: 32A 40: 40A 63: 63A							
⑤	Contact type 10: 1NO 01: 1NC 20: 2NO 02: 2NC 11: 1NO+1NC 30: 3NO 03: 3NC 40: 4NO 04: 4NC 22: 2NO+2NC, 31: 3NO+1NC							
⑥	Operation type None: Automatic type M: Manual type							
⑦	Coil voltage 24: 24VAC 110: 110VAC, 230: 230VAC 380: 380VAC							

## Technical Data





























Standard			IEC/EN 61095, IEC/EN 60947-4-1							
Model			ETMC-16	ETMC-20	ETMC-25	ETMC-32	ETMC-40	ETMC-63		
Rated current In (A)	AC-7a		16	20	25	32	40	63		
	AC-7b		6	7	9	12	18	25		
Conventional thermal current Ith (A)			25	25	25	63	63	63		
Control modes			Automatic / Manual							
Rated insulation voltage Ui (V)			500							
Rated operation voltage Ue (V)			250 (1P/2P), 400 (3P/4P)							
Number of main contacts	1P		1NO, 1NC							
	2P		1NO+1NC, 2NO, 2NC							
	3P		3NO, 3NC							
	4P		4NO, 4NC, 2NO+2NC, 3NO+1NC							
Product power (230V)	1P	Release	2.8VA	2.8VA	2.8VA	/	/	/		
		Operating	11.5VA	11.5VA	11.5VA	/	/	/		
	2P	Release	2.8VA	2.8VA	2.8VA	4.1VA	4.1VA	4.1VA		
		Operating	11.5VA	11.5VA	11.5VA	31VA	31VA	31VA		
	3P	Release	4.1VA	4.1VA	4.1VA	7VA	7VA	7VA		
		Operating	31VA	31VA	31VA	48VA	48VA	48VA		
	4P	Release	4.1VA	4.1VA	4.1VA	7VA	7VA	7VA		
		Operating	31VA	31VA	31VA	48VA	48VA	48VA		
Control power(kW)	AC-7a	250V	3.5	4.5	5.5	8	9	14		
		400V	6	7.5	9.5	12	15	24		
	AC-7b	250V	1.4	1.6	2	3	4	5.5		
		400V	2.2	2.5	3.2	4.5	6	8		
Heat loss (W)			1.2	1.2	1.2	1.6	2.1	2.1		
Rated control power voltage (Us)			24/110/230VAC (1P/2P), 24/110/230/380VAC (3P/4P)							
Electrical life (times)			10 x 10 <sup>4</sup>							
Mechanical life (times)			10 x 10 <sup>5</sup>							
Rated impulse withstand voltage (Uiimp)			4kV							
Pollution degree			2							
Protection level			IP20							
Ambient temperature			-5°C ~ +50°C							
Storage temperature			-40°C ~ +70°C							
Installation			Mounting on 35mm DIN rail							
Wiring capacity	Control circuit	Hard wire	1.5~2.5mm <sup>2</sup>							
		Flexible wire	1.5~6mm <sup>2</sup>							
	Power circuit	Hard wire	1.5~4mm <sup>2</sup>		6~16mm <sup>2</sup>					
		Flexible wire	1.5~6mm <sup>2</sup>		6~25mm <sup>2</sup>					
Torque (N.m)	Control circuit		0.8							
	Power circuit		0.8		3.5					

























## Automatic Type Product Selection Form

Width	Coil voltage VAC	Poles	Contacts NO+NC	Contactor model	Circuit diagram
 1 Modules	24 110 230	1P	1NO	ETMC-1610	
				ETMC-2010	
				ETMC-2510	
			1NC	ETMC-1601	
				ETMC-2001	
				ETMC-2501	
		2P	2NO	ETMC-1620	
				ETMC-2020	
				ETMC-2520	
			1NO+1NC	ETMC-1611	
				ETMC-2011	
				ETMC-2511	
		3P	2NC	ETMC-1602	
				ETMC-2002	
				ETMC-2502	
			3NO	ETMC-1630	
				ETMC-2030	
				ETMC-2530	
		4P	3NC	ETMC-1603	
				ETMC-2003	
				ETMC-2503	
			4NO	ETMC-1640	
				ETMC-2040	
				ETMC-2540	
		2 Modules	4NC	ETMC-1604	
				ETMC-2004	
				ETMC-2504	
			2NO+2NC	ETMC-1622	
				ETMC-2022	
				ETMC-2522	
			3NO+1NC	ETMC-1631	
				ETMC-2031	
				ETMC-2531	

Width	Coil voltage VAC	Poles	Contacts NO+NC	Contactor model	Circuit diagram
 2 Modules	24 110 230	1P	1NO	ETMC-3210	
				ETMC-4010	
				ETMC-6310	
			1NC	ETMC-3201	
				ETMC-4001	
				ETMC-6301	
		2P	2NO	ETMC-3220	
				ETMC-4020	
				ETMC-6320	
			1NO+1NC	ETMC-3211	
				ETMC-4011	
				ETMC-6311	
		3P	2NC	ETMC-3202	
				ETMC-4002	
				ETMC-6302	
			3NO	ETMC-3230	
				ETMC-4030	
				ETMC-6330	
		4P	3NC	ETMC-3203	
				ETMC-4003	
				ETMC-6303	
			4NO	ETMC-3240	
				ETMC-4040	
				ETMC-6340	
		5P	4NC	ETMC-3204	
				ETMC-4004	
				ETMC-6304	
			2NO+2NC	ETMC-3222	
				ETMC-4022	
				ETMC-6322	
		6P	3NO+1NC	ETMC-3231	
				ETMC-4031	
				ETMC-6331	


## Manual Type Product Selection Form

Width	Coil voltage VAC	Poles	Contacts NO+NC	Contactor model	Circuit diagram
1 Modules	24 110 230	1P	1NO	ETMC-1610M	
				ETMC-2010M	
				ETMC-2510M	
			1NC	ETMC-1601M	
				ETMC-2001M	
				ETMC-2501M	
	2P	2NO	ETMC-1620M		
			ETMC-2020M		
			ETMC-2520M		
		1NO+1NC	ETMC-1611M		
			ETMC-2011M		
			ETMC-2511M		
		2NC	ETMC-1602M		
			ETMC-2002M		
			ETMC-2502M		
2 Modules	24 110 230 380	3P	3NO	ETMC-1630M	
				ETMC-2030M	
				ETMC-2530M	
		3NC	ETMC-1603M		
			ETMC-2003M		
			ETMC-2503M		
		4P	4NO	ETMC-1640M	
				ETMC-2040M	
				ETMC-2540M	
		4NC	ETMC-1604M		
			ETMC-2004M		
			ETMC-2504M		
		2NO+2NC	ETMC-1622M		
			ETMC-2022M		
			ETMC-2522M		
		3NO+1NC	ETMC-1631M		
			ETMC-2031M		
			ETMC-2531M		

Width	Coil voltage VAC	Poles	Contacts NO+NC	Contactor model	Circuit diagram
 2 Modules	24 110 230	2P	2NO	ETMC-3220M	
				ETMC-4020M	
				ETMC-6320M	
			1NO+1NC	ETMC-3211M	
				ETMC-4011M	
				ETMC-6311M	
			2NC	ETMC-3202M	
				ETMC-4002M	
				ETMC-6302M	
 3 Modules	24 110 230 380	3P	3NO	ETMC-3230M	
				ETMC-4030M	
				ETMC-6330M	
			3NC	ETMC-3203M	
				ETMC-4003M	
				ETMC-6303M	
			4NO	ETMC-3240M	
				ETMC-4040M	
				ETMC-6340M	
			4NC	ETMC-3204M	
				ETMC-4004M	
				ETMC-6304M	
			2NO+2NC	ETMC-3222M	
				ETMC-4022M	
				ETMC-6322M	
			3NO+1NC	ETMC-3231M	
				ETMC-4031M	
				ETMC-6331M	


## Auxiliary Contact





Model	OF-11	OF-20
Number of contacts	1NO+1NC	2NO
Rated insulation voltage Ui (V)	500	
Rated impulse voltage (Uimp)	4kV	
Usage category	AC-12 AC-15 DC-13	240V/5A 230V/2A 130V/1A
Wiring capacity	Flexible wire	1.5~6mm <sup>2</sup>
	Hard wire	1.5~6mm <sup>2</sup>
Circuit diagram		

## Dimension (mm)

### Automatic type


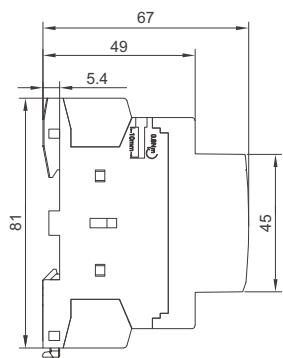


ETMC-16/20/25

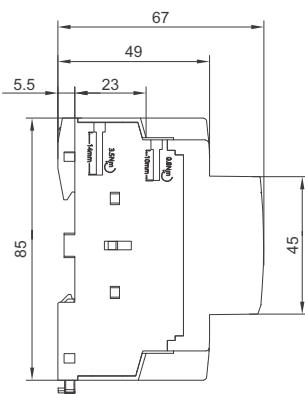



ETMC-32/40/63

### Manual type

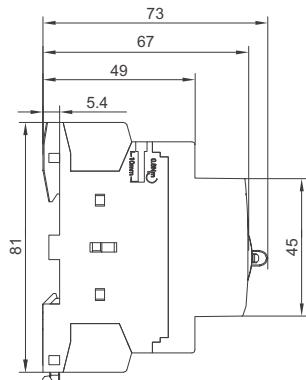


ETMC-16M/20M/25M

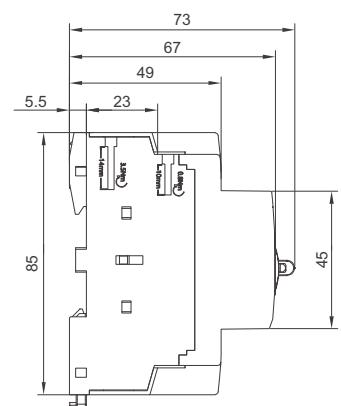

ETMC-32M/40M/63M

### Auxiliary Contact



OF

# ETLR-16

Modular Impulse Relay

CE




## Overview


ETLR-16 Modular Impulse Relays are bistable, latching devices engineered for dependable load control, especially in lighting applications. Each momentary pulse cleanly toggles the contact state, enabling centralized or distributed control from any number of push buttons. With zero holding power, ETLR relays minimize standby consumption and preserve the selected state through power interruptions for efficient, reliable operation.

Rated at 16 A and available in a complete range of AC and DC variants, ETLR relays integrate easily into both new installations and retrofit projects. Their exterior design and dimensions align with T Series circuit protection products, enabling seamless side-by-side installation and delivering a unified, consistent panel aesthetic and layout.

## Product Tips

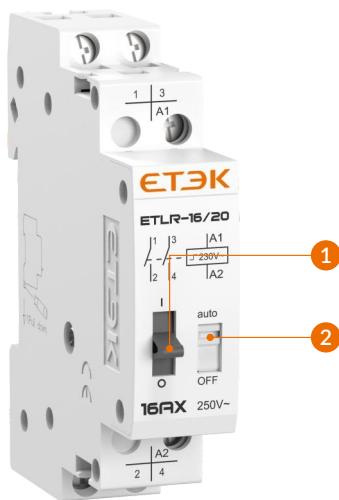

- 1 • Manual controls on front face: direct and priority manual control by O-I toggle
  - Mechanical contact position indicator
- 2 • Disconnection of remote control by selector switch (except for 4P single-piece ETLR) for maintenance operation

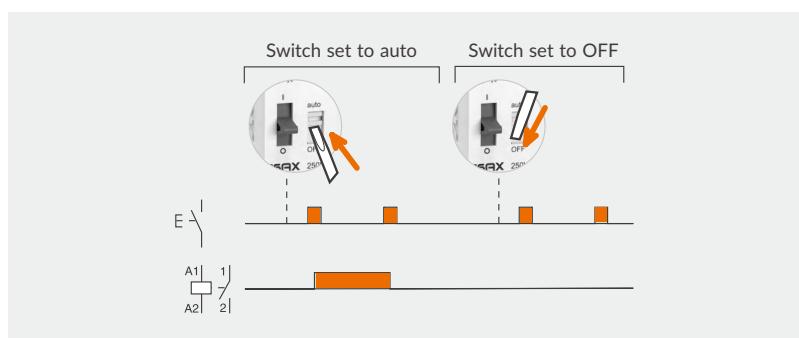

**Technical Data**


Standard	IEC/EN 61095, IEC/EN 60947-4-1									
Control type	Remote and manual control coil disconnection									
Control signal type	Impulse									
Rated current (In)	16A									
Dissipated power (during the impulse)	19VA									
Rated operation voltage (Ue)	24~250VAC									
Control voltage (Us)	VAC		12	24	48	130				
	VDC		6	12	24	48				
Control voltage operating range	(85%~110%) Us									
Contact configuration	Standard	1 Modules	1NO, 2NO, 1NO+1NC							
		2 Modules	3NO, 4NO, 2NO+1NC, 2NO+2NC, 3NO+1NC							
	Changeover	1 Modules	1C							
		2 Modules	2C							
Rated frequency	50/60Hz									
Rated insulation voltage (Ui)	500V									
Rated impulse withstand voltage (Uimp)	4kV									
Frequency of action	$\leq 5$ times/min									
Impulse duration	50ms...1s									
Local signaling	ON/OFF indication									
Electrical life (times)	$1\times 10^5$									
Mechanical life (times)	$2\times 10^5$									
Pollution degree	2									
Protection level	IP20									
Ambient temperature	-5°C ~ +50°C									
Storage temperature	-40°C ~ +70°C									
Installation	Mounting on 35mm DIN rail									
Wiring capacity	Control circuit	Hard wire	0.5~4mm <sup>2</sup>							
		Flexible wire	1~4mm <sup>2</sup>							
	Power circuit	Hard wire	1.5~4mm <sup>2</sup>							
		Flexible wire	1.5~4mm <sup>2</sup>							
Torque (N.m)	Control circuit		1N.m							
	Power circuit		1N.m							

**Product Selection Form**

Model	Contact	Control voltage	Ref. No	Width (In 18 mm modules)	Circuit diagram
		VAC	VDC		
ETLR-16/10	1NO	230	110	1	
		130	48		
		48	24		
		24	12		
		12	6		
ETLR-16/20	2NO	230	110	1	
		130	48		
		48	24		
		24	12		
		12	6		
ETLR-16/11	1NO+1NC	230	110	1	
		130	48		
		48	24		
		24	12		
		12	6		
ETLR-16/1C	1 Changeover	230	110	1	
		130	48		
		48	24		
		24	12		
		12	6		
ETLR-16/30	3NO	230	110	2	
		130	48		
		48	24		
		24	12		
		12	6		
ETLR-16/40	4NO	230	110	2	
		130	48		
		48	24		
		24	12		
		12	6		
ETLR-16/21	2NO+1NC	230	110	2	
		130	48		
		48	24		
		24	12		
		12	6		

Model	Contact	Control voltage		Ref. No	Width (In 18 mm modules)	Circuit diagram
		VAC	VDC			
ETLR-16/22	2NO+2NC	230	110	ETLR-1622-230/110	2	
		130	48	ETLR-1622-130/48		
		48	24	ETLR-1622-48/24		
		24	12	ETLR-1622-24/12		
		12	6	ETLR-1622-12/6		
ETLR-16/31	3NO+1NC	230	110	ETLR-1631-230/110	2	
		130	48	ETLR-1631-130/48		
		48	24	ETLR-1631-48/24		
		24	12	ETLR-1631-24/12		
		12	6	ETLR-1631-12/6		
ETLR-16/2C	2 Changeover	230	110	ETLR-162C-230/110	2	
		130	48	ETLR-162C-130/48		
		48	24	ETLR-162C-48/24		
		24	12	ETLR-162C-24/12		
		12	6	ETLR-162C-12/6		

### Dimension (mm)

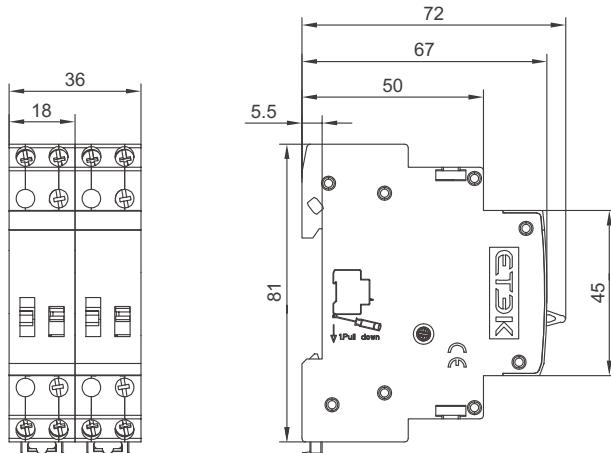

⚠ The product data referred to in the company shall be subject to material object. Subject to change without notice.  
The company has the final right to interpret.

♻ Green paper printing.

### Zhejiang Wenzhou Factory

#### ZHEJIANG ETEK ELECTRICAL TECHNOLOGY CO.,LTD.

No.288 Wei 17th Road, Economic Development Zone, Yueqing  
City, Zhejiang China.  
Tel: 0086-577-62718777 0086-577-62780116  
Email: info@etek-china.com  
Web: www.etek-china.com

[View More Product Information](#)



[www.etek-china.com](http://www.etek-china.com)



[www.etek-electric.com](http://www.etek-electric.com)

### Anhui Wuhu Factory

#### WUHU ETEK ELECTRIC CO.,LTD.

No.770 Wutun Fast Road, Anhui Xinwu Economic Development  
Zone, Wanzhi District, Wuhu City, Anhui Province, P.R.China  
Tel: 0086-553-8511789  
Email: sales@etek-electric.com  
Web: www.etek-electric.com

[Follow Us](#)

